THE EVERYDAY CITY

Homes, shared ground and public life before production-led expansion.




Concept rendering over original massing; details and eye-level interpretation are not surveyed evidence.

Jingyuan Huang | XCITY | Concept design review | 27 October 2026

A city of everyday centres

Whole competition site / fixed boundary / source-derived research framework

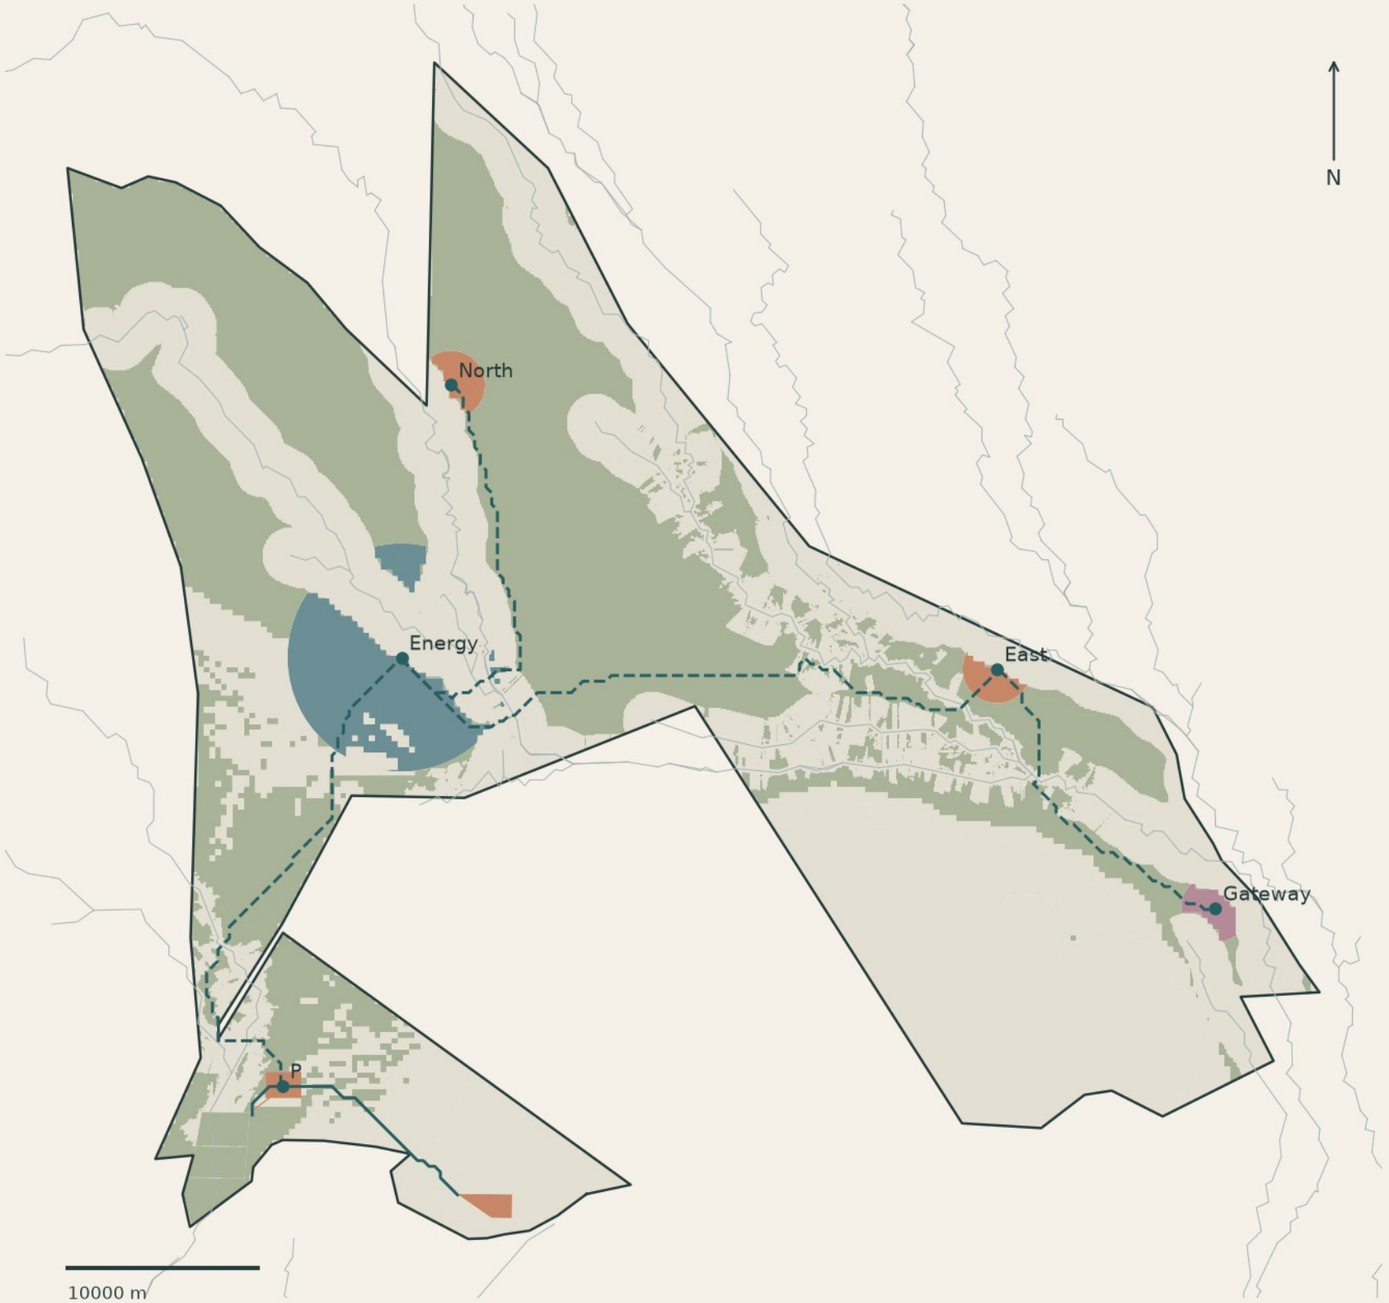

One main city first

A complete primary district supports daily life. Two conditional service towns grow only with their own services and resource contracts. The eastern gateway remains a later shared freight reserve.

Five systems, linked


Homes and public services define the primary city; regional energy and compute form a separate production backbone; agricultural research occupies low-slope land; repair and processing accompany centres; trade is reserved at the east.

Land is not installed capacity

Reserve colours show proposed roles, not realised buildings, irrigation or a verified resource entitlement. Fixed pilots remain unchanged.

Read the ground before drawing the city

DEM-derived screening is neither a lake nor a surveyed flood boundary

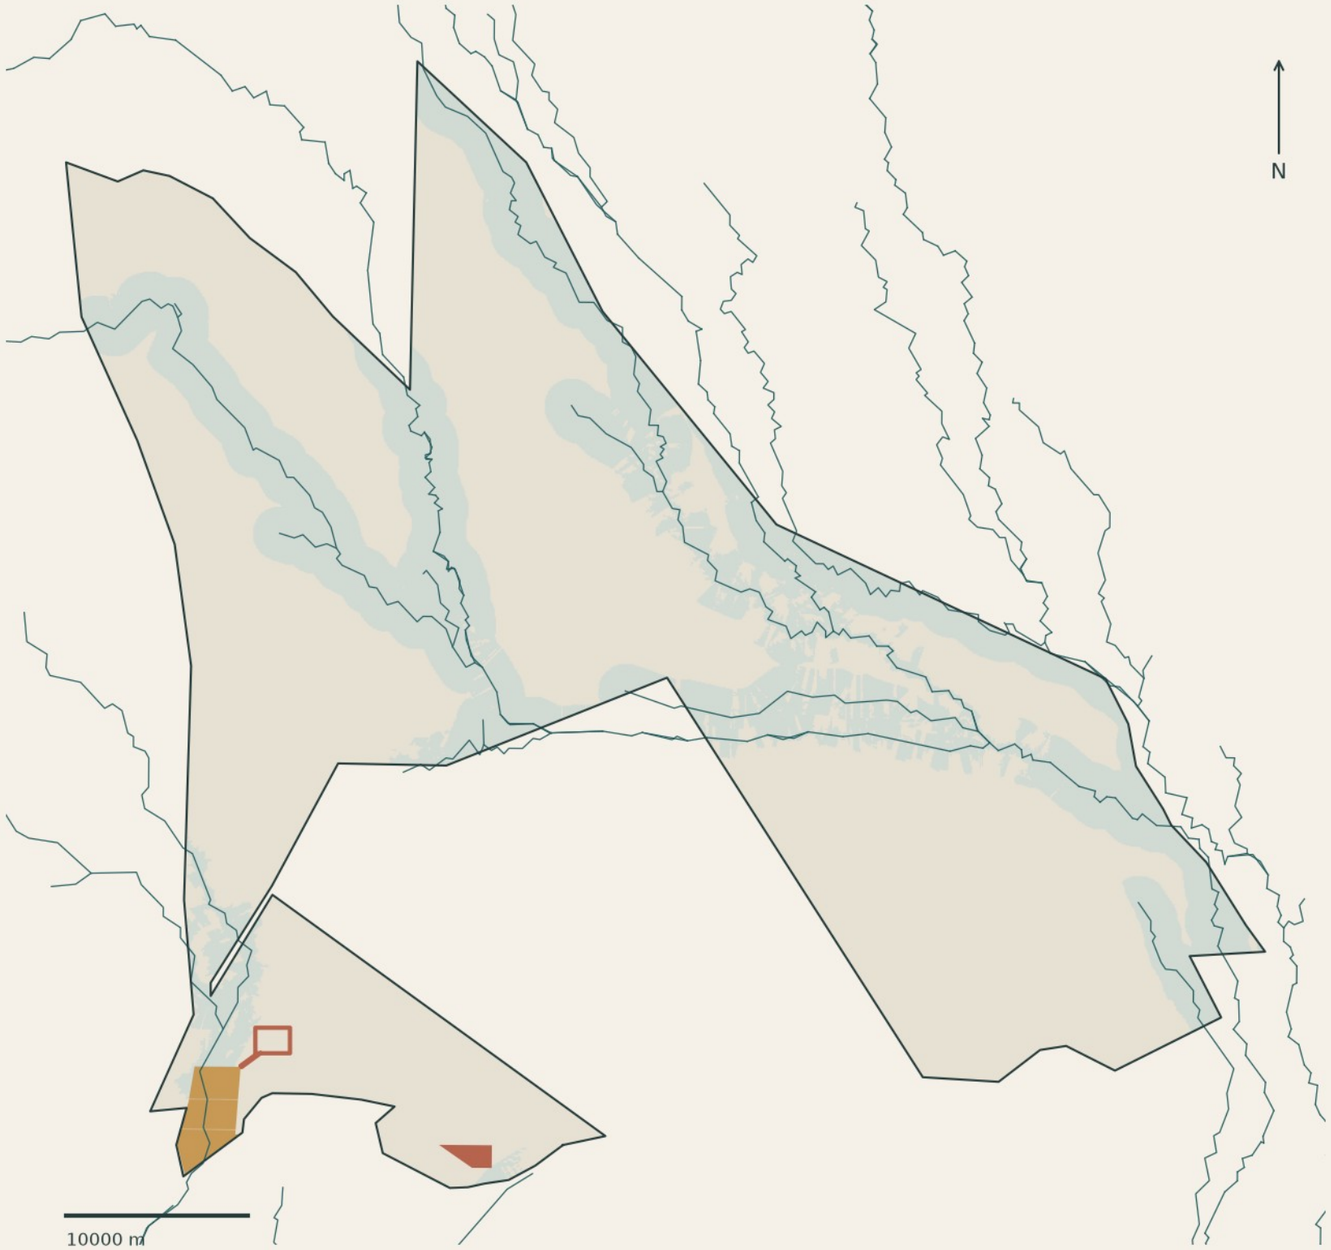

Fixed facts

The issued boundary covers 1,656.684229 km2 geodesically. The 13.9 km2 agrivoltaic pilot and 2.48 km2 first living-quarter outline are fixed separately. No internal stock or service capacity is invented.

Screening, then verification


60 m DEM and regional flood sensitivity inform siting. Neither proves site safety. Actual channels have no permanent construction. The first district is clear of the supplied 150 m channel-research screen.

Source

XCITY site package at 9e504de; boundary revision 2026-10-27-seam-closure. Survey, small washes and utility rights remain unverified.

Choose proximity without hiding the terrain cost

Three spatially meaningful fit tests / same 1.9 x 1.4 km programme

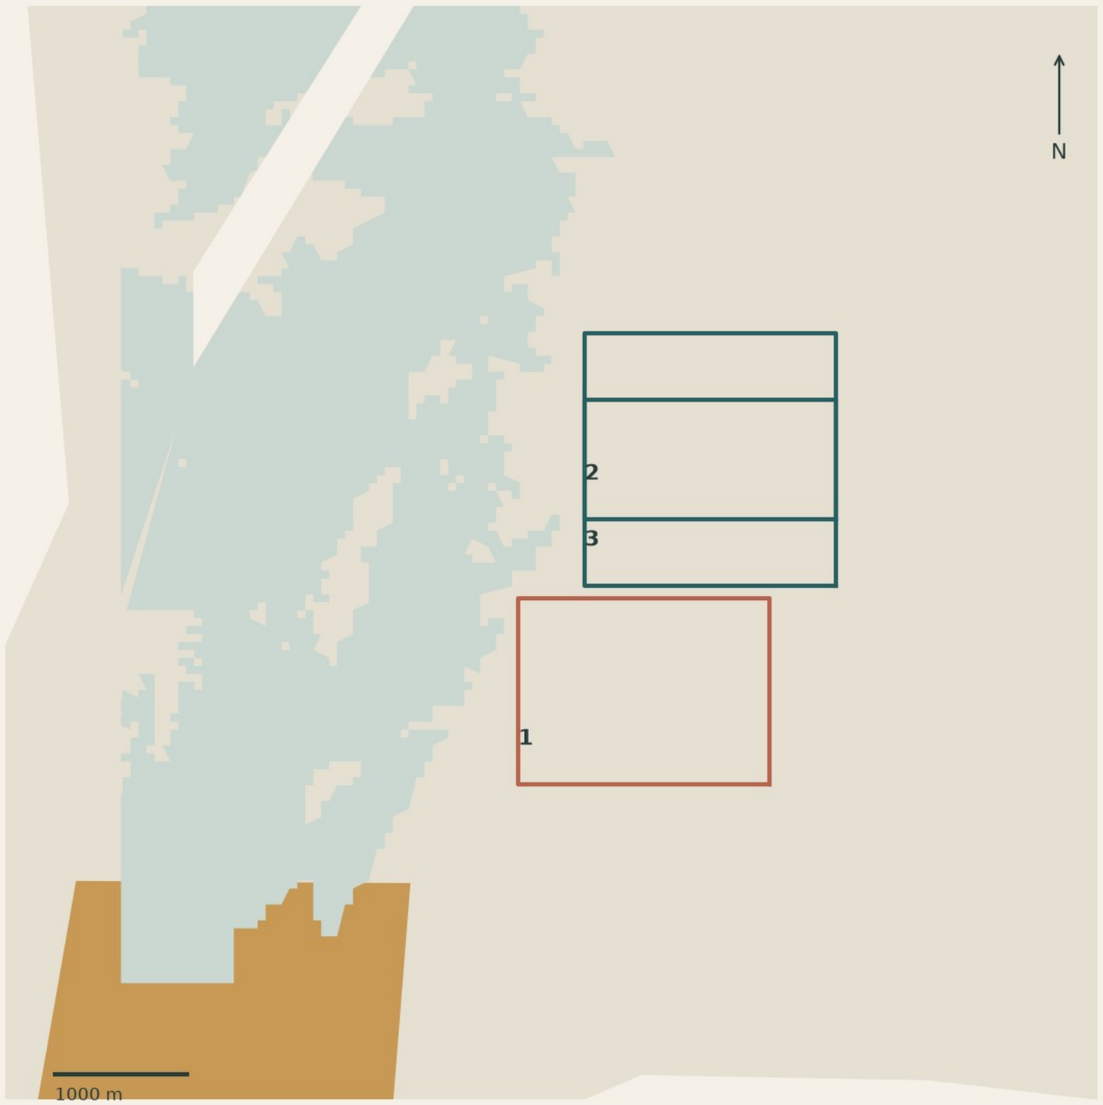

1 / Selected

About 1.1 km from the pilot, with a 2.64% mean screened slope. A productive trail reaches the actual fixed field edge. Cut/fill, drainage and accessible gradients need a detailed survey.

2 / Flatter but more remote


Mean screened slope 1.26%, about 3.0 km from the pilot. A simpler grading starting point, but weaker direct connection between farm services and city life.

3 / Intermediate

Mean screened slope 1.86%, about 2.6 km from the pilot. Not chosen because it adds distance without resolving external rights. Distances are geometric screening, not engineered routes.

Six neighbourhoods. One everyday spine.

Complete first district / 1,440 homes / 3,600 residents / services in the first phase

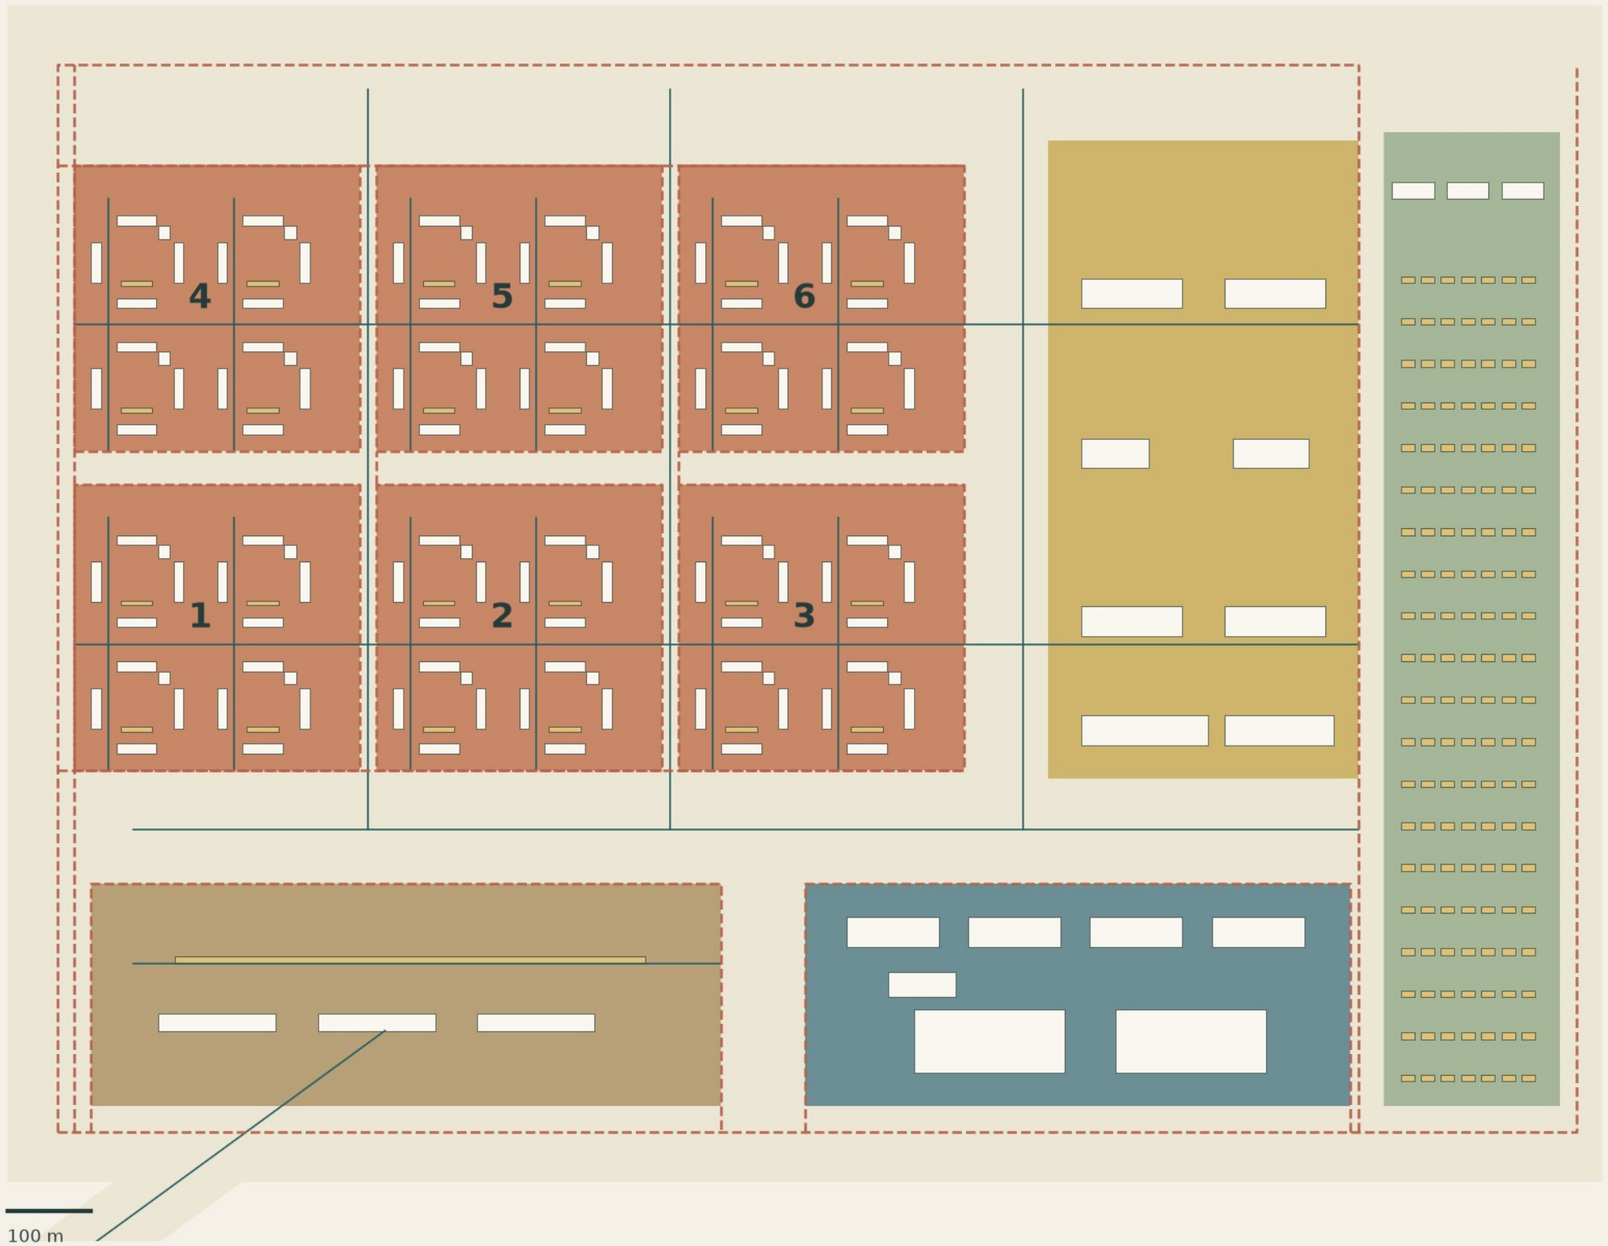

Homes

Six neighbourhoods. Each has four court units and 240 homes. Three-storey wings frame common rooms and shaded shared ground.

Public life


School, health, market, kitchen, library, childcare and indoor heat refuge line one civic spine.

Productive edge

Compute, workshops and farm services use perimeter freight access. Utility yards sit on the east edge.

A courtyard is a shared address

Urban-design enlargement / one complete 240-home neighbourhood

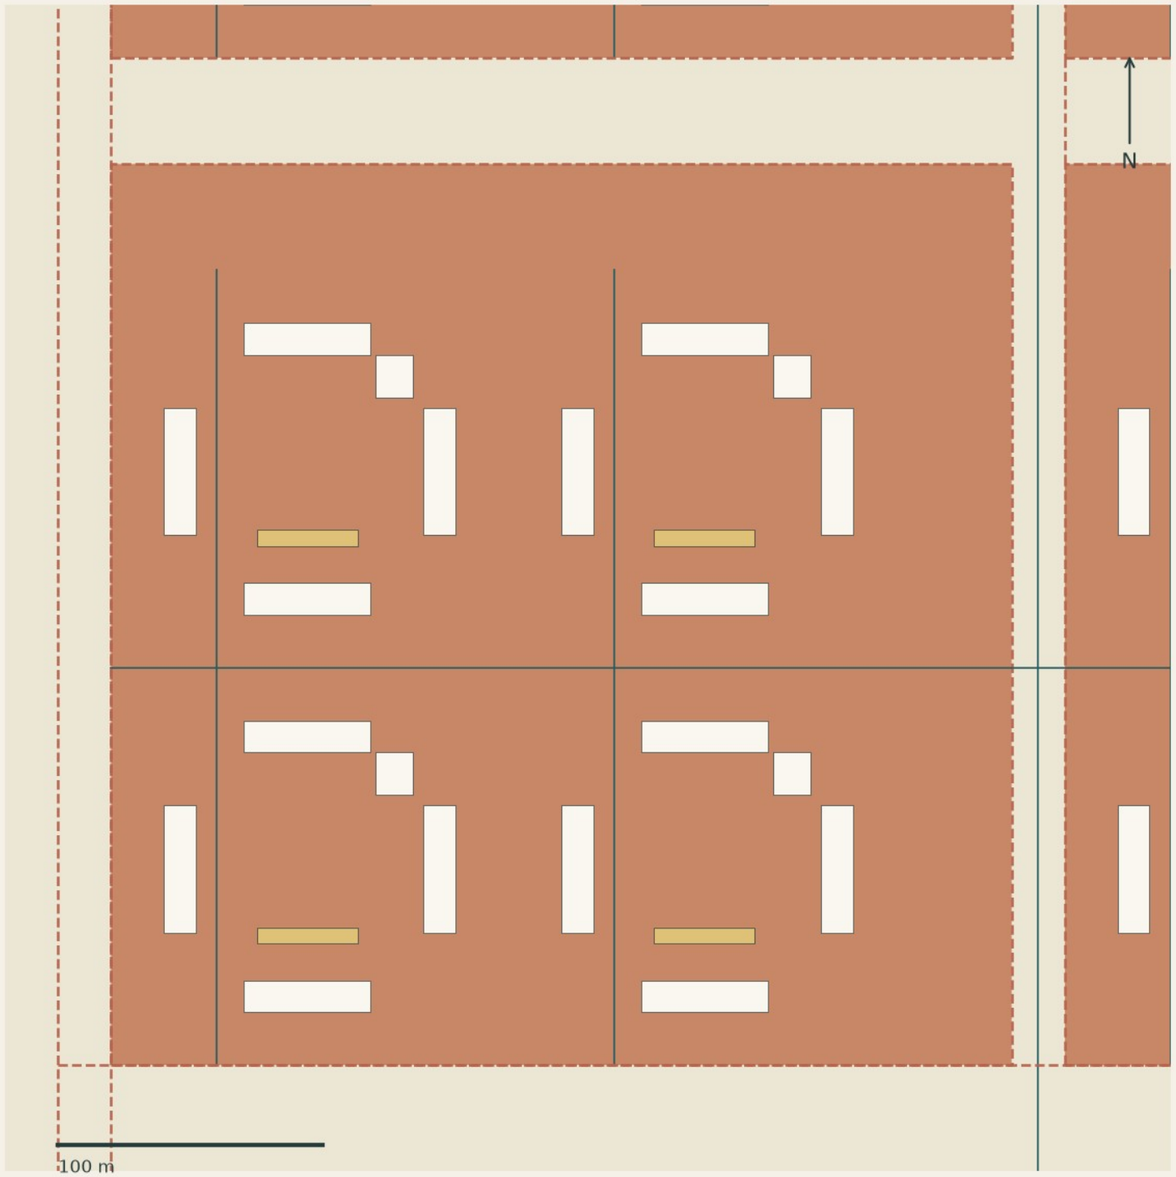

Four courts, different thresholds

Four groups each contain four 48 x 12 m residential wings, three storeys high, with 15 homes per wing. The open corners allow several entries rather than a gated superblock.

Daily use before spectacle


Shared laundry, a common room, shaded sitting and play belong to each court. The surrounding slow access loop supports emergency vehicles; inner walks remain pedestrian.


What remains to resolve

Dwelling plans, door positions, lifts and accessible gradients need the next architectural iteration. 115.2 m2 gross floor area per assumed dwelling is a capacity allowance, not saleable area.

Five homes per floor. Shared ground below.

A01 architectural concept / 48 x 12 m wing / dimensioned typical floor and section

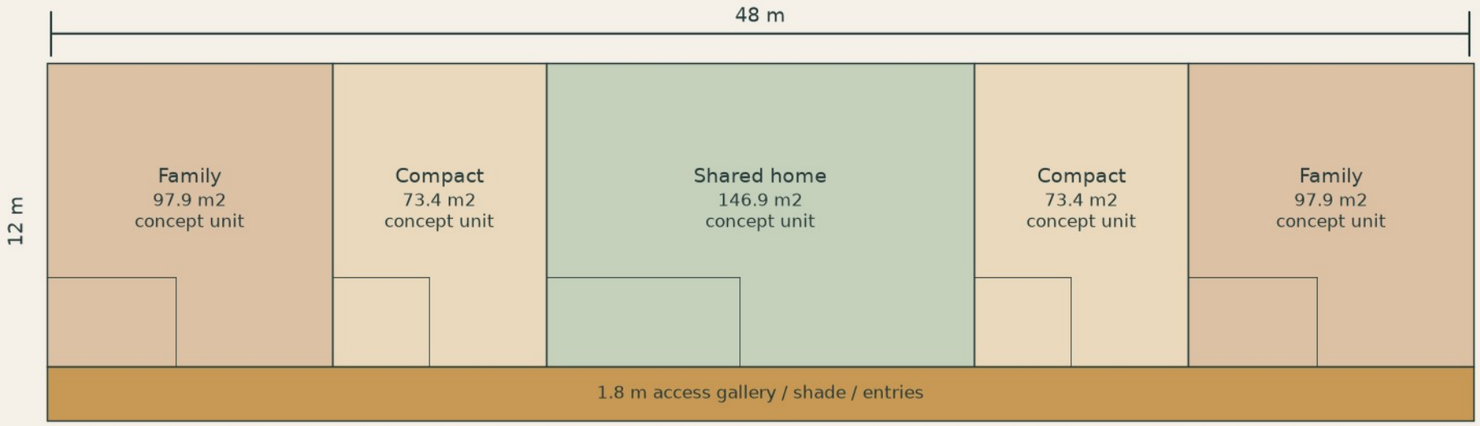

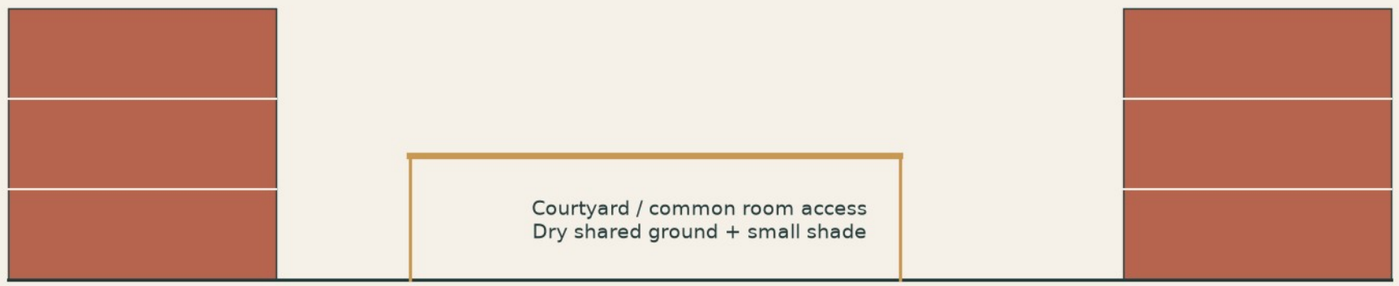

Capacity, not a sales plan

Five dwellings per floor x three floors = 15 per wing. Four wings = 60 per court. Four courts = 240 per neighbourhood. Gallery area is excluded from the concept unit area labels.

A range of households

The floor tests family, compact and shared-home widths within one consistent footprint. Indicative wet-core and living/quiet zones require actual room layouts, services and daylight checks.

Access and safety


1.8 m gallery is a design assumption. Stair/lift cores, accessible entrances, fire egress and seismic separation are unresolved architectural work; this sheet does not claim code compliance.

The public street earns its space

Civic and service section / declared dimensions, not construction engineering

Human scale, lower-rise form

Courtyard housing reaches 9.9 m; public buildings reach 6.6 m. Lightweight shade is conceptually 4.5 m high. Short independent wings require seismic separation, structural design and roof wind-load verification.

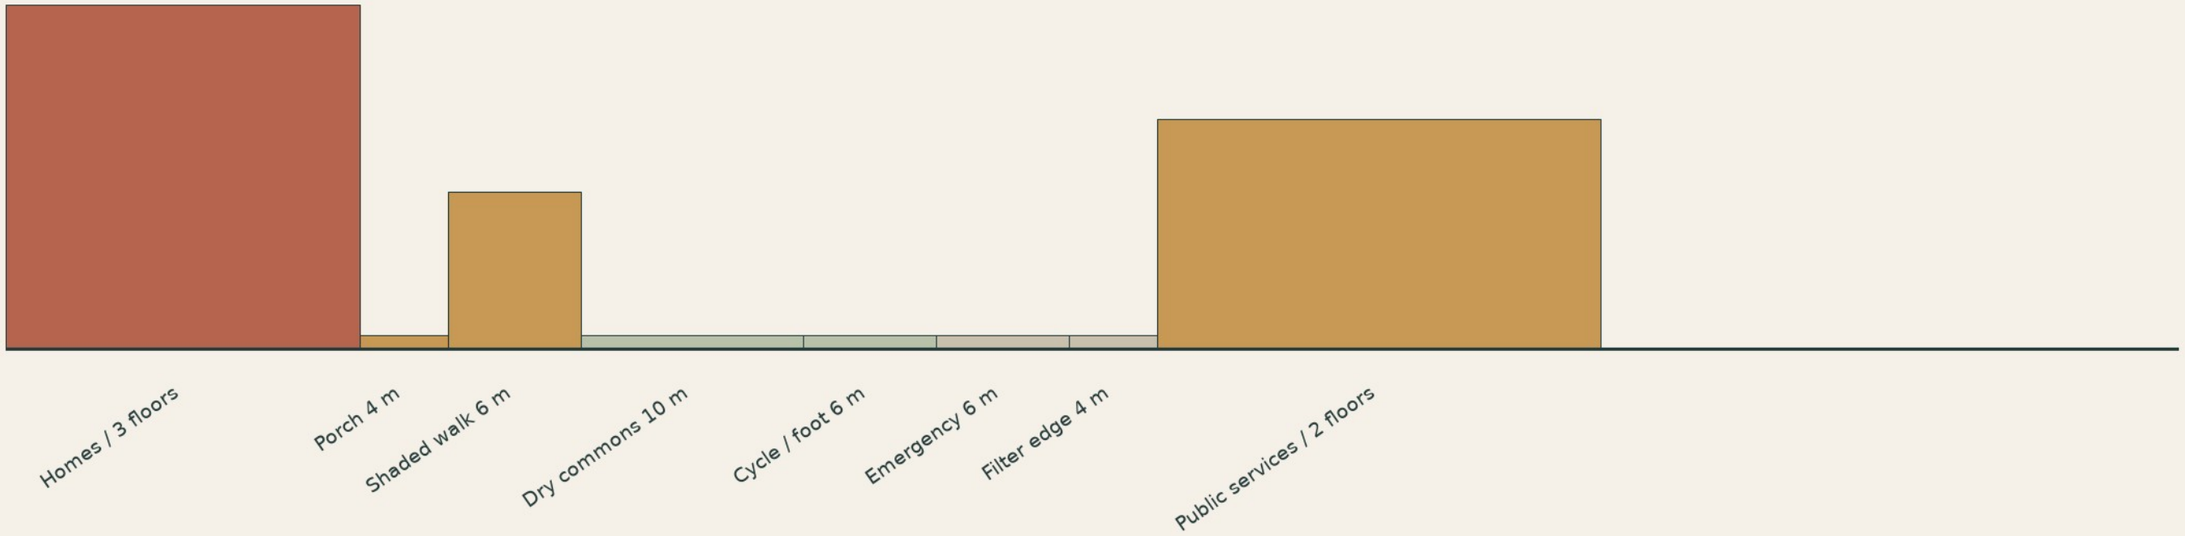


Heat and wind

Shade protects routes and edges; indoor refuge handles extreme heat. No lawn or decorative lake. Wind-filtering edges are a design hypothesis, pending local wind and thermal testing.

One service spine, several public thresholds

Civic enlargement / real model locations / phase-one programme allowances

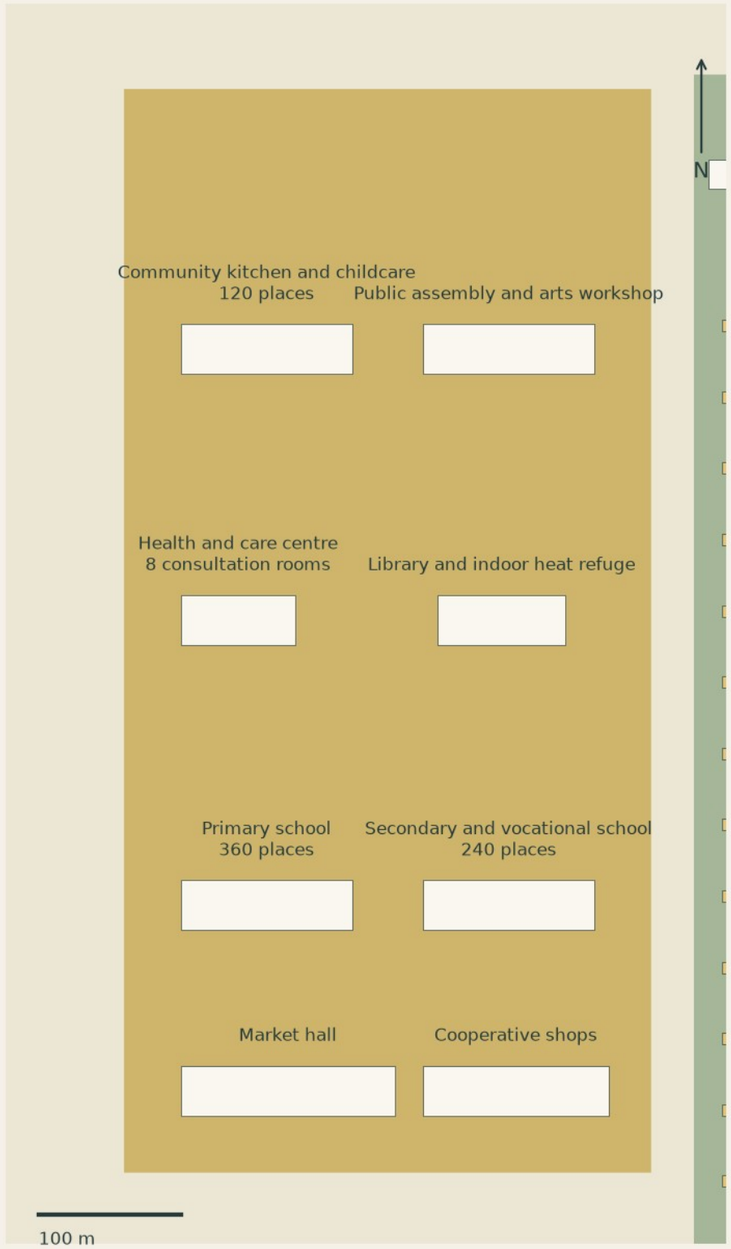

School and care

360 primary and 240 secondary/vocational places; 120 childcare places. These are capacity assumptions linked to the resident scenario, not established facilities.

The right to remain


Market, kitchen, library, arts/assembly and an indoor heat refuge support several generations. No purchase or employer badge is required to enter public ground.

Servicing behind public life

Civic vehicle access uses the eastern emergency spine. Loading, kitchen waste, care drop-off and emergency turning must be resolved at each actual door before implementation.

People first. Every crossing visible.

Actual line intersections registered; the crossing count is not a safety score

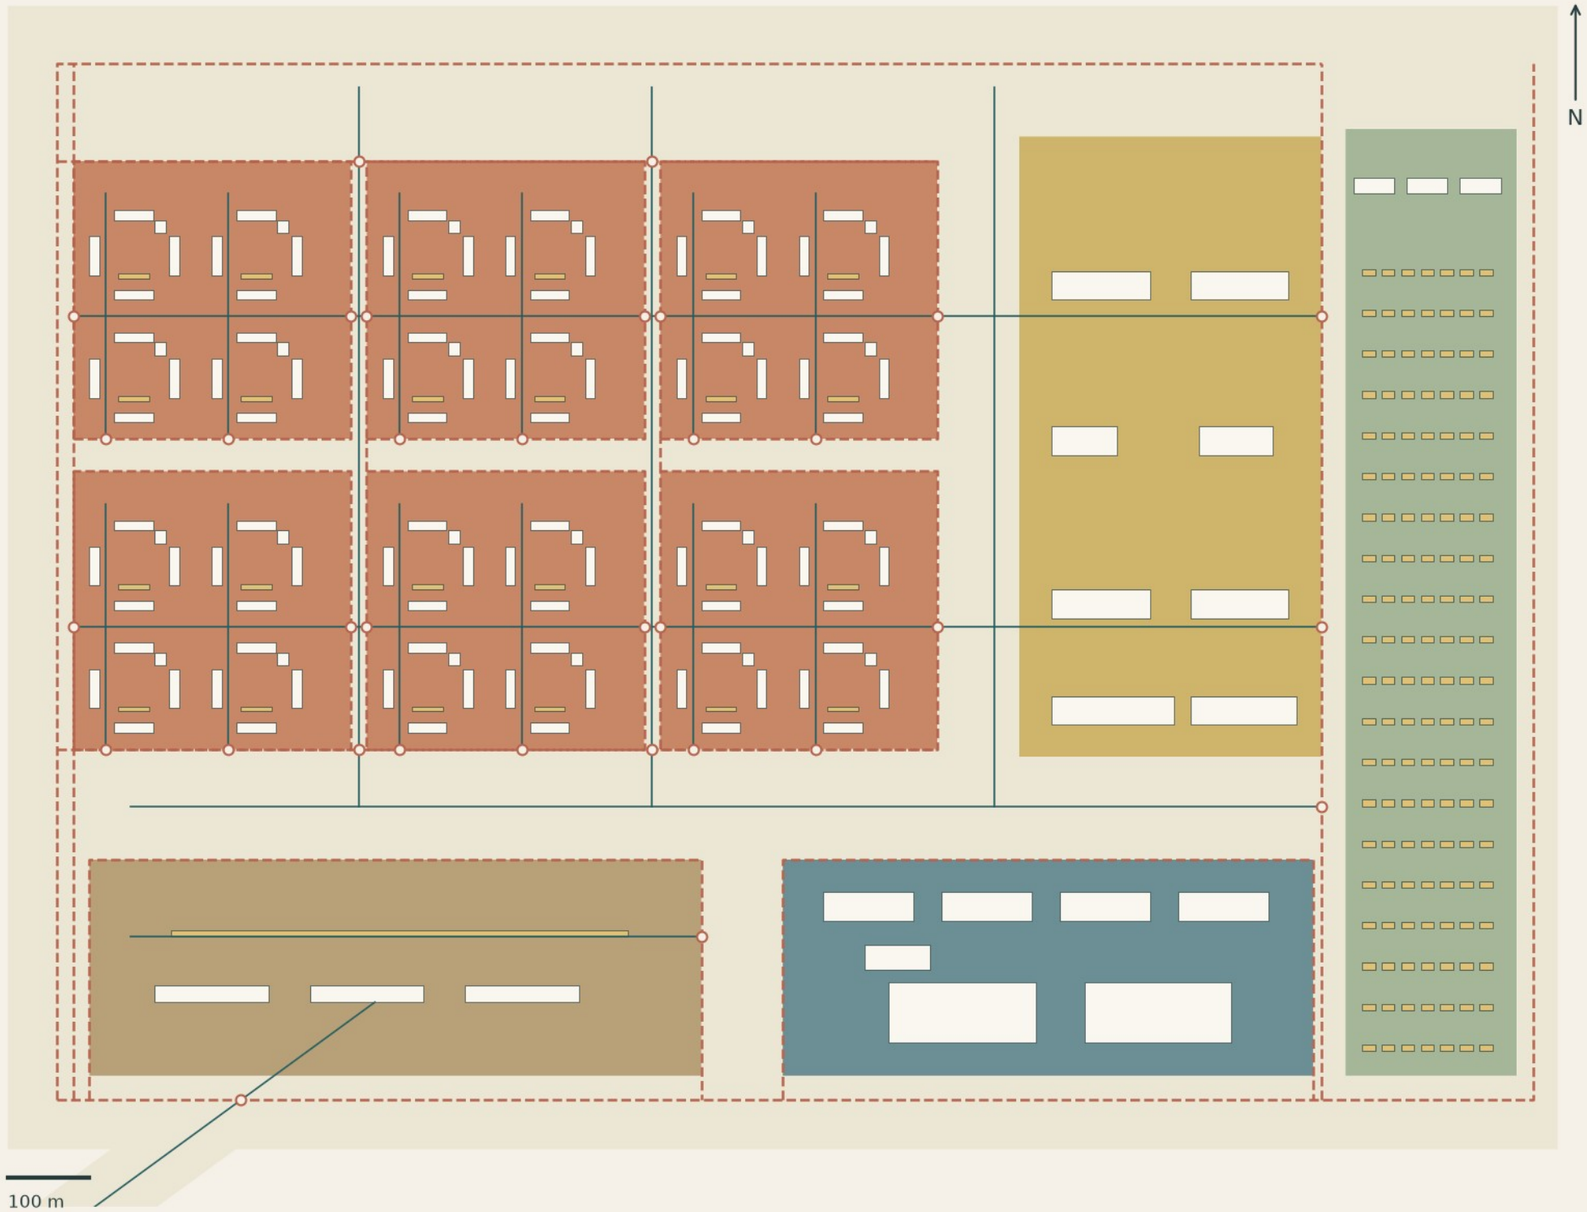

Public network

Court walks join two transverse public routes and the civic spine. A longer productive trail connects to the fixed farm edge.

Controlled interfaces


33 same-level interfaces are recorded from line geometry. Shared loops are 10 km/h concept operation; pedestrian crossings require machine stop and manual release.

Next check

Audit actual doors, dropped kerbs, waiting space, corner visibility and turning envelopes. Path/building conflicts are tested separately.

Infrastructure has a route, a capacity and a limit


Resource diagram / proposed links; no existing supply or utility rights asserted

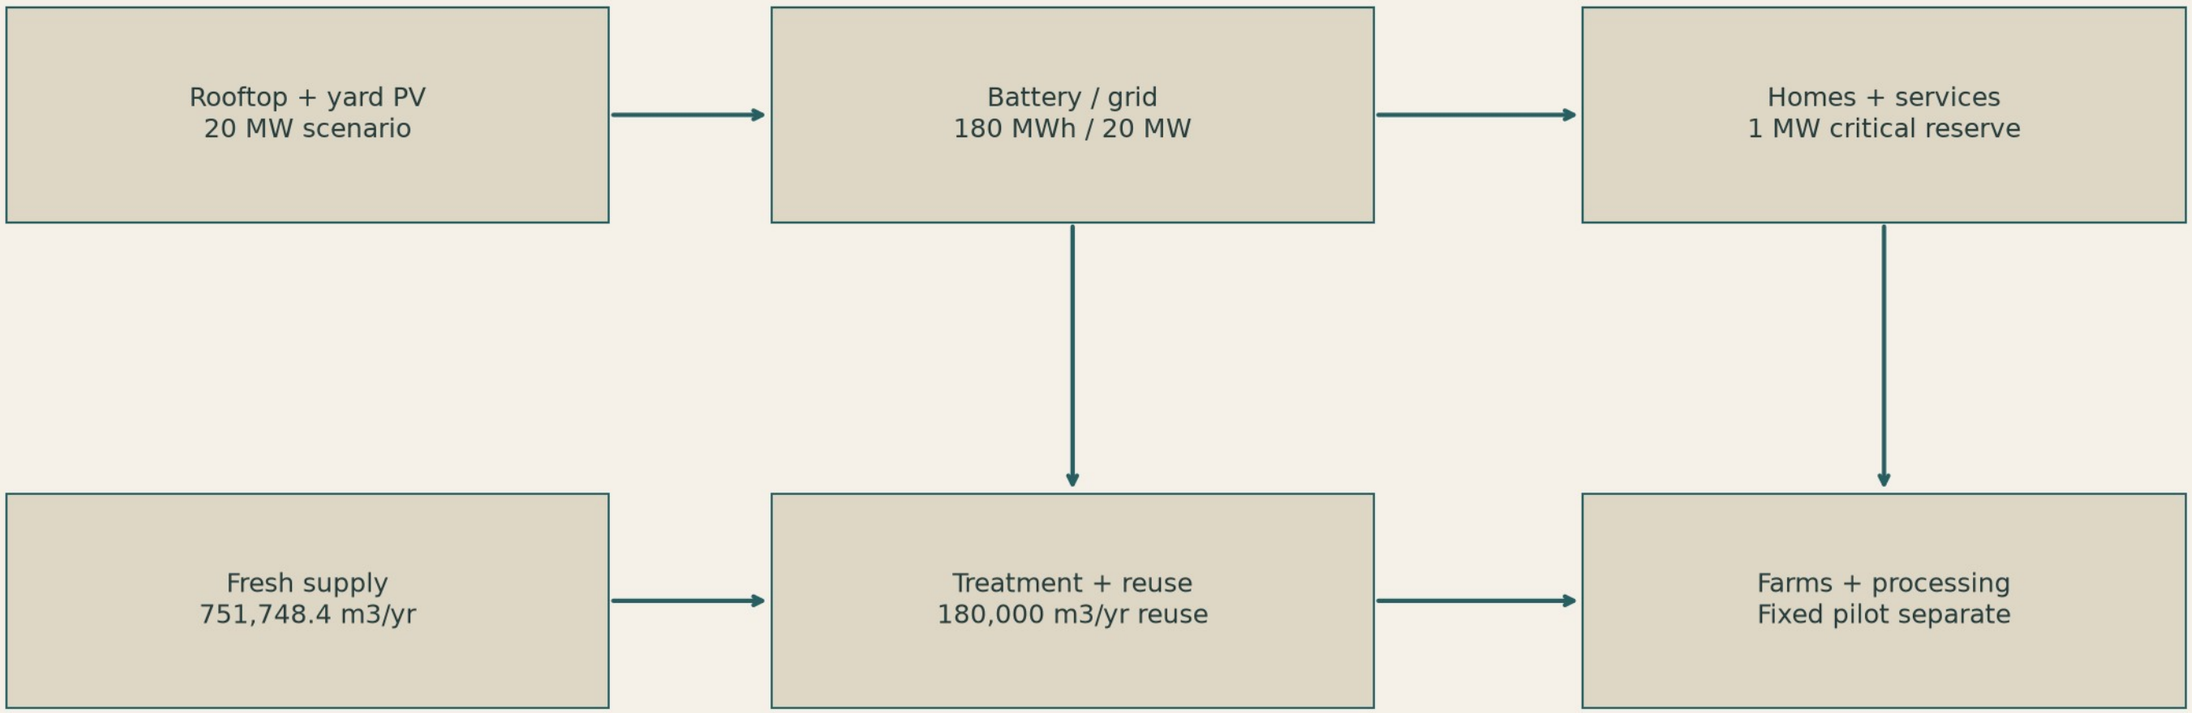

Grid, water and communications alignments are research assumptions. Waste, treatment, pressure, cable routes and utility approvals require specialist design.

One water account. Real priorities.

Full first-phase use scenario / fixed pilot demand is an unverified placeholder

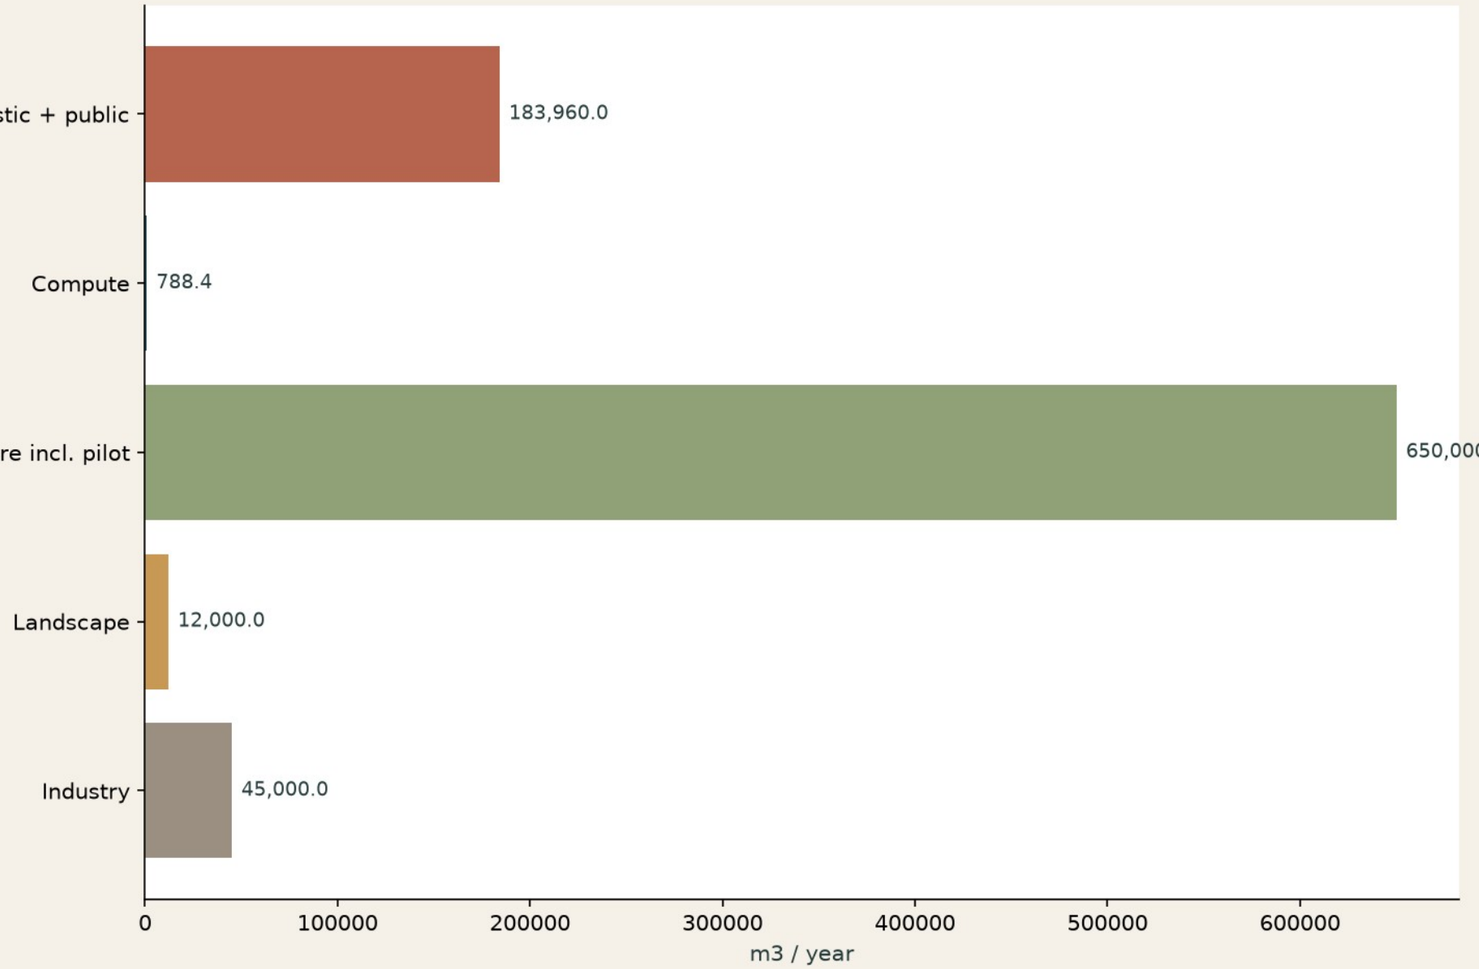

891,748.4 m3 / year

183,960 domestic; 788.4 compute; 650,000 agriculture including a 600,000 fixed-pilot placeholder; 12,000 landscape; 45,000 industry. Actual pilot and fixed living-quarter demand must be verified.

Supply scenario


180,000 m3 reuse plus 711,748.4 delivered fresh water. With 40,000 distribution losses, fresh abstraction would be 751,748.4 m3. None is an acquired water right.

30% gross-use reduction

Cut 12,000 landscape, 35,000 industrial, 180,000 agricultural and 40,524.52 discretionary domestic/public use. Residual domestic allowance is about 109 L/person/day. Pilot reductions require operator agreement.

Energy serves a complete city

Solar, storage and a flexible 8 MW IT peak / hourly simulation disclosed separately

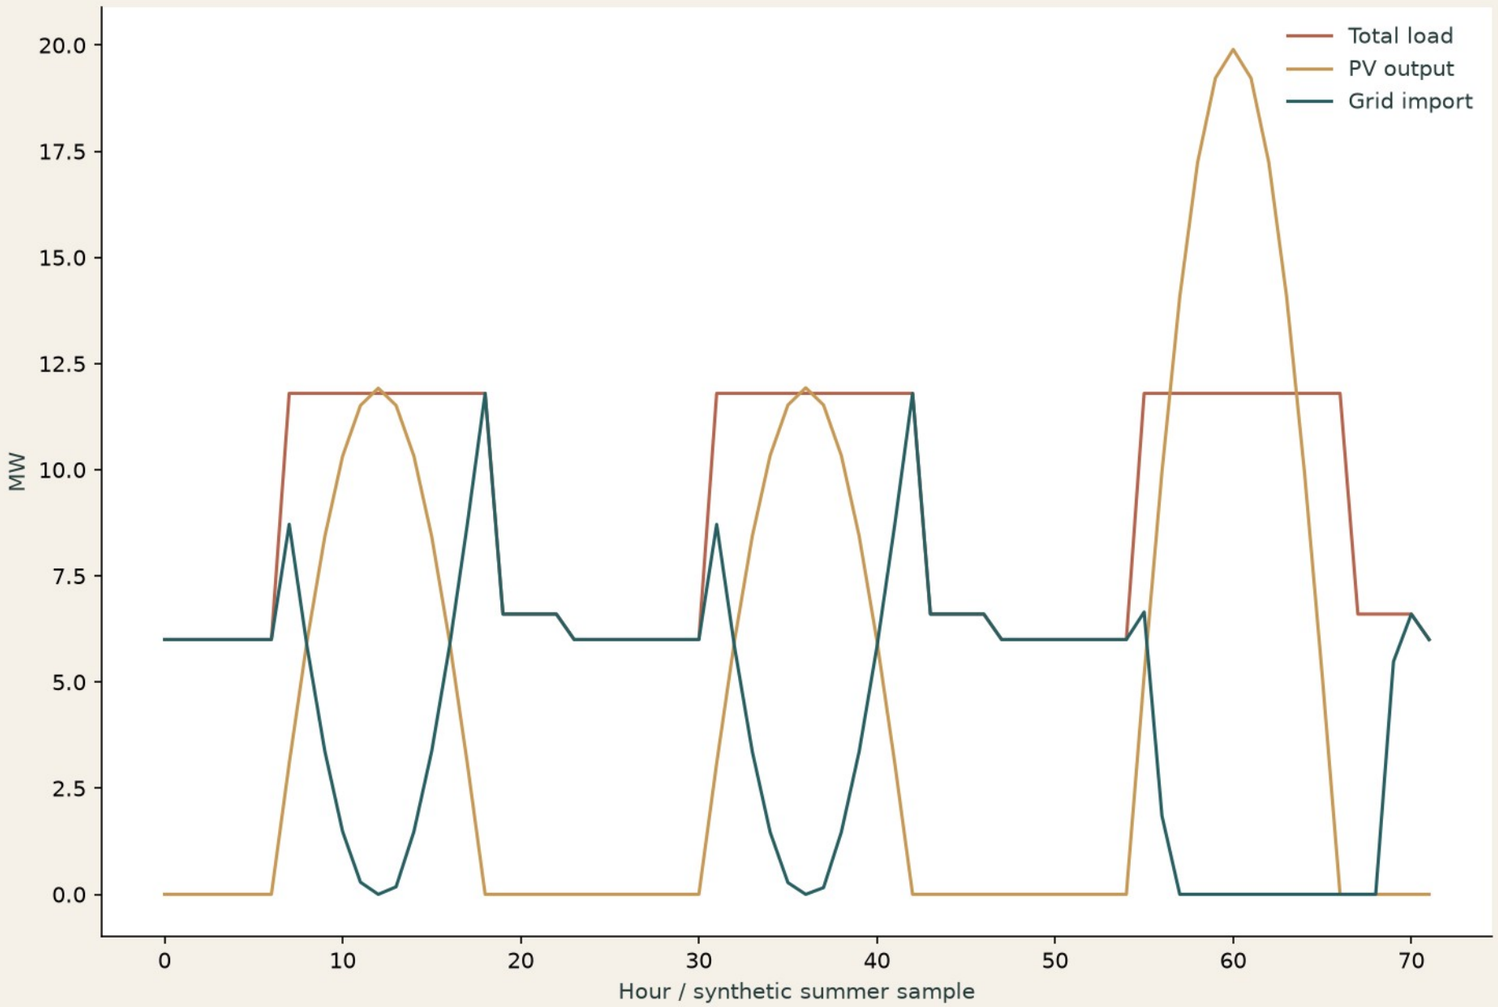

Declared supply scenario

20 MW PV and 180 MWh battery; grid limit 20 MW. Battery protected reserve 72 MWh supports a 1 MW critical-service scenario for 72 hours, subject to equipment and load verification.

Two matching measures


Fully matched hours: 29.83%. Clean-energy share: 54.38%. Synthetic 8,760-hour dispatch is a scenario, not site climate or a supply contract.

Heat has a receiver

2,628 MWh/year usable heat target goes to named drying and processing workshops. Temperature lift, losses and seasonal demand require equipment and customer contracts.

Three places test the same city

A01 homes / B03 useful compute / C02 the working farm edge

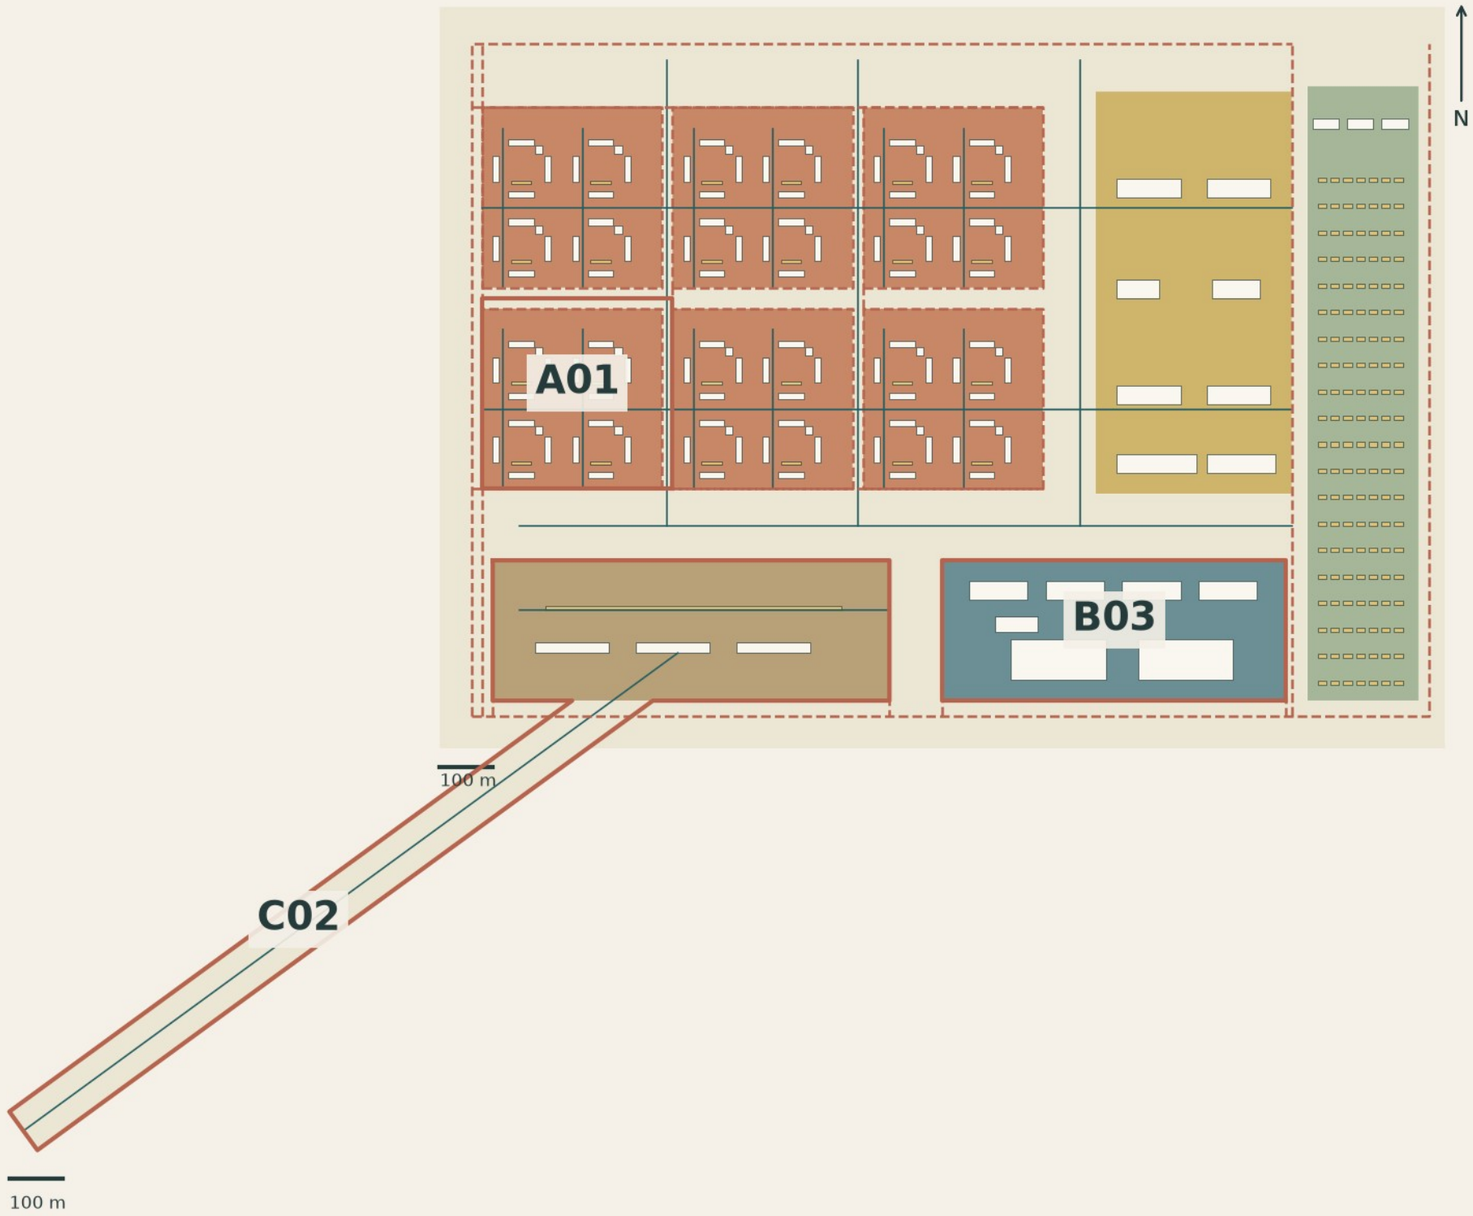

A01 / Courtyard Homes

Inside the western neighbourhood. A complete court and its shared services test everyday life without employer-controlled housing.

B03 / Useful Compute


At the southern productive edge. Separate service access, heat reception and paid maintenance connect production to public benefit.

C02 / Working Farm Edge

The southwest service campus and trail reach the actual fixed pilot edge. No new buildings enter the pilot.

A01 / Courtyard Homes

Detailed concept plan / location, dimensions, access and use

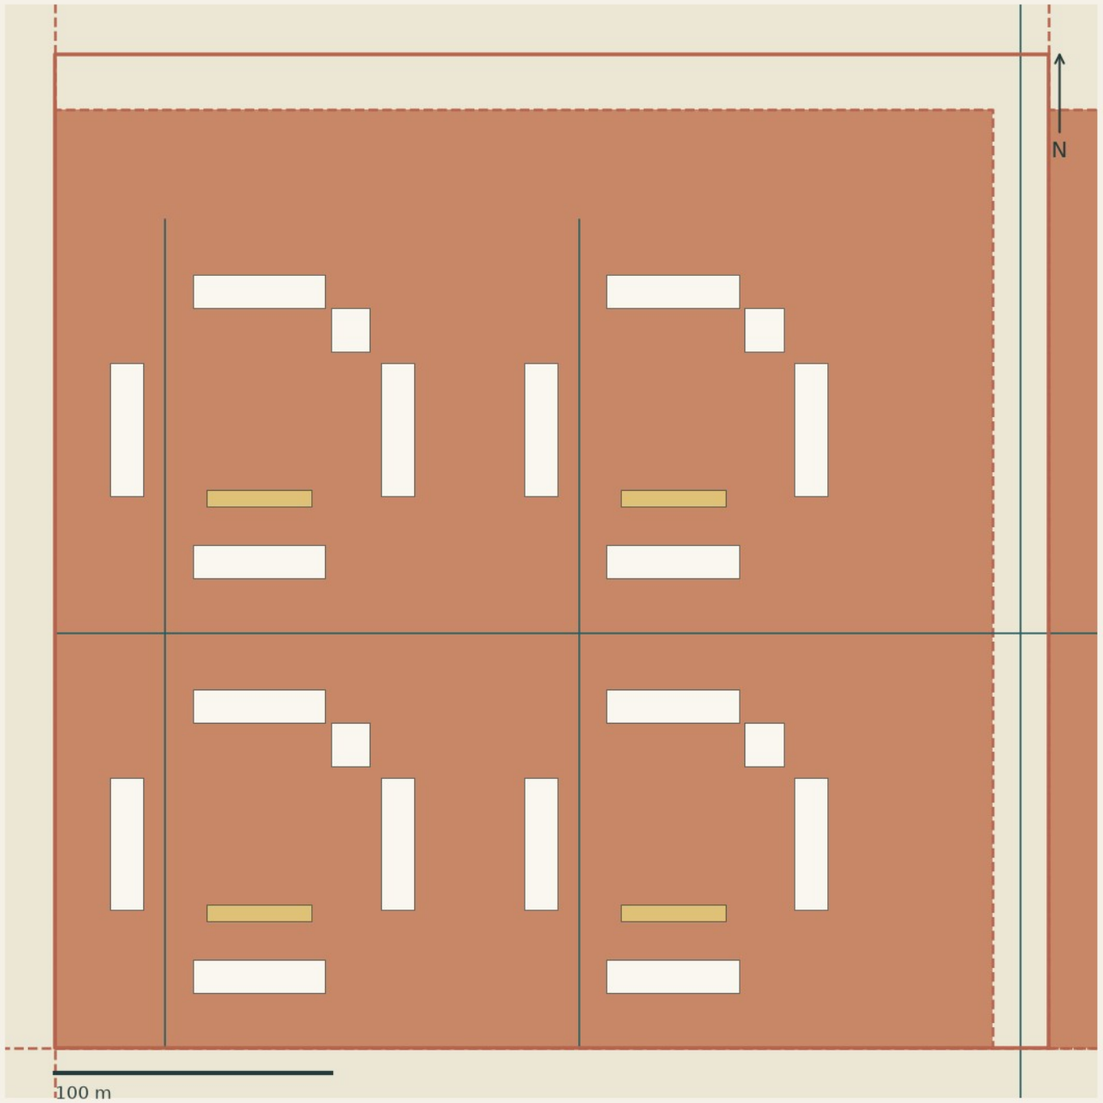

Everyday home

Four courts contain 240 homes, shared laundry and common rooms. Flexible household tenure accommodates residents, rotating workers and care households without tying the home to a job.

Normal / exceptional use

Morning school trips and shared meals use the pedestrian interior. In heat or Zonda alerts, common rooms become indoor refuge; emergency access remains on the perimeter.

Architectural next step

Resolve real apartment layouts, accessible entries, shaded thresholds, fire separation, acoustic privacy and seismic joints. Shared ground needs a funded resident-managed maintenance agreement.

A01 / Courtyard Homes

Aerial concept view + eye-level experience / same design place






Concept rendering over original massing; details and eye-level interpretation are not surveyed evidence.

Jingyuan Huang | XCITY | Concept design review | 27 October 2026

B03 / Useful Compute

Detailed concept plan / location, dimensions, access and use

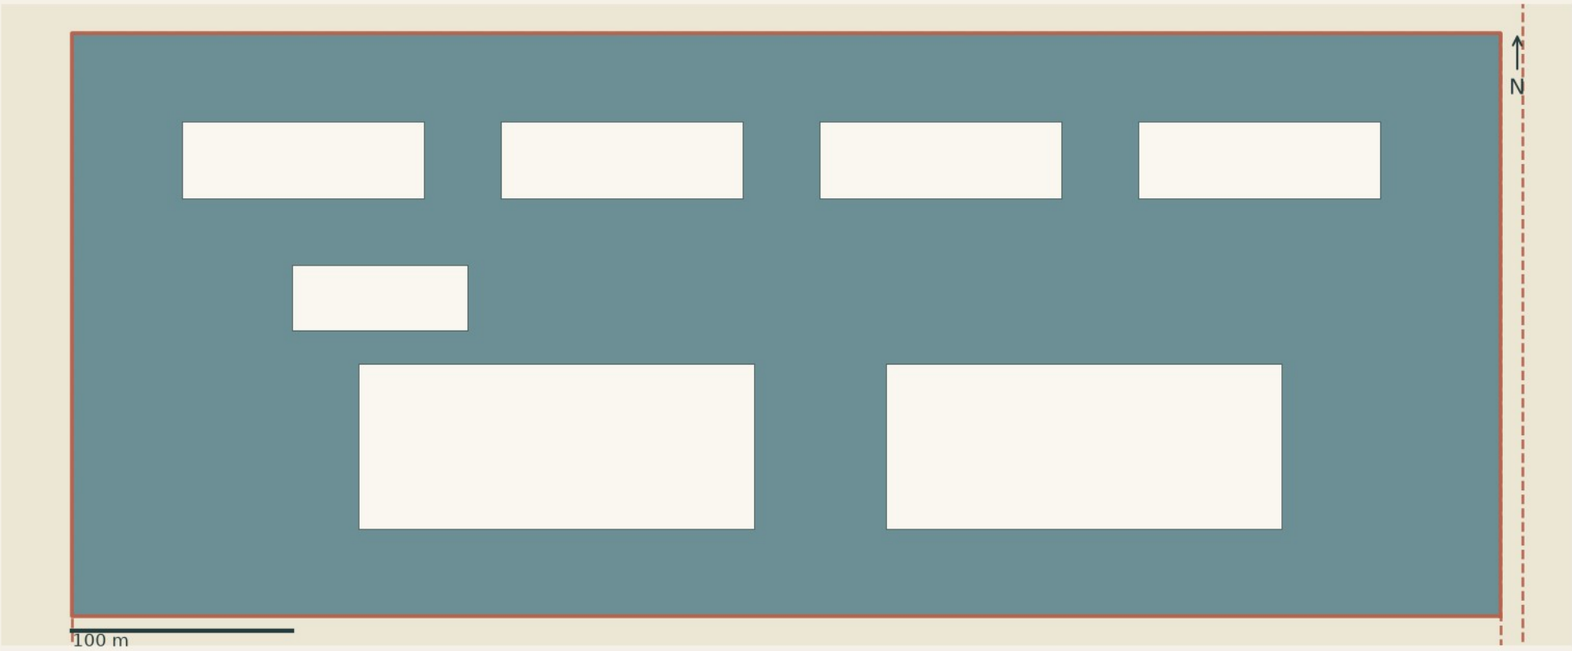

Useful production

Two 180 x 75 m halls, four 110 x 35 m workshops and an 80 x 30 m heat reception building form a service campus. A service loop remains south of everyday living.

Normal / exceptional use

Separate delivery, repair and public learning access. Dry cooling avoids evaporative towers; high heat can increase electrical demand and reduce IT output. Workers retain pay during contracted reassignment.

Heat and accountability

A 5% IT-energy heat-use target names the processing workshops as receivers. A physical meter, operating contract and fallback heat rejection are required; arrows alone do not prove reuse.

B03 / Useful Compute

Aerial concept view + eye-level experience / same design place






Concept rendering over original massing; details and eye-level interpretation are not surveyed evidence.

Jingyuan Huang | XCITY | Concept design review | 27 October 2026

C02 / Working Farm Edge

Detailed concept plan / location, dimensions, access and use

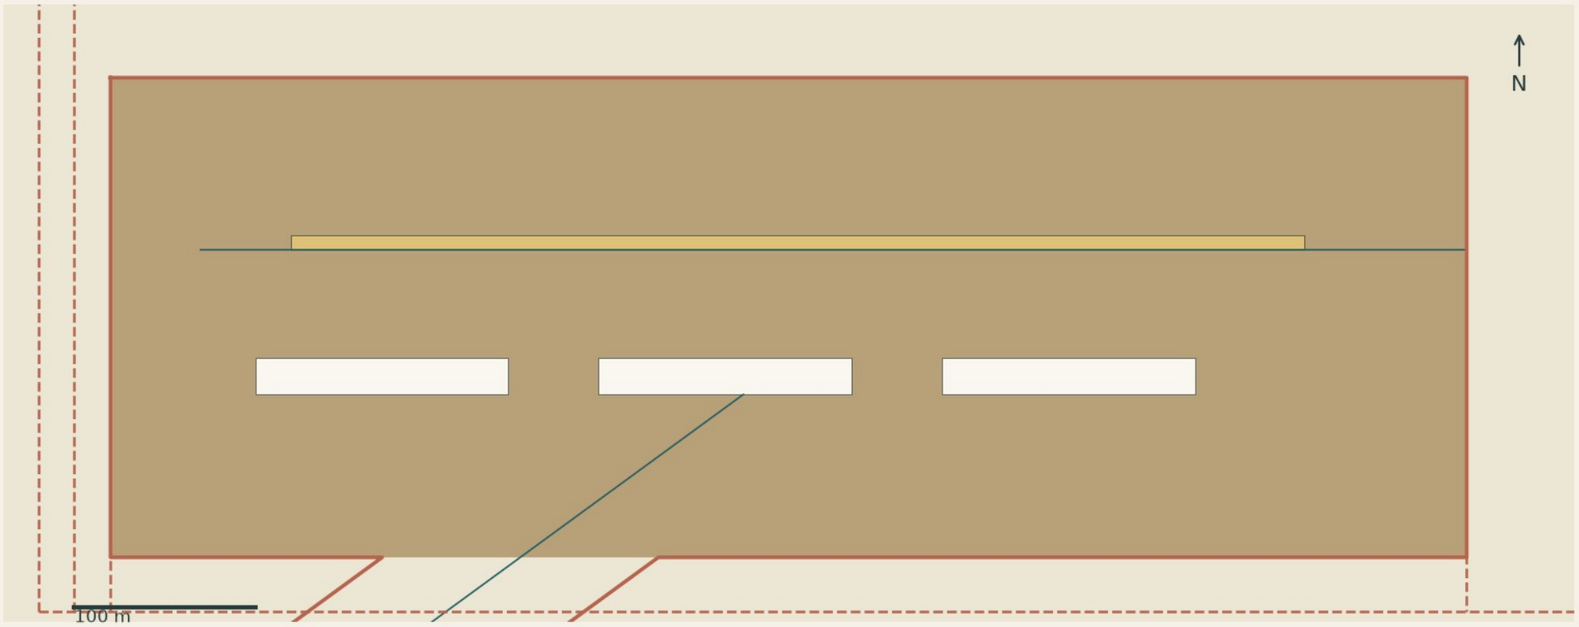

A working boundary

Three 140 x 20 m teaching and service buildings support repair, sorting and training. A 560 x 8 m shaded public frontage leads to a productive trail and the real protected field edge.

Normal / exceptional use

Visitors stop at managed viewing gates. Farm servicing uses the rear loop; the trail is closed in dust or storm alerts. No tall crops are proposed under fixed arrays.

Scope and honest distance

This is a linked interface, not a claim that the city touches every field. The trail and service alignment require wash, gradient and rights verification. The original pilot remains unchanged.

C02 / Working Farm Edge

Aerial concept view + eye-level experience / same design place





Concept rendering over original massing; details and eye-level interpretation are not surveyed evidence.

Jingyuan Huang | XCITY | Concept design review | 27 October 2026

Build a complete first chapter

First works and observable growth triggers / no automatic expansion dates

00 / VERIFY

Survey, small washes, soils, water rights, utility and external access commitments. No occupancy promised.

01 / COMPLETE

Access + emergency; water and sanitation; primary power; homes + school + care; market + maintenance. Later phases may stop.

02 / CONNECT

North town and energy backbone only after audited resource margin >=20%, occupancy >=80%, funded services and safe access.

03 / GATEWAY

Eastern town and freight reserve only with binding demand, verified corridors, resource capacity and funded local services.

Housing is not a labour contract

Governance, work and public-service continuity

Homes and common ground

A proposed civic housing trust holds common land and essential service assets. Mixed tenure includes a declared 25% protected rental target. Residents have public access and housing rights independent of a compute operator. This is a proposed governance model, not an existing legal entity.

Jobs and skills

1,500 jobs: 300 care/education, 300 farm/food, 220 repair, 180 energy/compute, 250 retail/culture and 250 utilities/logistics/administration. Of these, 1,350 are held by residents and 150 by incoming specialists. Training needs named providers and funded paid placements.

A population account

3,600 residents: 1,350 local workers, 200 remote workers, 1,000 children/students, 500 retired adults and 550 carers or jobseekers. These exclusive scenario categories sum to the resident target. Pensions, household transfers and remote income support non-local employment.

Public audit and exit

Hourly aggregate energy/water/compute records; daily published summaries; annual independent meter and financial audit. Household tracking is excluded. AI suggests schedules; humans retain authority over basic service priority. Operator exit triggers an asset handover and reserve-funded service continuity plan.

Know what is designed, assumed and unresolved

Review dashboard / numbers are not approval

Phase-one district	2.770 km2 planar; geodesic account separate
Homes / residents / jobs	1,440 / 3,600 / 1,500 scenario
Residential form	96 wings; 3 floors; 24 courts
Public facilities	360 primary + 240 secondary school places; 120 childcare
Peak / mean IT	8 MW / 6 MW; PUE 1.30 target
Gross water use	891,748.4 m3/year scenario
Critical electricity reserve	72 MWh deliverable scenario
Same-level interfaces	33
Fixed-pilot building overlap	0.00 m2
Land account gap	0.00 m2

Accepted trade-off

Sacrifice uninterrupted compute output and the shortest possible productive routes to protect independent housing, public life and a clear service boundary.

Unresolved engineering

Survey, hydrology, access rights, utility capacity, seismic and fire design, grading and actual dwelling plans remain unverified. Regional routes are 300 m-grid studies.

Submission status

Independent new review package. English public material; A/B/C IDs only. Organiser machine rules still use old IDs, so no current gate pass or public submission is claimed.