AGUA FINITA

CONTINUOUS LIVING DISTRICTS / INDEPENDENT PRODUCTION



CENTRE DISTRICT / LOCAL AERIAL


Shade and daily life shape the public centre. The full-site regional framework and the independent productive system are explained in the following plans. AI-finished concept image.

JINGYUAN HUANG

27 OCT 2026 / V11

Whole-site zoning, road framework and landscape links

The complete issued boundary / six named regions / routes and landscape line widths are diagrammatic, not surveyed setbacks or installed works.

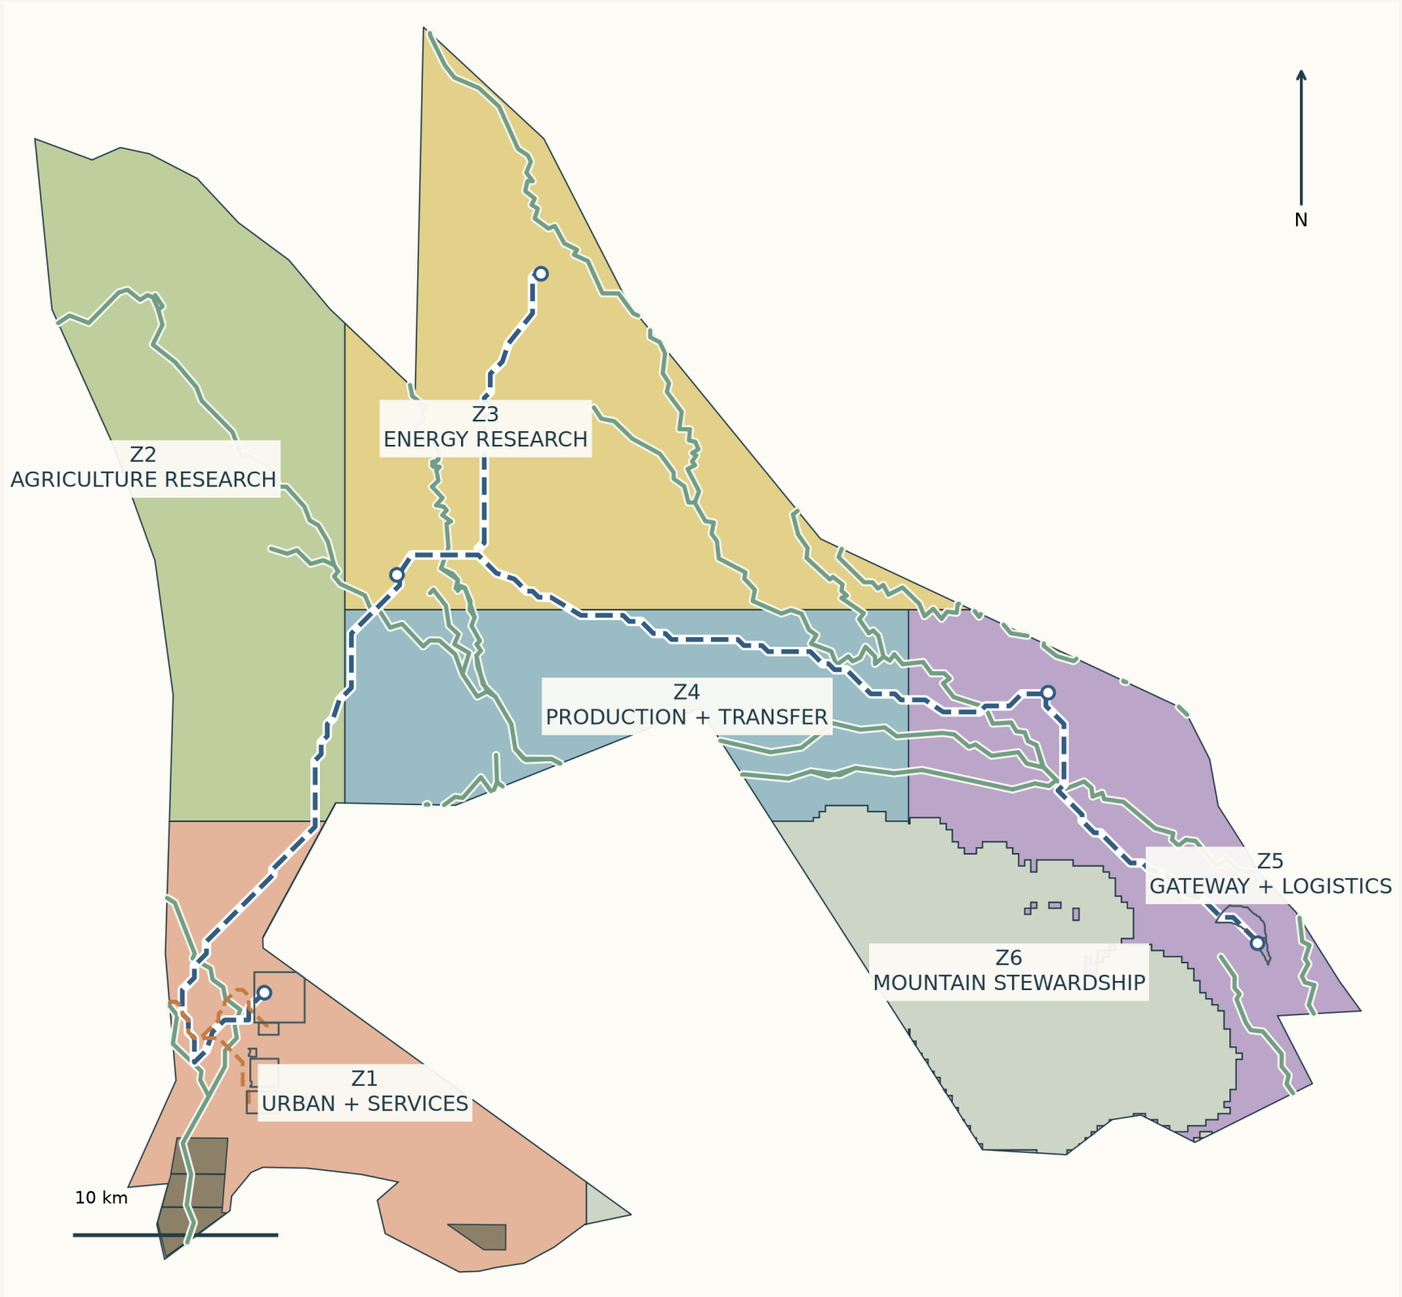

Z1 / Southwest urban and service

232.6 km2 gross / proposed role

Z2 / Northwest agricultural research

341.2 km2 gross / proposed role

Z3 / Northern energy research

392.3 km2 gross / proposed role

Z4 / Central production and transfer

238.2 km2 gross / proposed role

Z5 / Eastern gateway and logistics

227.5 km2 gross / proposed role

Z6 / Southeast mountain stewardship


226.1 km2 gross / proposed role

Blue dashed: regional road studies. Ochre dashed: arrival/freight approaches. Green: seasonal wash landscape. Hollow nodes: conditional transfer/service anchors. Fixed pilots retain their outlines.

Housing | Mixed centre | School | Dry parks | Production | Solar

The whole site and the complete proposed settlement system

Issued boundary retained / full planned construction is distinguished from territorial options and unbuilt land.

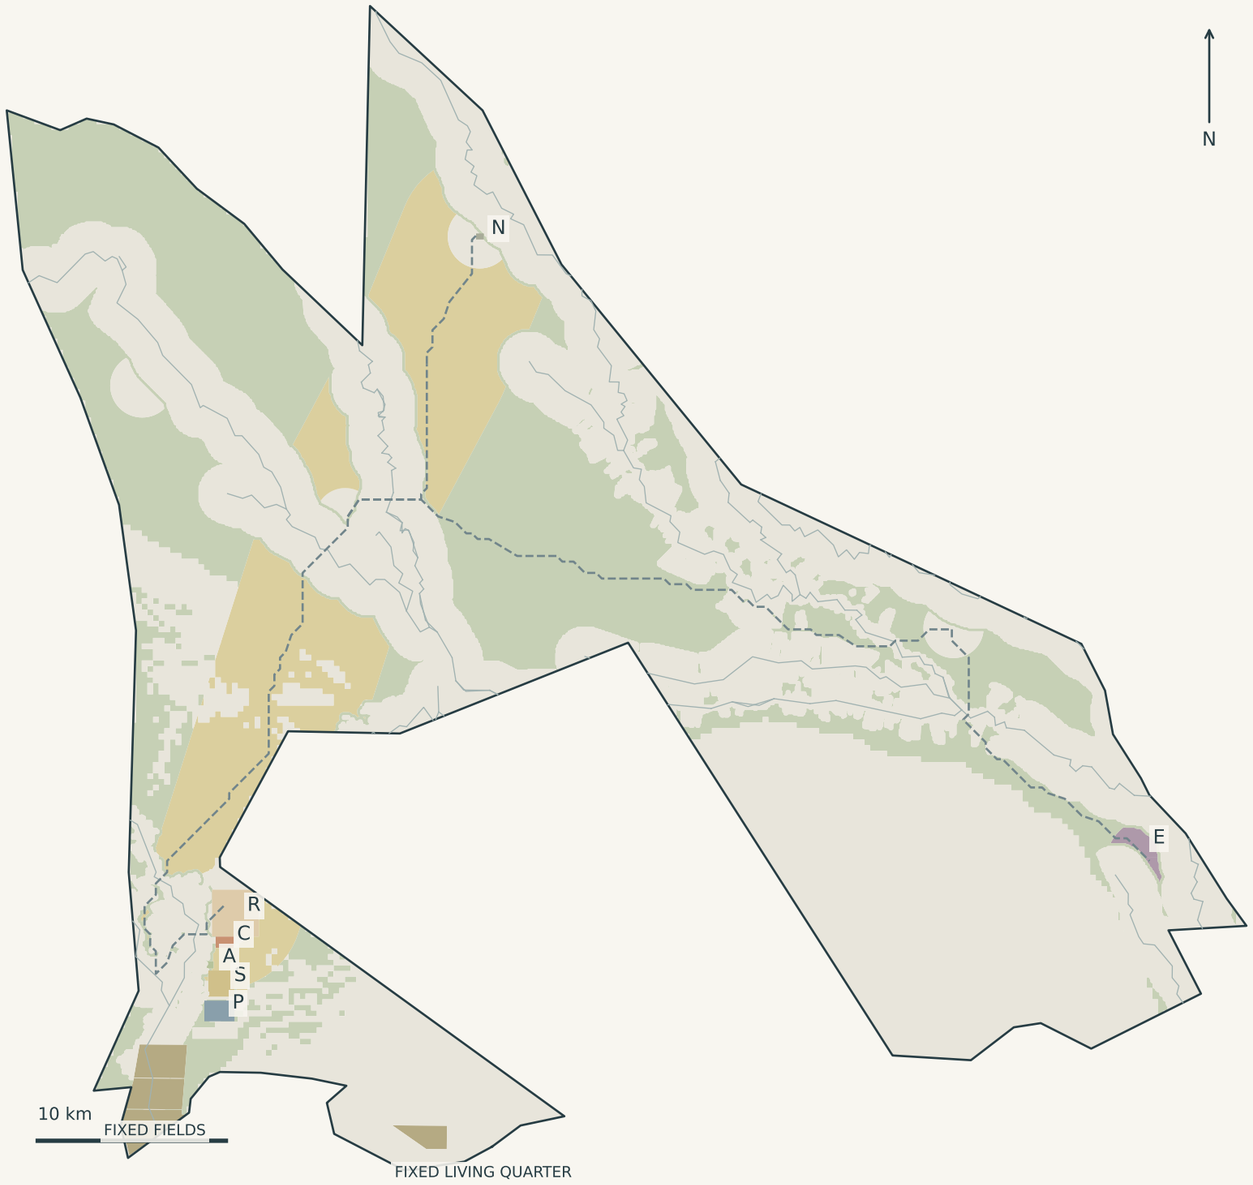

A complete city, built in three stages

10,240 designed dwellings / 25,600 resident scenario at full occupancy. All R/C blocks are assigned a phase and use. These are conditional design capacities, not observed demand.

Production at its own scale

P contains compute, repair and metered utility works. S contains explicit phased PV fields. N is a farm-service hub. E is a gateway workplace with roster beds, not a second residential city.


Territorial land is not all construction

Remaining energy/agriculture roles are options, not installed PV or irrigated fields. No added population is assigned to them. Fixed pilots are unchanged; forage grass and jojoba stay under their arrays.


Full-site map / current geometric area 1,658.82 km2; nominal competition label 1,656 km2 / dashed regional corridors are studies, not secured roads.

City spatial structure / districts, centres and connections

Coordinated diagram from current geometry / local urban enlargement with separate productive inset / not the whole competition boundary.

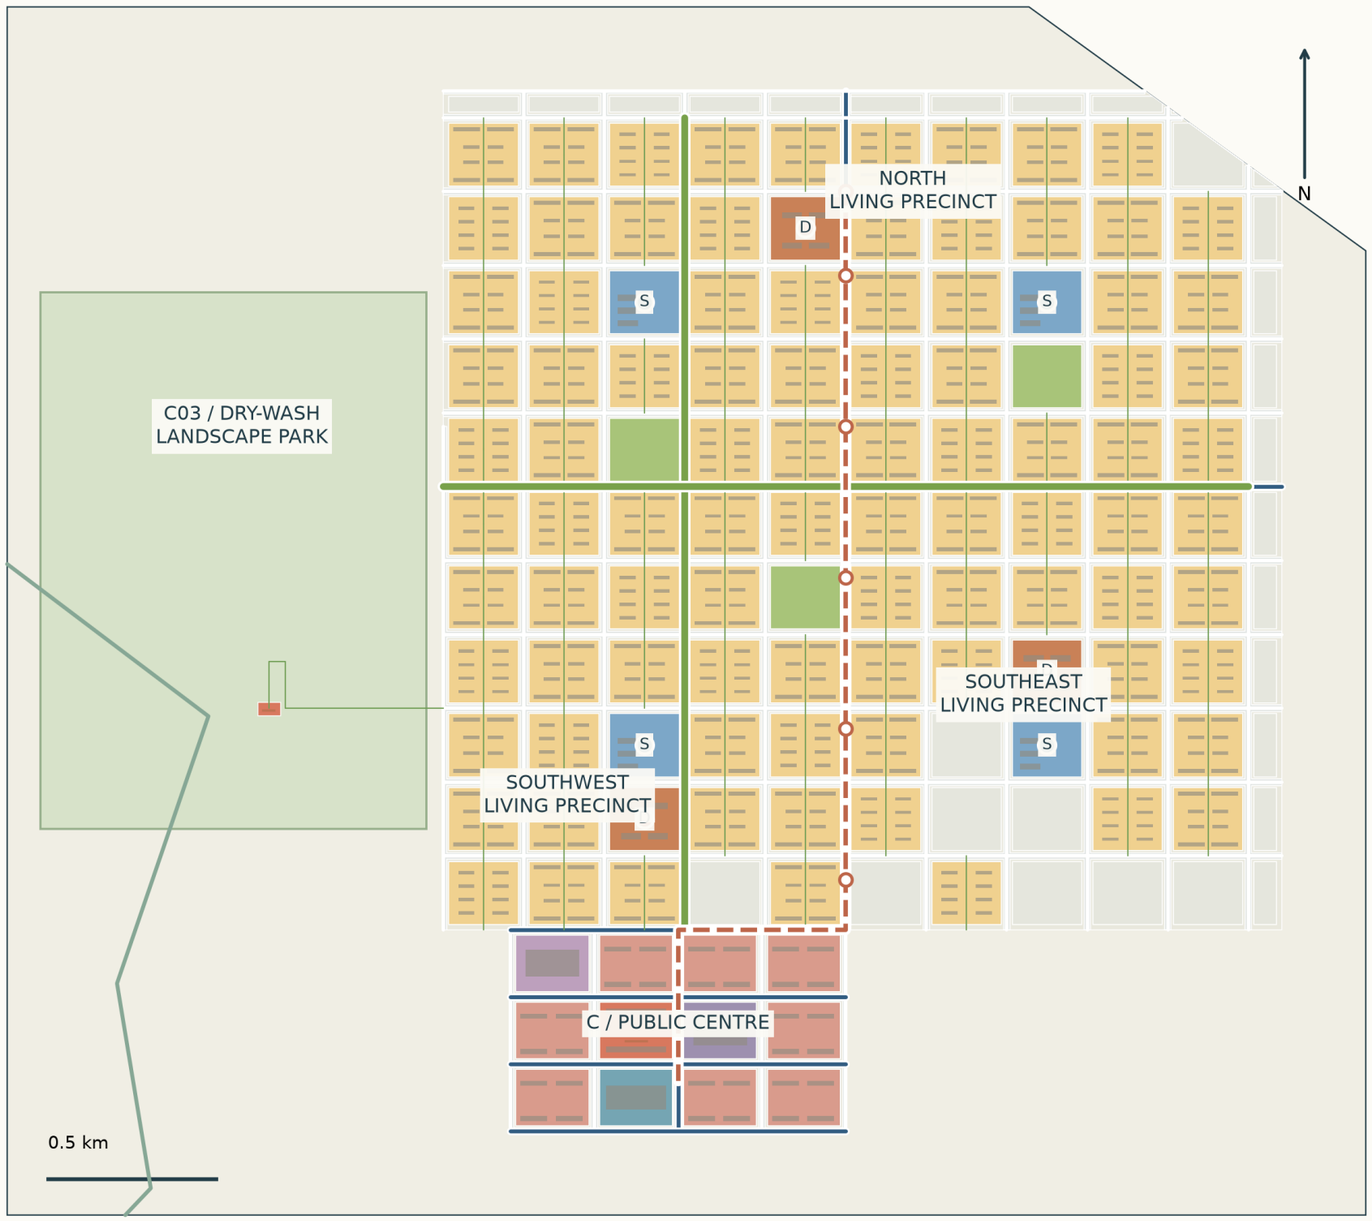

P + S / SEPARATE INSET

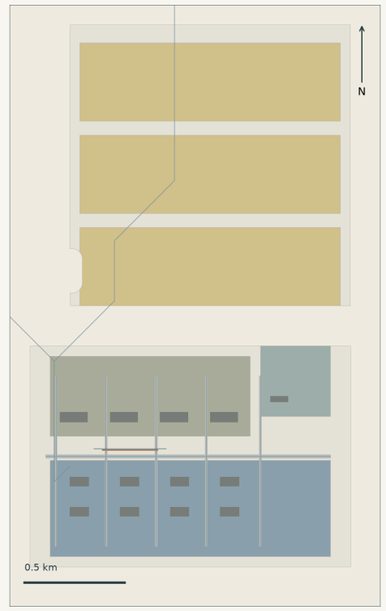



Warm blocks form continuous living precincts. C is the town-level mixed-use centre; blue S anchors are schools and rust D anchors are daily services. Bold blue streets and the rust passenger spine link them. The productive estate remains separate.

Housing
Mixed centre
School
Dry parks
Production
Solar

The city and its independent productive system

Southwestern settlement system / hypothetical full build-out / physical camera extent is not the competition boundary.

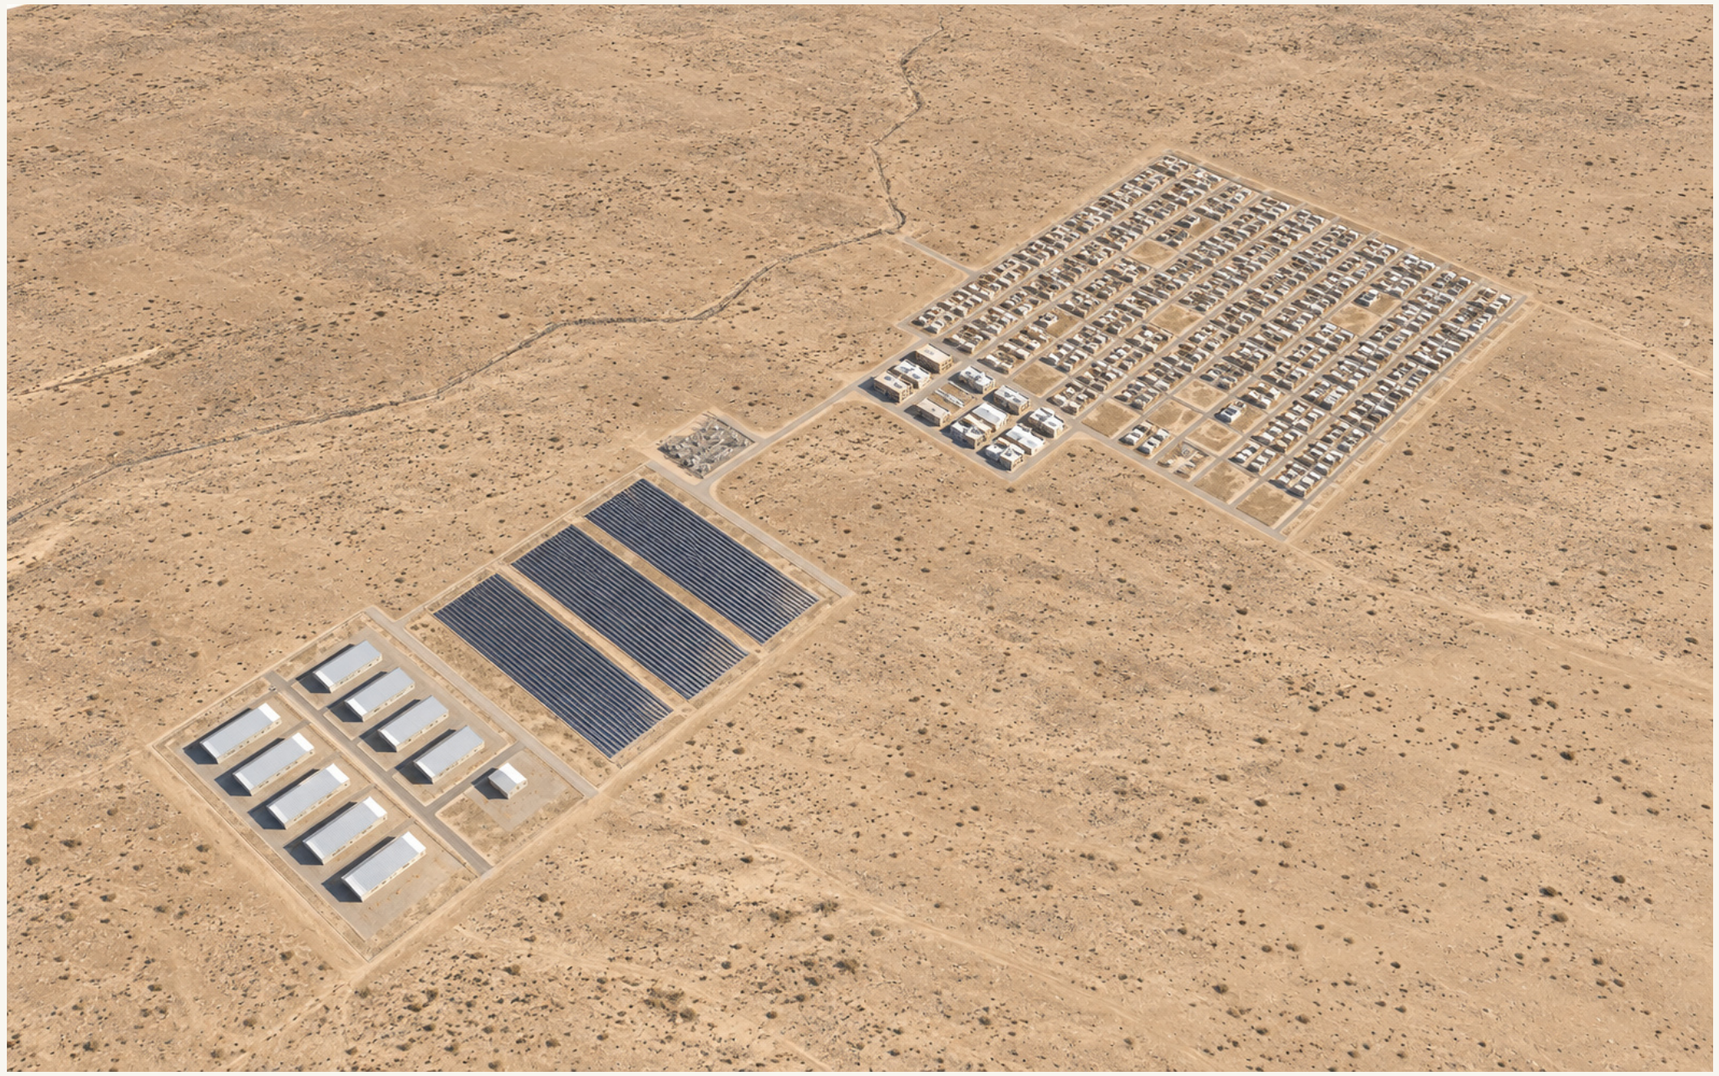

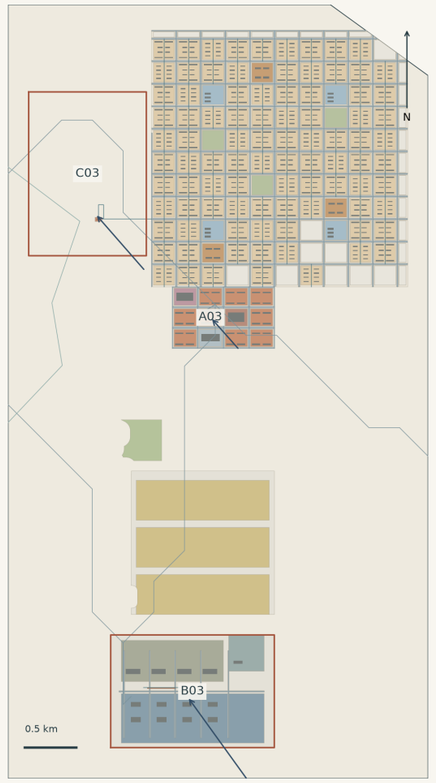


True-distance locator: A03 town commons; B03 productive estate; C03 seasonal wash. The arrows register each aerial camera direction.

The continuous R/C town lies to the northeast; P is a separate compute/repair estate, with three S photovoltaic parcels between. Undeveloped separation is retained. This aerial does not depict the full 1,658.82 km2 territory or the distant N/E workplaces.

01 / Planning structure

One residential district with connected release precincts, a town-level centre and separate production; no repeated micro-city packages.

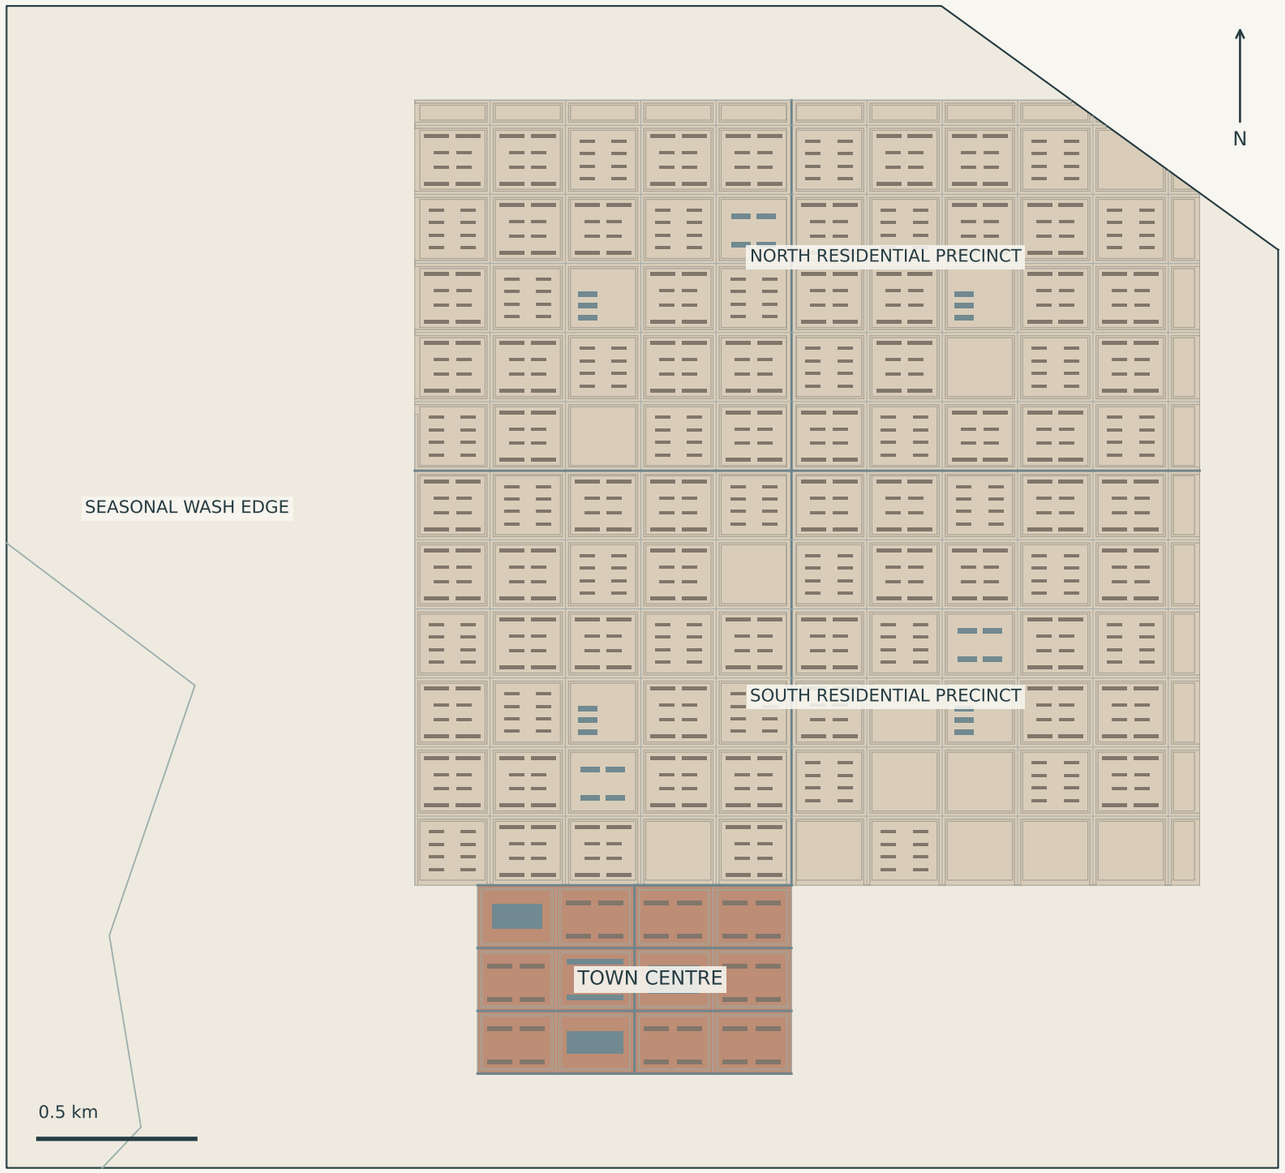


Decision / keep housing continuous

Secondary streets connect the south and north precincts. Services and open-space blocks reinforce the residential fabric. There is no compute campus, logistics yard or institutional barrier inserted between them.

Decision / scale centres by role


Daily centres support their surrounding homes. C serves the wider town. P/N/E serve productive systems with their own access and operating arrangements. More distance by itself earns no design credit.


P + S / separate productive system

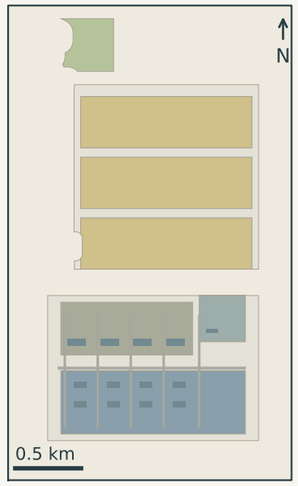

02 / Functional programme and operating links

Functions are relationships between activities; the separate land-use sheet accounts for spatial units and areas.

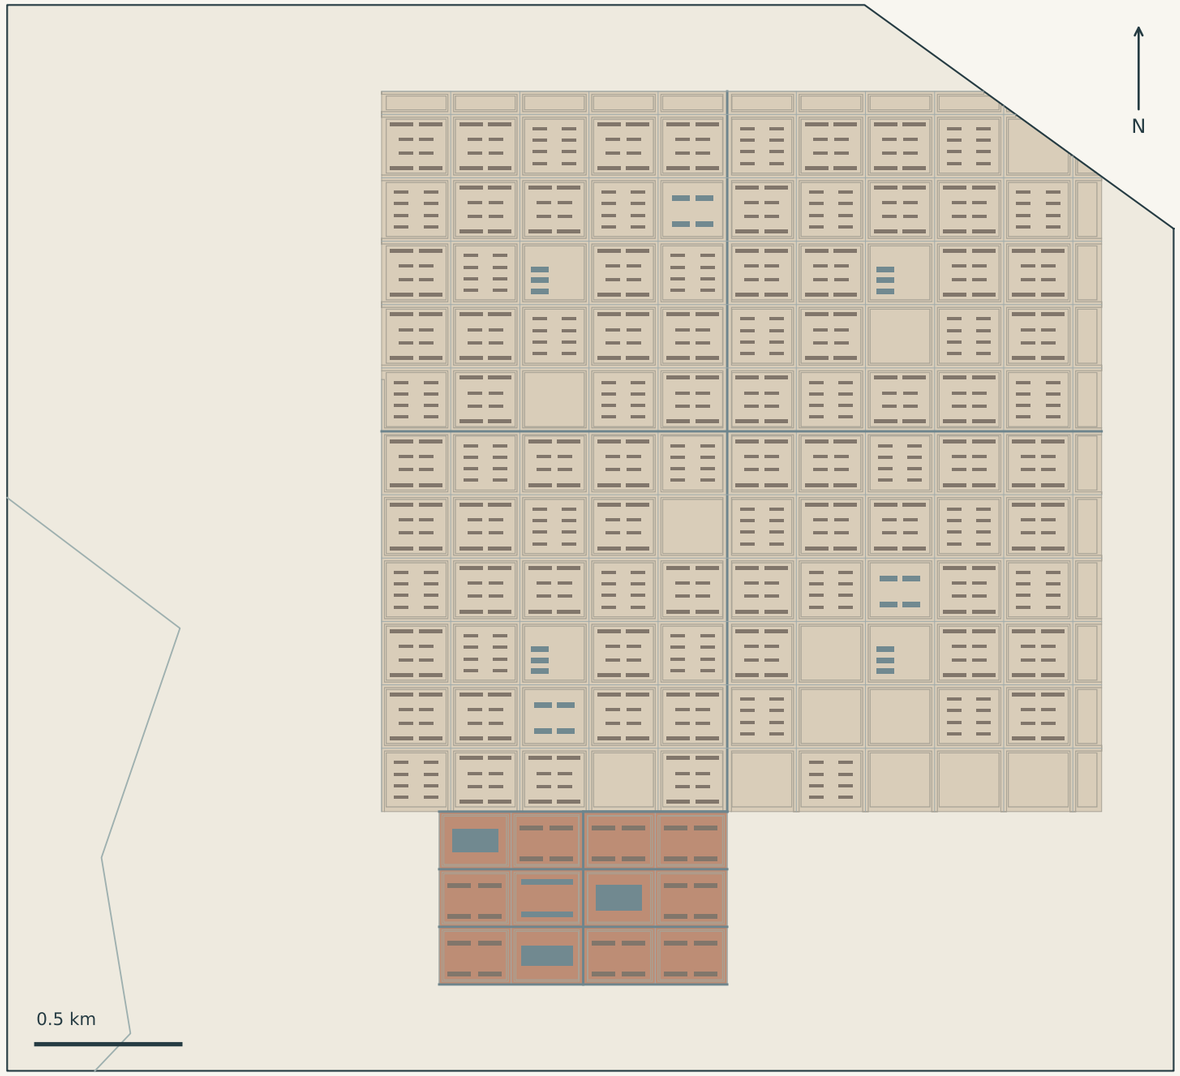


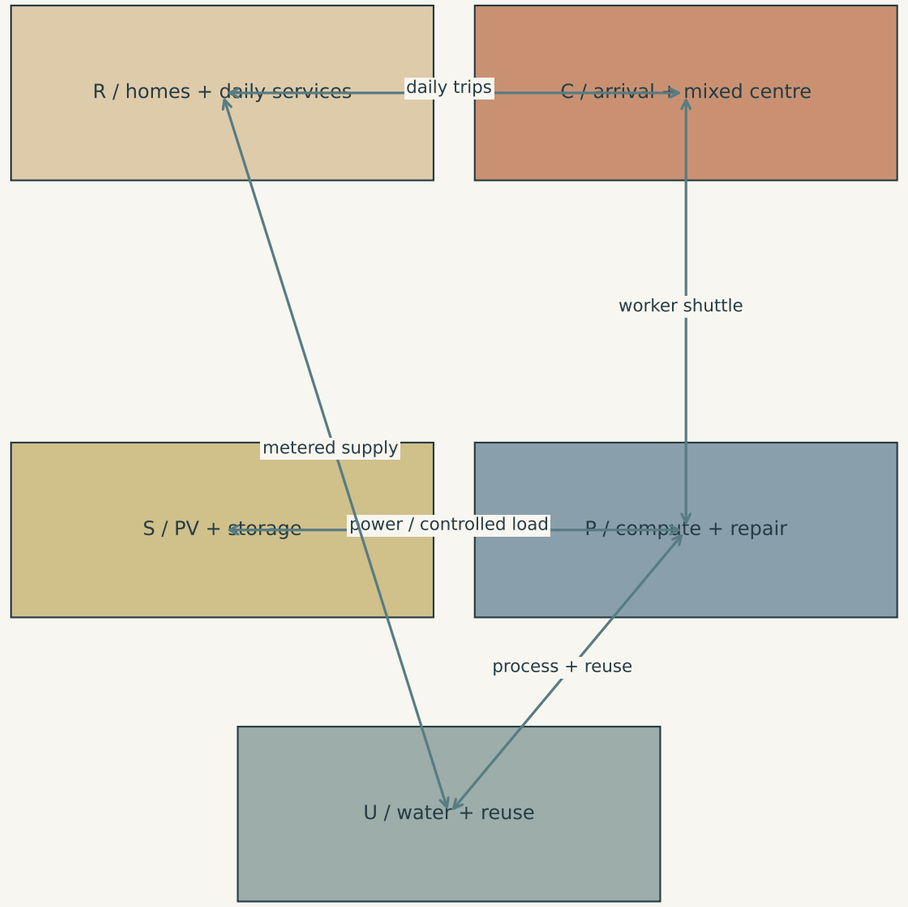


No residential heat pipe is credited. Production heat reuse requires a real nearby receiver and tested ten

Street hierarchy, passenger spine and local access

Coordinated diagram from current geometry / local urban enlargement with separate productive inset / not the whole competition boundary.

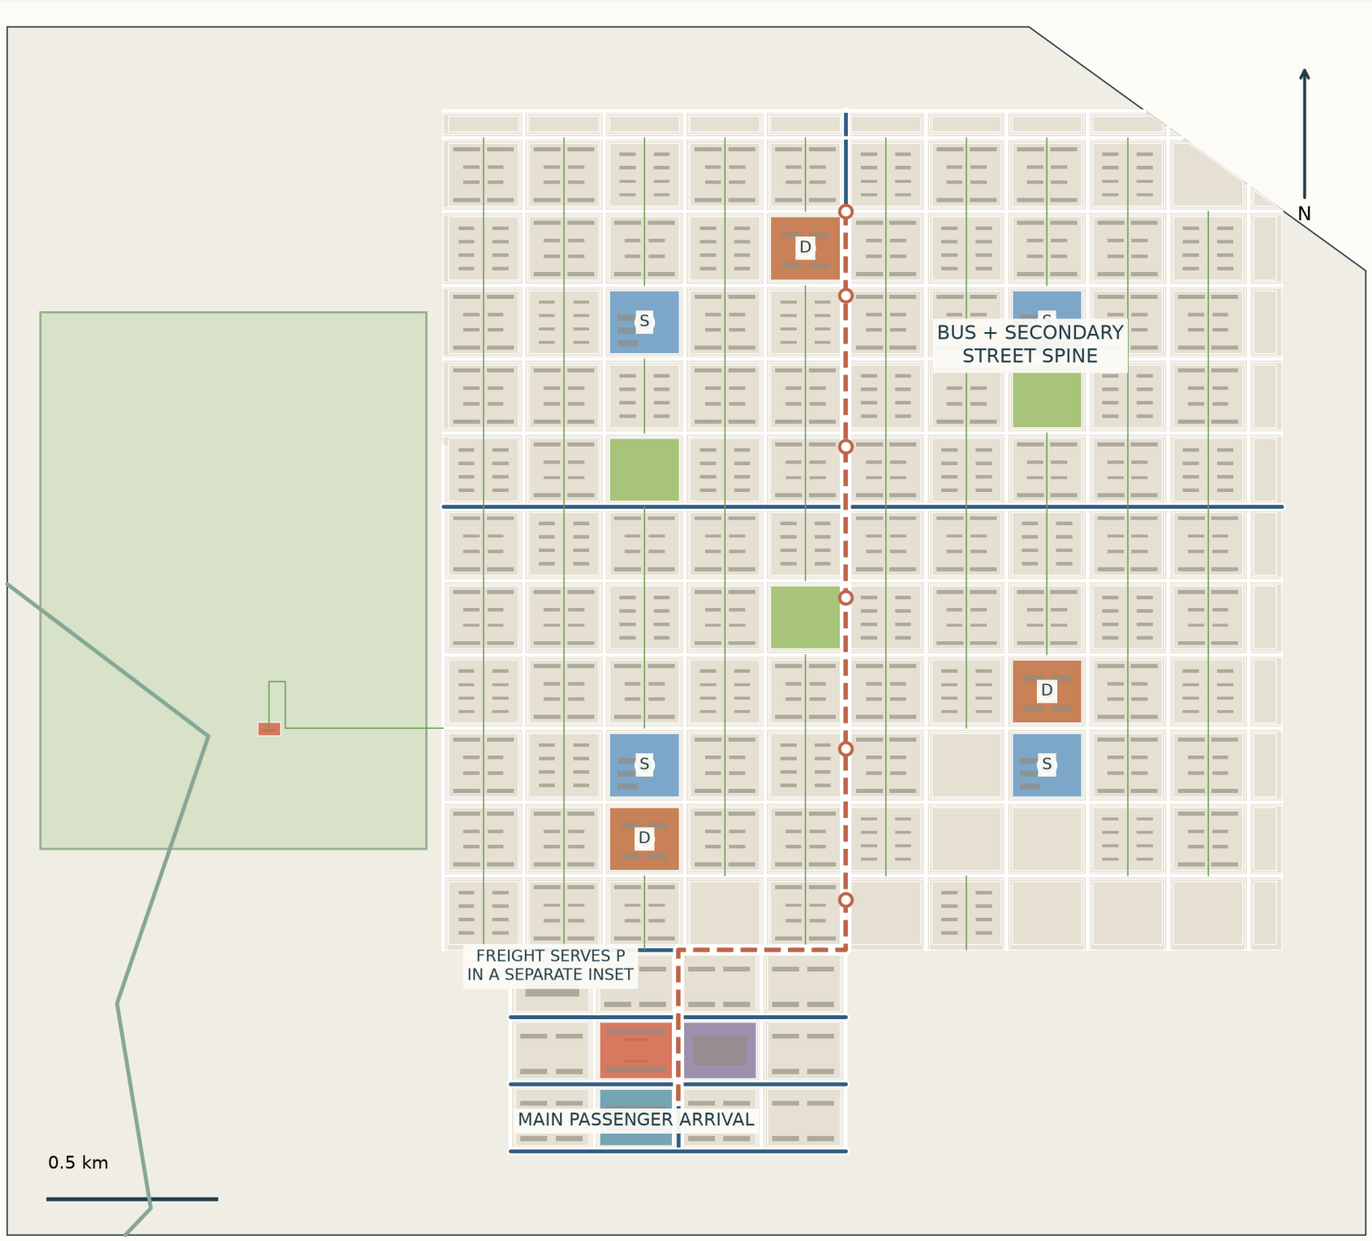

P + S / SEPARATE INSET

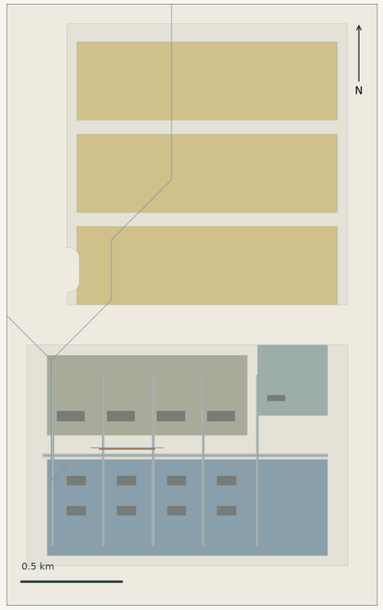


Blue: primary/secondary urban distributors. White: local street mesh. Rust dashed: proposed passenger spine with stops. Freight approaches P through separate study corridors. Rights, junction engineering and yard-spur crossing detail remain to verify.


Housing
Mixed centre
School
Dry parks
Production
Solar

Dry landscape, public parks and proposed shade links

Coordinated diagram from current geometry / local urban enlargement with separate productive inset / not the whole competition boundary.

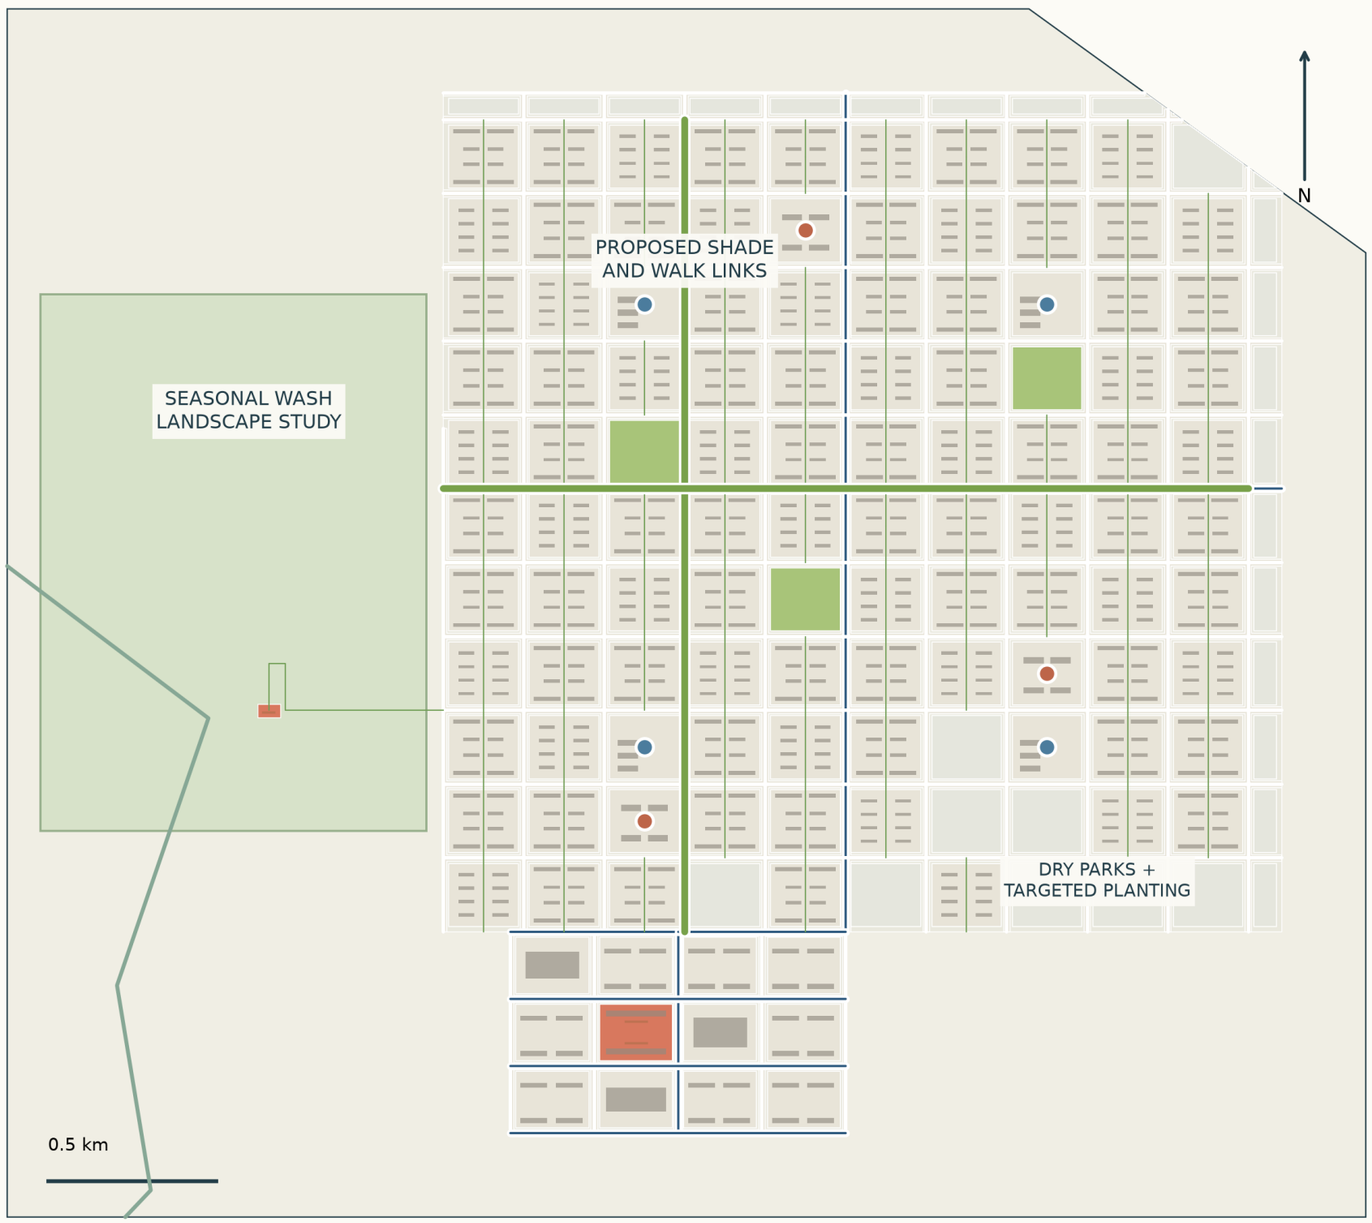

P + S / SEPARATE INSET

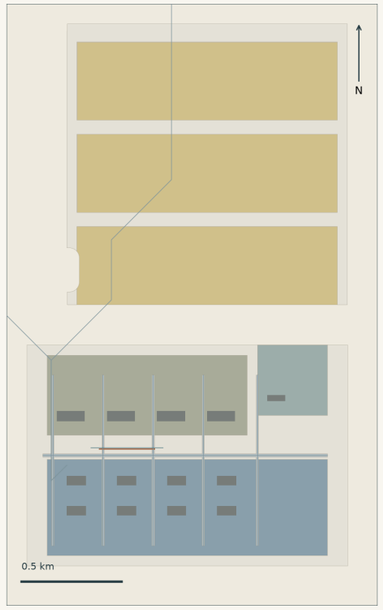


Green parcels are dry parks; the western seasonal wash forms the landscape study. Bold green links are walking and engineered-shade opportunities along existing streets. Targeted low-water planting remains conditional on a verified reuse allocation; no continuous planted forest, lawn or permanent water is assumed.

Housing
Mixed centre
School
Dry parks
Production
Solar

05 / Land-use units and reconciled accounts

Districts, functional activities, net land-use units and construction phases are different accounts, linked by stable IDs.

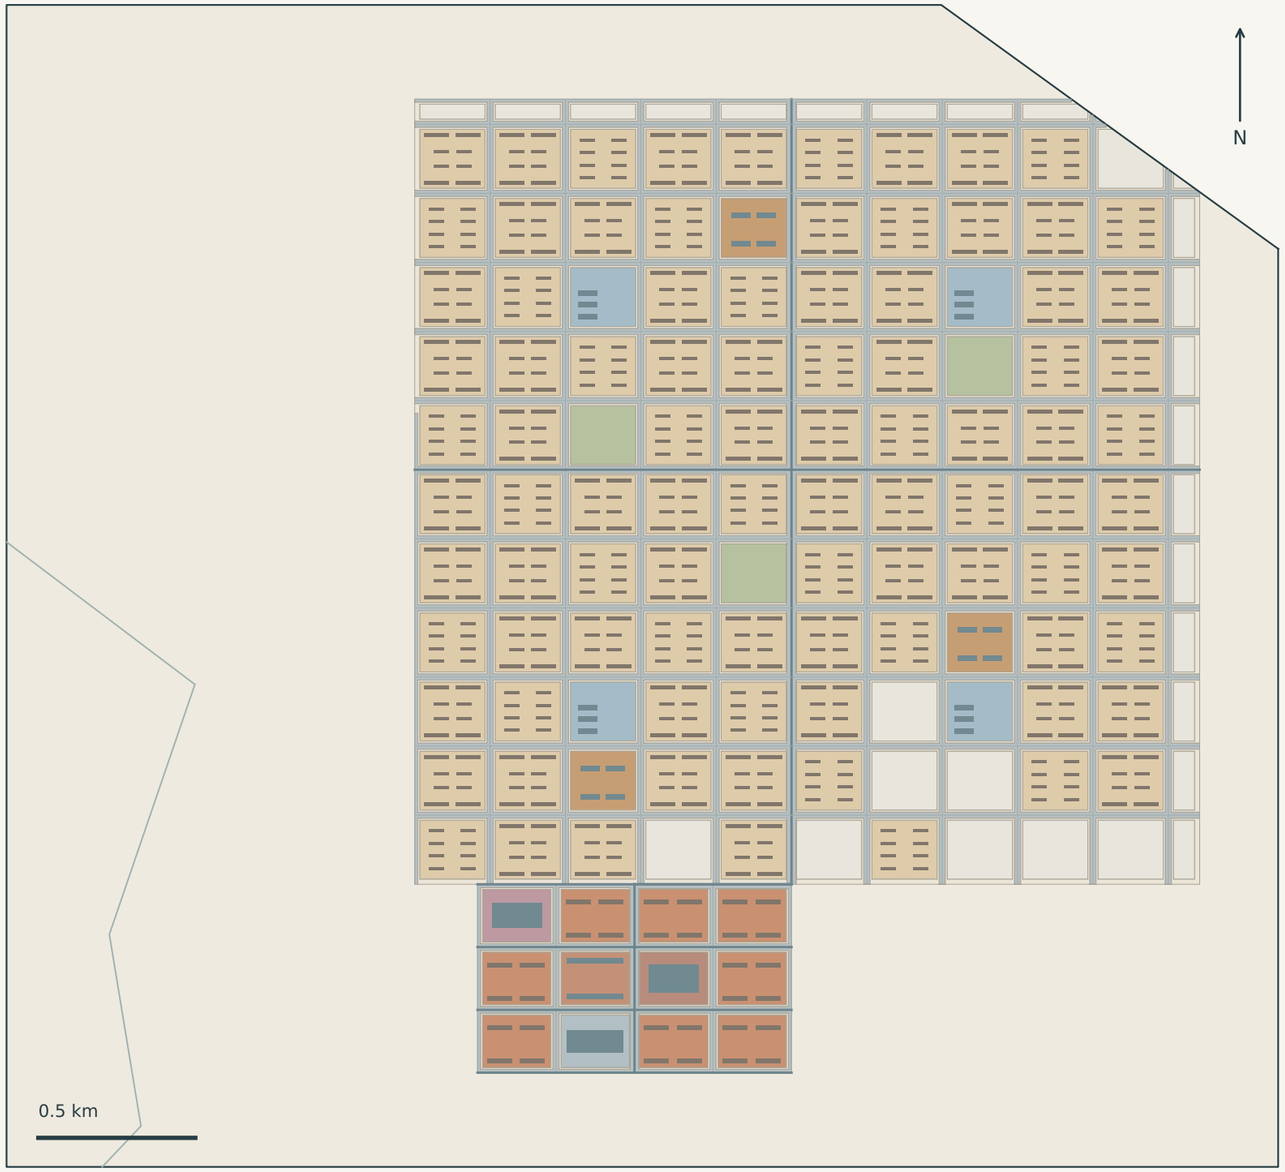

NET LAND / hectares


residential	355.8
operational reserve	346.8
energy	151.9
streets	130.7
dry open space	66.5
compute	64.6
terrain review	56.2
industry	40.6
mixed use	29.3
school	15.6
agriculture	13.4
infrastructure	12.1
civic	12.1
daily centre	11.7

All seven district accounts close without overlap or omission. Open and terrain-review ground has no residential capacity. Floor area is computed from actual submitted footprints x floors.

Housing form is a design scenario: 120 m2 gross residential floor area per dwelling. GFA, dwellings, school provision and phase quantities share the same building IDs.

06 / Public space, education and daily services

Capacity and access are checked together: this is a block-gate network test, not an unverified door-to-door walkability claim.

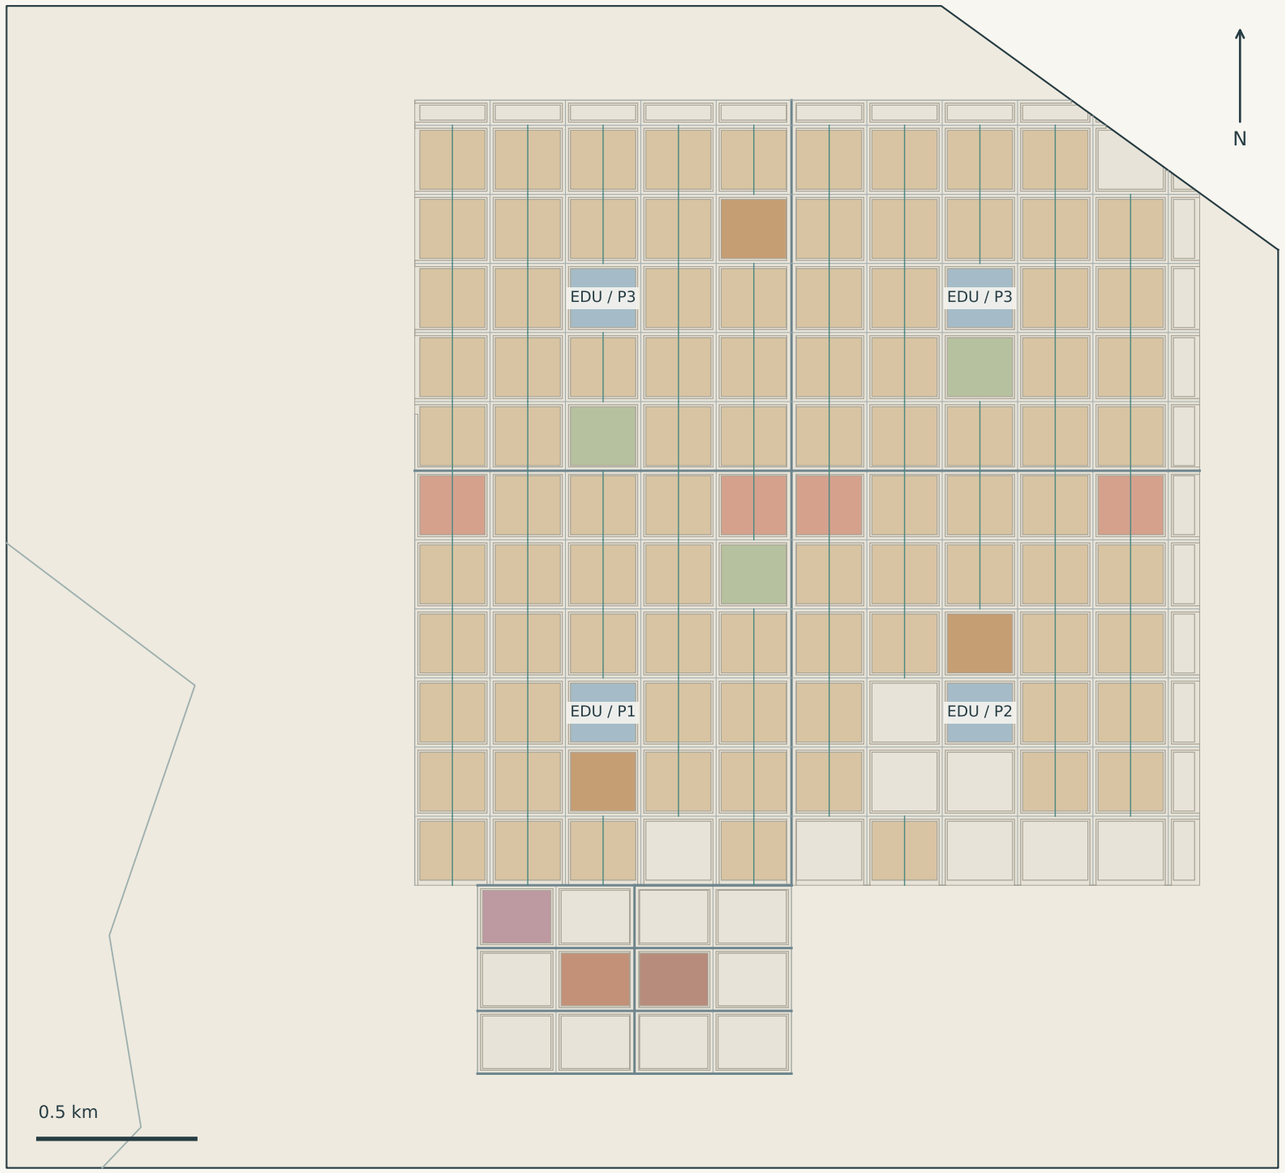


Education grows with housing

Full-city resident scenario 25,600;
education demand at assumed 15% is 3,840.
Designed school capacity is 4,320 places.
The age model and local operating
standards require verification.

Measured street-network coverage


Full-layout median block-gate distance 680 m; maximum 1140 m. 4 blocks exceed the 1,000 m review marker. Those routes need safe crossings and school transport; the marker is not a legal standard.

P + S / separate productive system

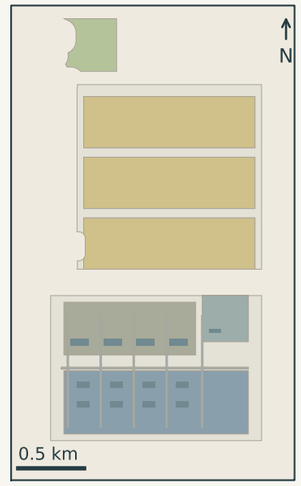

Overall spatial view from the same complete layout


Diagrammatic orthographic axonometric / full build-out / flat analytical datum; building heights x3 for legibility, not terrain or a physical camera.

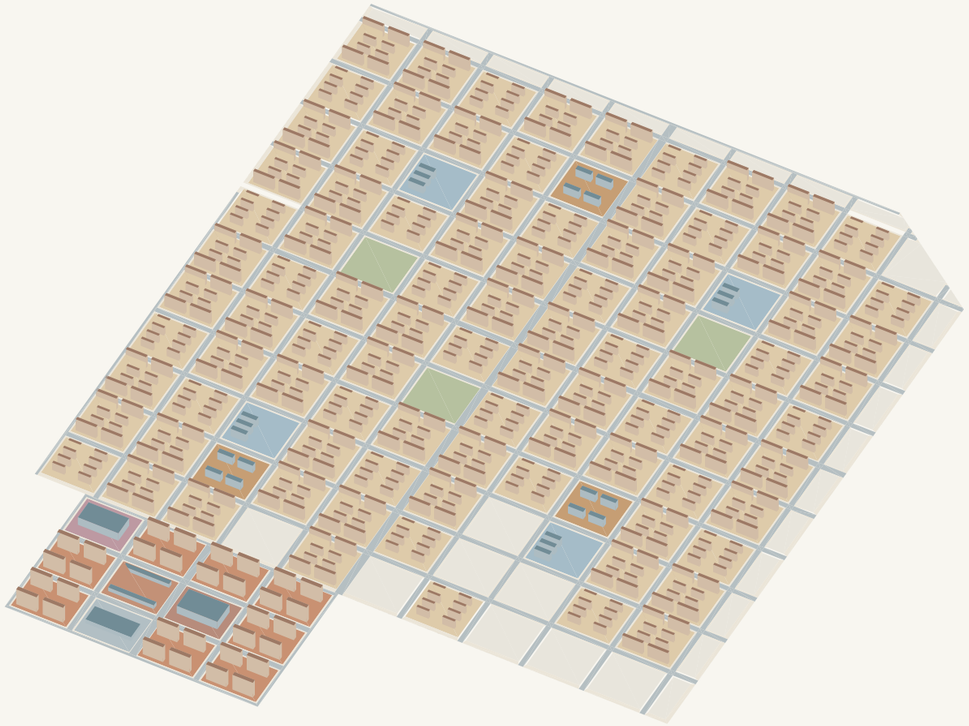

The urban whole is visible

Every drawn housing block, town-centre building and school is taken from the same geometry as the plans and accounts. The main frame covers R and C, not the full competition site.


Separate P + S inset / same orientation

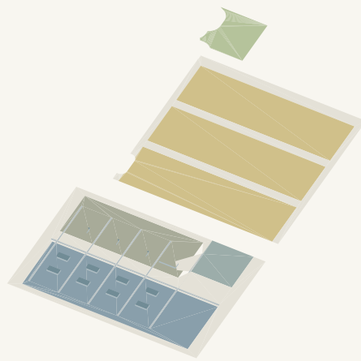

P is not moved beside R to fit this sheet. The full-site locator shows N and E; their workplace plans are accounted separately. No local aerial is presented as the whole territory.

Three places, one shared locator

A03 living/public space / B03 production/infrastructure / C03 urban interface/environment. IDs match plans, images and source geometry.

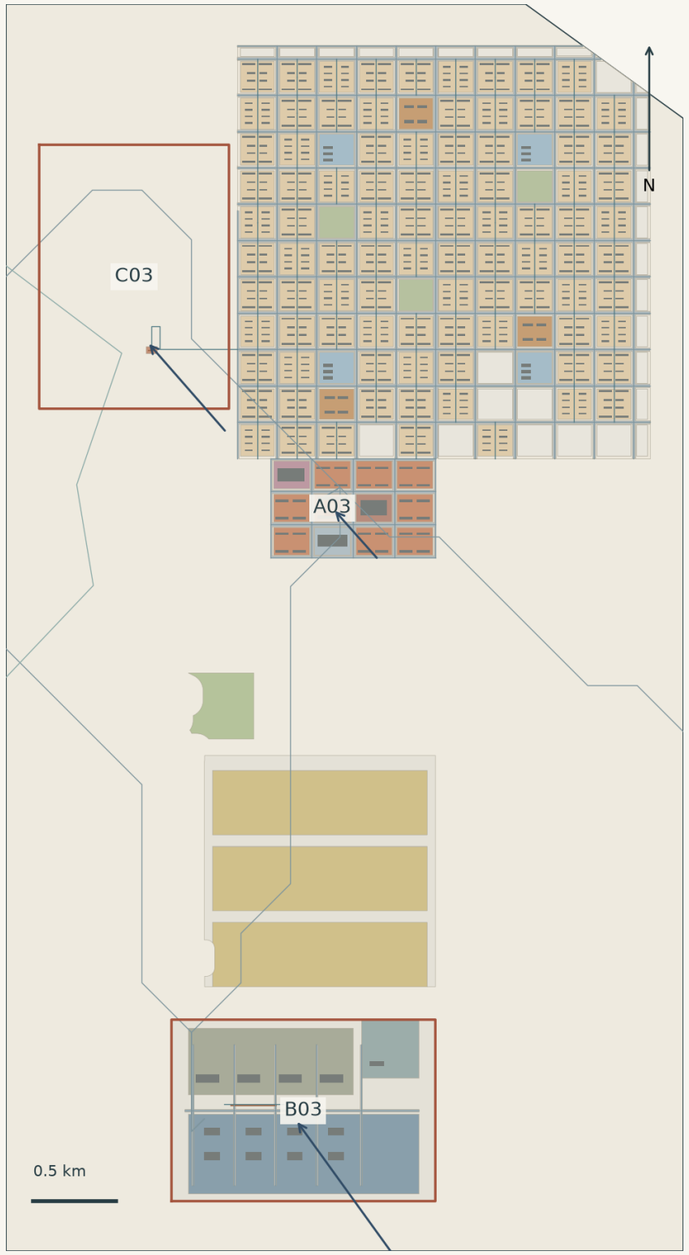

A03 / MARKET COMMONS

Public space in heat and Zonda wind

C town centre / Phase 1

An 80 x 80 m civic commons, two market/refuge halls and two 70 x 6 m shade bands. Daily services are reached through the town street network. The view is a node crop, not a whole-city render.

B03 / PRODUCTIVE PRECINCT

A compute campus and its waste heat

P independent estate / Phase 1-3

Eight separate staged compute halls and four repair workshops use their own machine/service spine. A 280 m worker shade route parallels the service spine; controlled yard-spur crossings require detailed design. No residential heat pipe is credited.

C03 / SEASONAL WASH EDGE

A seasonal river park

Western channel edge / Phase 2

A removable 40 x 6 m shade point and an edge path link back to the residential street. The illustrated visitor edge is a local crop of the larger park study. The dry wash is not an ornamental waterbody.

A03 / Market commons and climate refuge

Public space in heat and Zonda wind / C centre / Phase 1 / local aerial



AI-finished concept image from the registered geometry-derived aerial control. Materials and life illustrate design; they are not evidence.


A03 / use, access and spatial detail

Public space in heat and Zonda wind / C centre / Phase 1 / eye-level camera E and aerial camera A are marked on the plan.



FINISHED EYE-LEVEL CONCEPT VIEW

Morning market setup; daytime visits and refuge; evening social use. Staff open the indoor refuge and manage events. Shade is provided by roofs, not an assumed irrigated canopy.

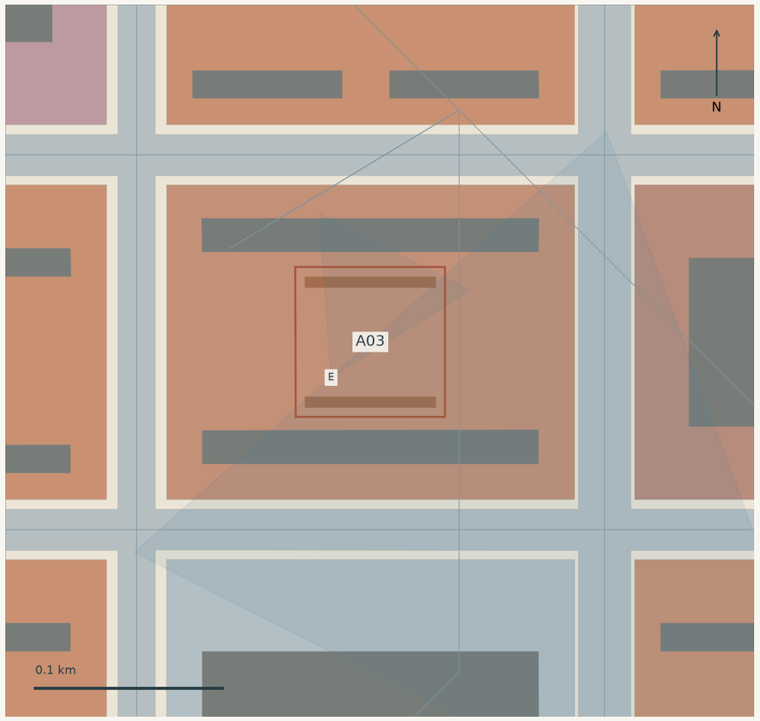

PLAN / CAMERA DIRECTIONS



Diagrammatic section / low market halls and open shade / not a surveyed level

Plan is authoritative for position and dimensions. Section is explanatory. People, surface textures and detailed finishes are illustrative.

B03 / Compute and repair precinct

A compute campus and its waste heat / P productive estate / phased 2-4-8 MW scenario / local aerial




AI-finished concept image from the registered geometry-derived aerial control. Materials and life illustrate design; they are not evidence.

B03 / use, access and spatial detail

A compute campus and its waste heat / P productive estate / phased 2-4-8 MW scenario / eye-level camera E and aerial camera A are marked on the plan.




FINISHED EYE-LEVEL CONCEPT VIEW

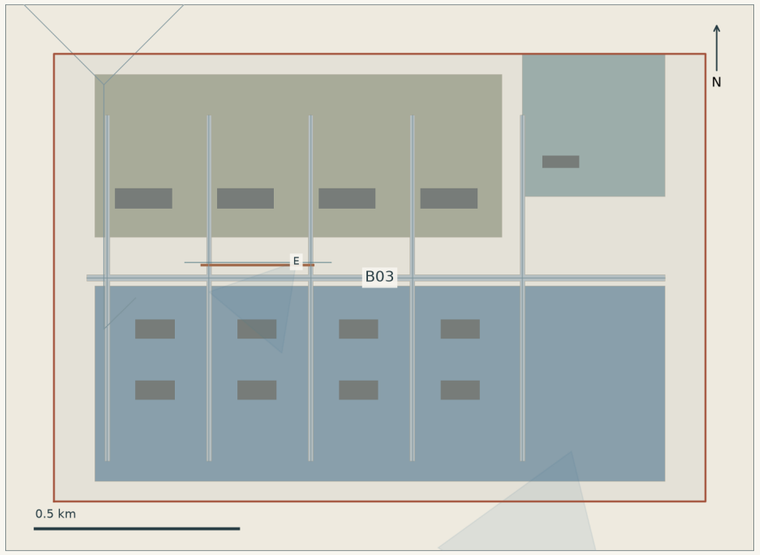

PLAN / CAMERA DIRECTIONS

The worker path runs parallel to the service spine; controlled yard-spur crossings still require detailed design. Freight remains on the machine network. Curtailable IT follows the energy account; dry cooling and metering precede expansion. No unverified residential heat benefit is claimed.




Diagrammatic hall sequence / footprints and single-storey heights retained

Plan is authoritative for position and dimensions. Section is explanatory. People, surface textures and detailed finishes are illustrative.

C03 / Seasonal wash visitor edge

A seasonal river park / Western seasonal channel / Phase 2 / local aerial

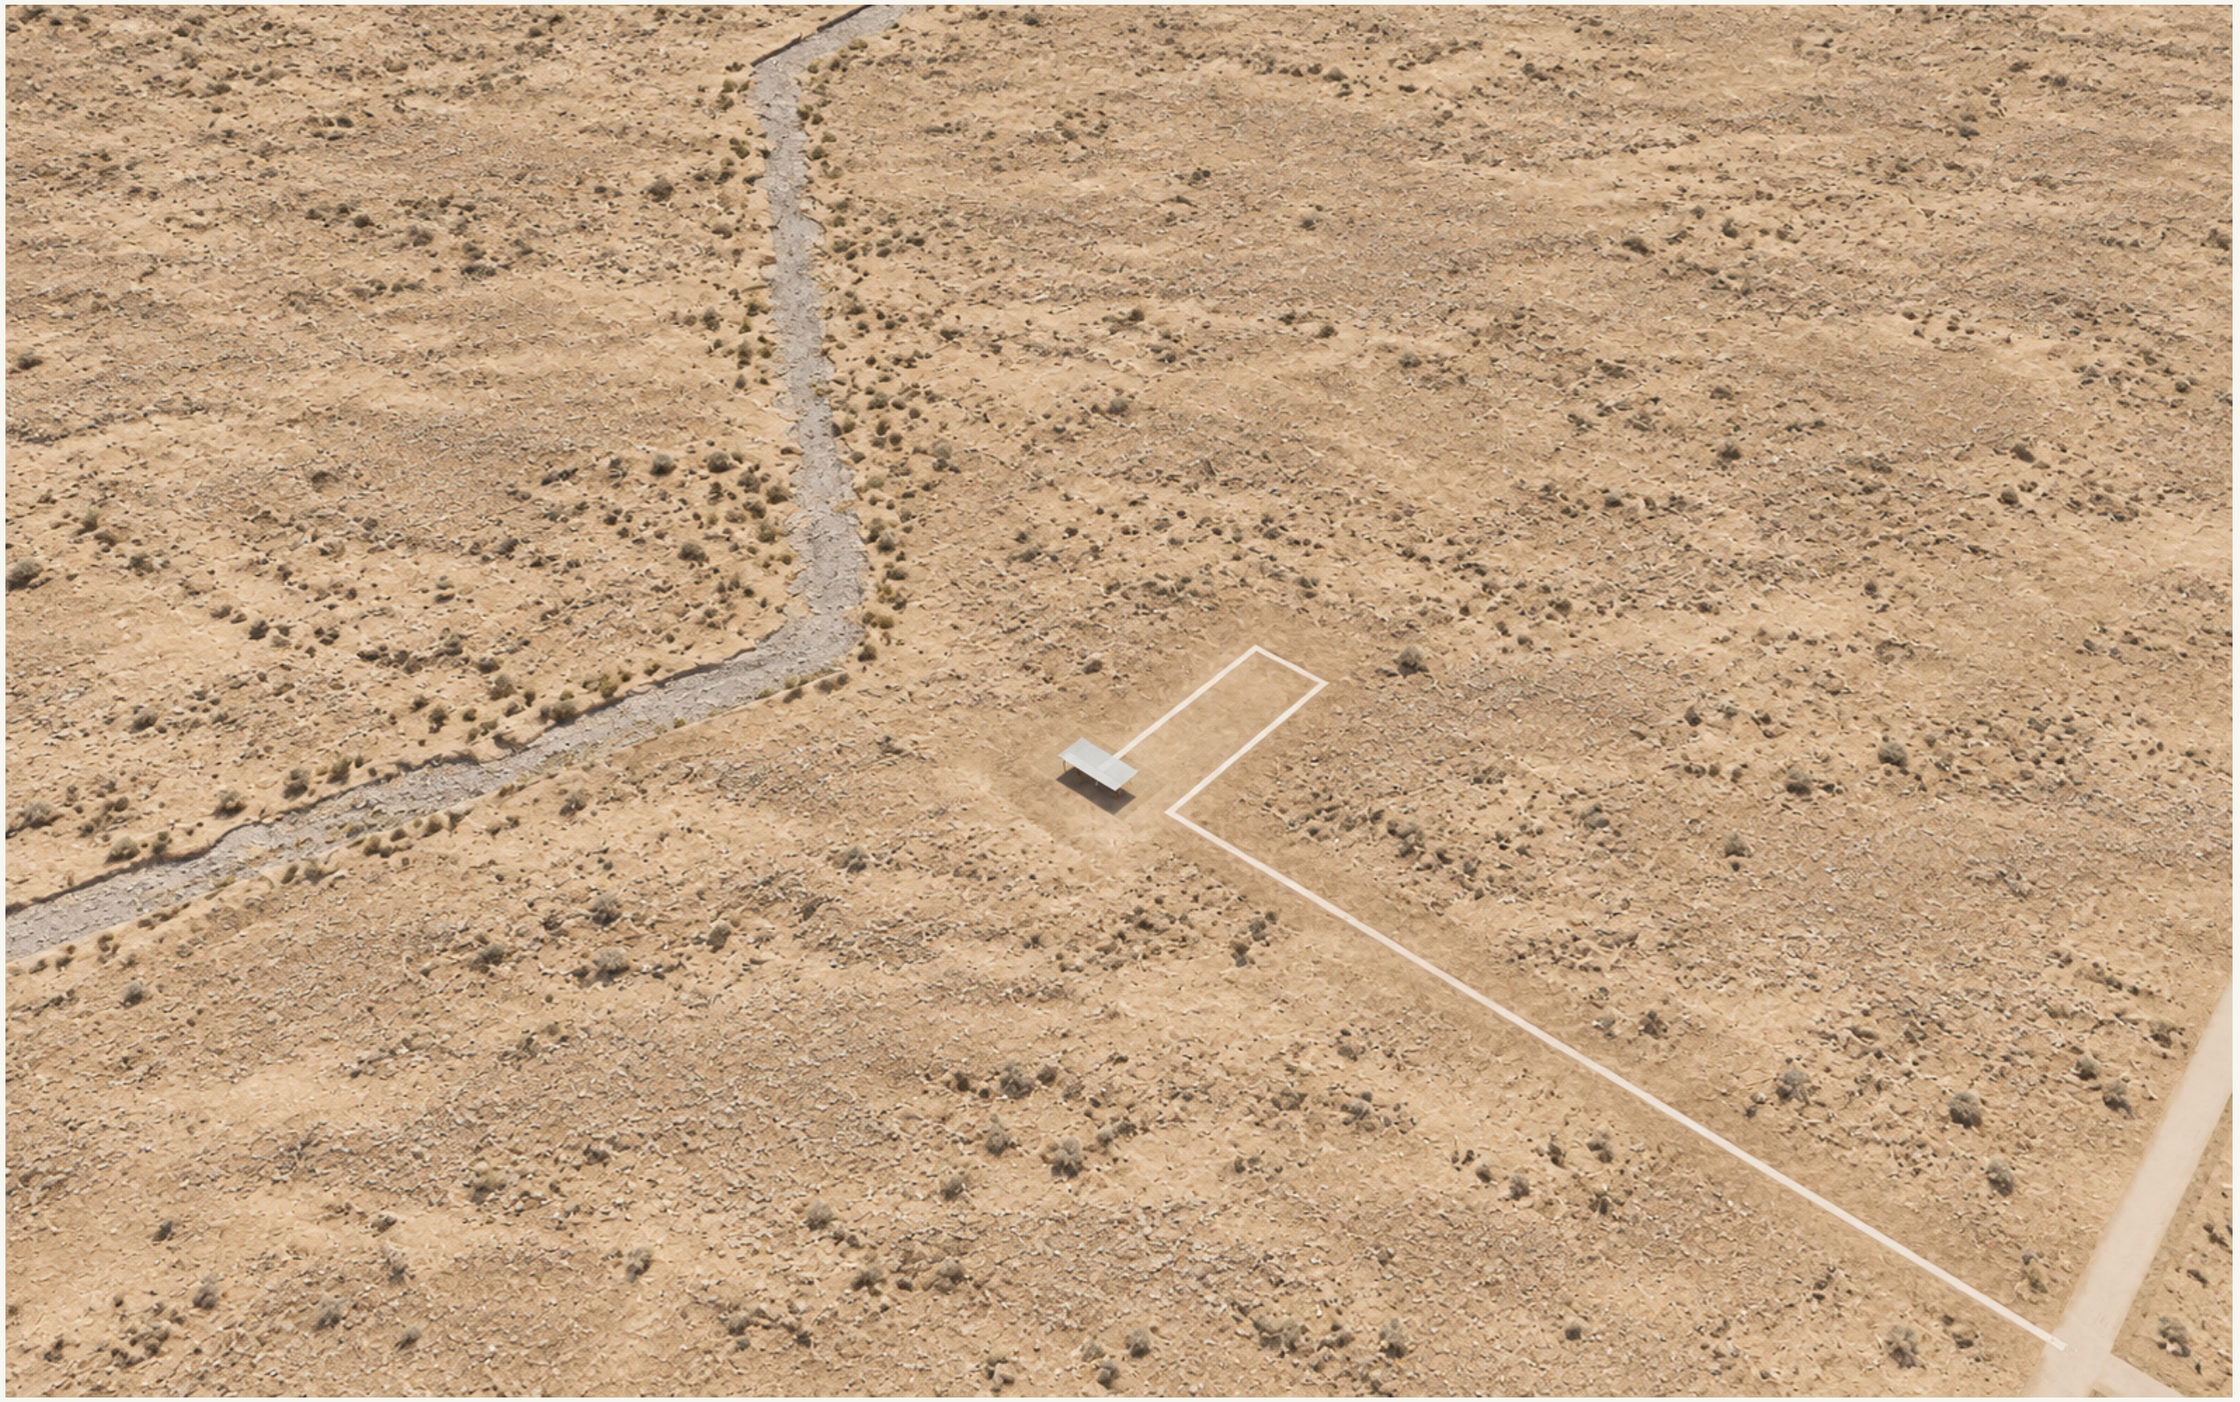

AI-finished concept image from the registered geometry-derived aerial control. Materials and life illustrate design; they are not evidence.

C03 / use, access and spatial detail


A seasonal river park / Western seasonal channel / Phase 2 / eye-level camera E and aerial camera A are marked on the plan.



FINISHED EYE-LEVEL CONCEPT VIEW

Dry-season walking and observation use the eastern edge. The path and shade point are removable. Access closes on warnings; no occupied building or dam is placed on the source channel. Surveys and hydraulic design must set safe levels.

C03

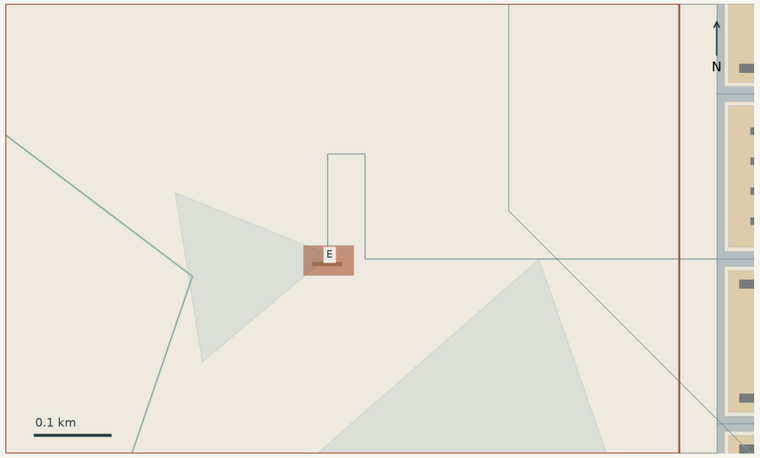

PLAN / CAMERA DIRECTIONS




Illustrative dry-wash section / no asserted flood levels or permanent water


Plan is authoritative for position and dimensions. Section is explanatory. People, surface textures and detailed finishes are illustrative.

Three construction phases with matching capacity accounts

Every proposed development zone appears in the same geometry-linked programme; timing is conditional, not an approved calendar.

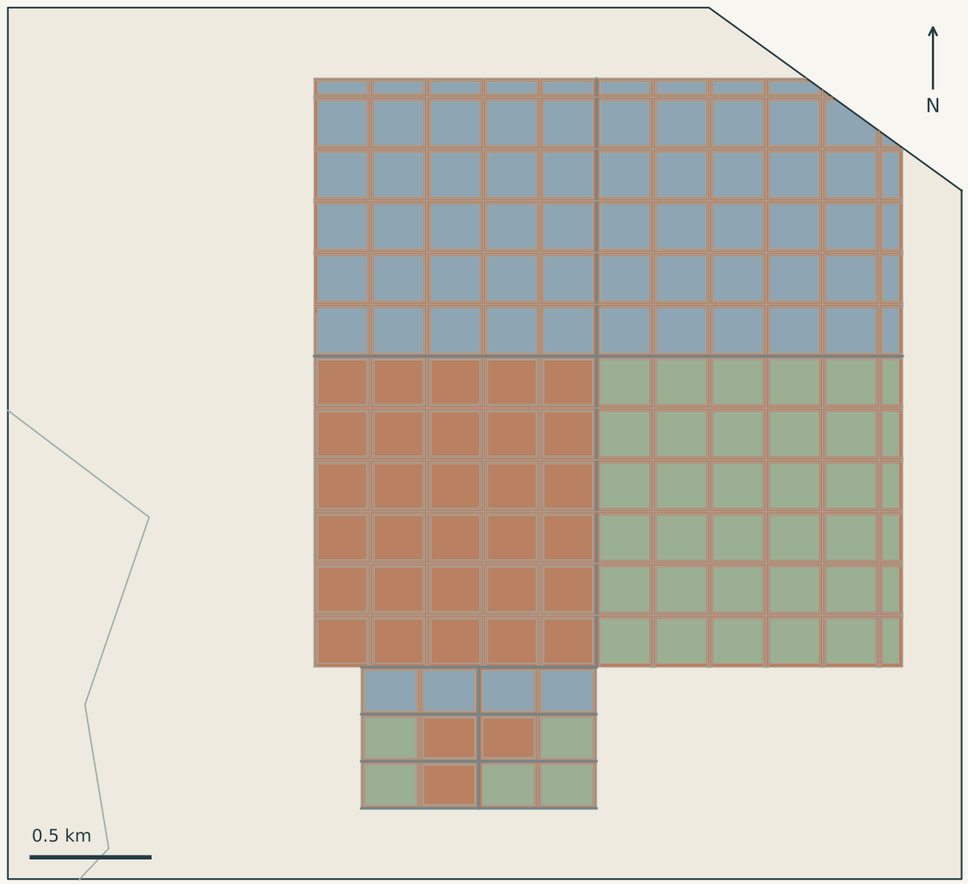

Separate productive phases

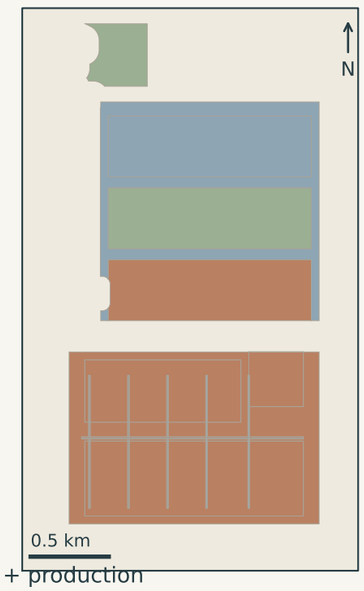

P1: core life + production
P2: connected district expansion
P3: northern fabric + gateway

N and E have their own service, transport and utility conditions.

Phase	New people	Total people	New homes	Total homes	New jobs	Total jobs
1	7,040	7,040	2,816	2,816	783	783
2	6,440	13,480	2,576	5,392	1,866	2,649
3	12,120	25,600	4,848	10,240	1,812	4,461

Every developed zone has a phased account

New / cumulative design capacities; scenario timing and observable triggers govern actual release. Roster beds are not resident households.

Zone / phase	Residents new / total	Homes new / total	Jobs new / total	Works / provision
R / P1	7,040 / 7,040	2,816 / 2,816	222 / 222	Housing + daily care, schools, dry parks and local streets
C / P1	0 / 0	0 / 0	432 / 432	Arrival, market/refuge, primary care and mixed-use centre
P / P1	0 / 0	0 / 0	129 / 129	Staged compute halls, repair, covered water/reuse works
S / P1	0 / 0	0 / 0	0 / 0	Explicit phased PV parcels; essential loads protected
R / P2	5,440 / 12,480	2,176 / 4,992	222 / 444	Housing + daily care, schools, dry parks and local streets
C / P2	1,000 / 1,000	400 / 400	1,400 / 1,832	Arrival, market/refuge, primary care and mixed-use centre
P / P2	0 / 0	0 / 0	102 / 231	Staged compute halls, repair, covered water/reuse works
S / P2	0 / 0	0 / 0	0 / 0	Explicit phased PV parcels; essential loads protected
A / P2	0 / 0	0 / 0	0 / 0	13.4 ha metered irrigation trial, subject to source headroom
N / P2	0 / 0	0 / 0	142 / 142	Northern maintenance, cooperative and day services
R / P3	11,520 / 24,000	4,608 / 9,600	300 / 744	Housing + daily care, schools, dry parks and local streets
C / P3	600 / 1,600	240 / 640	968 / 2,800	Arrival, market/refuge, primary care and mixed-use centre
P / P3	0 / 0	0 / 0	204 / 435	Staged compute halls, repair, covered water/reuse works
S / P3	0 / 0	0 / 0	0 / 0	Explicit phased PV parcels; essential loads protected
E / P3	0 / 0	0 / 0	340 / 340	Gateway workshops, trade services and 320 roster beds

Sequence: access rights and utility supply precede occupancy. School/health/market operators and livelihood demand precede housing release. Gateway rights and worker welfare precede E. Full numeric programme and assumptions remain in the technical records.

Resources, livelihoods and independent first operation

Demand is computed before claiming supply. Missing rights and fixed-pilot demand are not treated as zero.

Phase 1 / a measured demand scenario

7,040 residents; 783 design job capacity. Fresh source requirement for the NEW programme: 409,590 m3/year. Existing fixed pilots/quarter remain additional and unverified.

Synthetic hourly dispatch

16 MWp PV / 40 MWh battery / 2 MW peak IT. Fully matched hours: 82.52%; achieved IT utilisation: 70.4%. Unmatched grid imports are not credited carbon-free. No power export is assumed.

First works and independent operation

Regional access and corridor rights; verified source/yield/quality; covered storage and reuse; power/fibre and protected essential loads; school/health/market operators; wastewater/waste and emergency response. Housing occupancy waits for these, even if later stages stop.

A 30% water shortage changes use

Protect drinking water, care, wastewater and essential safety. Curtail new irrigation trials and discretionary cleaning, then interruptible production/IT. Existing pilot obligations need operator agreement; their water is not silently confiscated.

Livelihood and demand are real gates

Employment totals are design capacity, not signed jobs. The workforce/income mix and the demand for occupied homes require an evidenced case. Release housing in funded tranches rather than constructing the entire capacity scenario at once.

Checks and remaining verification

815 buildings; 91 housing blocks. Land accounts close and encoded building/road overlaps are checked. These checks do not establish water rights, school operation, highway access, seismic design, noise performance or image approval.

Capacities, resource gates and the declared trade-off

All values below are computed geometry or declared scenarios. No water right, installed power, signed employment or approval is implied.

Indicator / basis	Phase 1	Phase 2	Phase 3
Residents / 2.5 per dwelling	7,040	13,480	25,600
Dwellings / geometry	2,816	5,392	10,240
Job-space capacity / scenario	783	2,649	4,461
Education places / scenario	1,080	2,160	4,320
Fresh requirement / new programme m3/year	409,590	794,174	1,499,976
Peak IT capacity / MW	2	4	8
PV scenario / MWp	16	33	53

What the scheme gives up
Maximum uninterrupted computing throughput and the shortest possible productive route. Housing continuity, independent public life and an honest service boundary take priority. The consequence is a separate worker shuttle and controlled curtailment; operators bear the interruption cost.

What must be verified before construction
Combined existing/new water balance; terrain and channel surveys; access and power rights; funded schools, health and utilities; household livelihood/demand; noise, dust, seismic and civil design. Current images cannot establish any of these.