AGUA FINITA | The Finite Water City

Whole-territory aerial concept / solar agriculture, productive work and compact settlements




V14 cover revision / conditional long-term proposal, not installed capacity. Source plans govern geometry and dimensions.

AI-finished concept from own spatial control / 27 October 2026 / public working preview

An energy landscape with connected centres

Full issued boundary. Strategic zones are proposed allocations, not installed works.

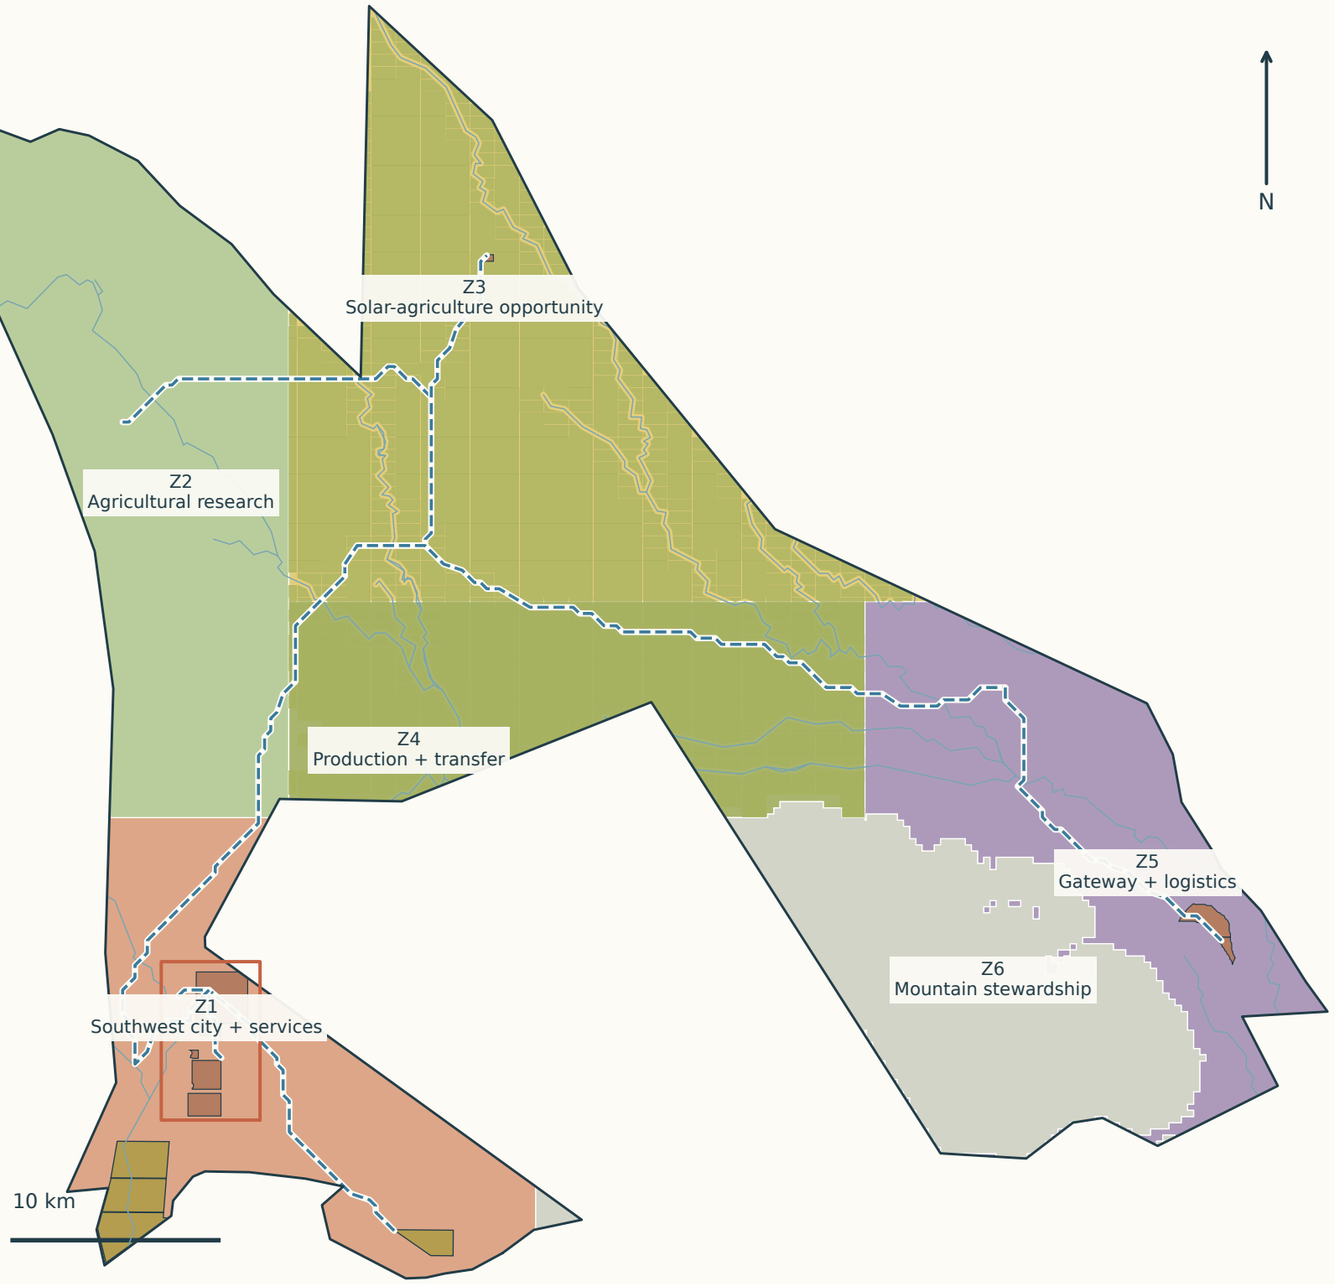

Z1 Southwest city + services

Z2 Agricultural research

Z3 Solar-agriculture opportunity

Z4 Production + transfer

Z5 Gateway + logistics

Z6 Mountain stewardship


Source channels remain visible.
Fields stop at screened constraints.
Fixed pilot interiors are retained.

Dashed blue: proposed regional corridors.
Red frame: southwest enlargement below.

Z1 living and public services support production; they do not replace the solar-agriculture territorial programme.

Living, public life and production use different ground

Canonical V12 geometry / street hierarchy, actual footprints and protected pilot context

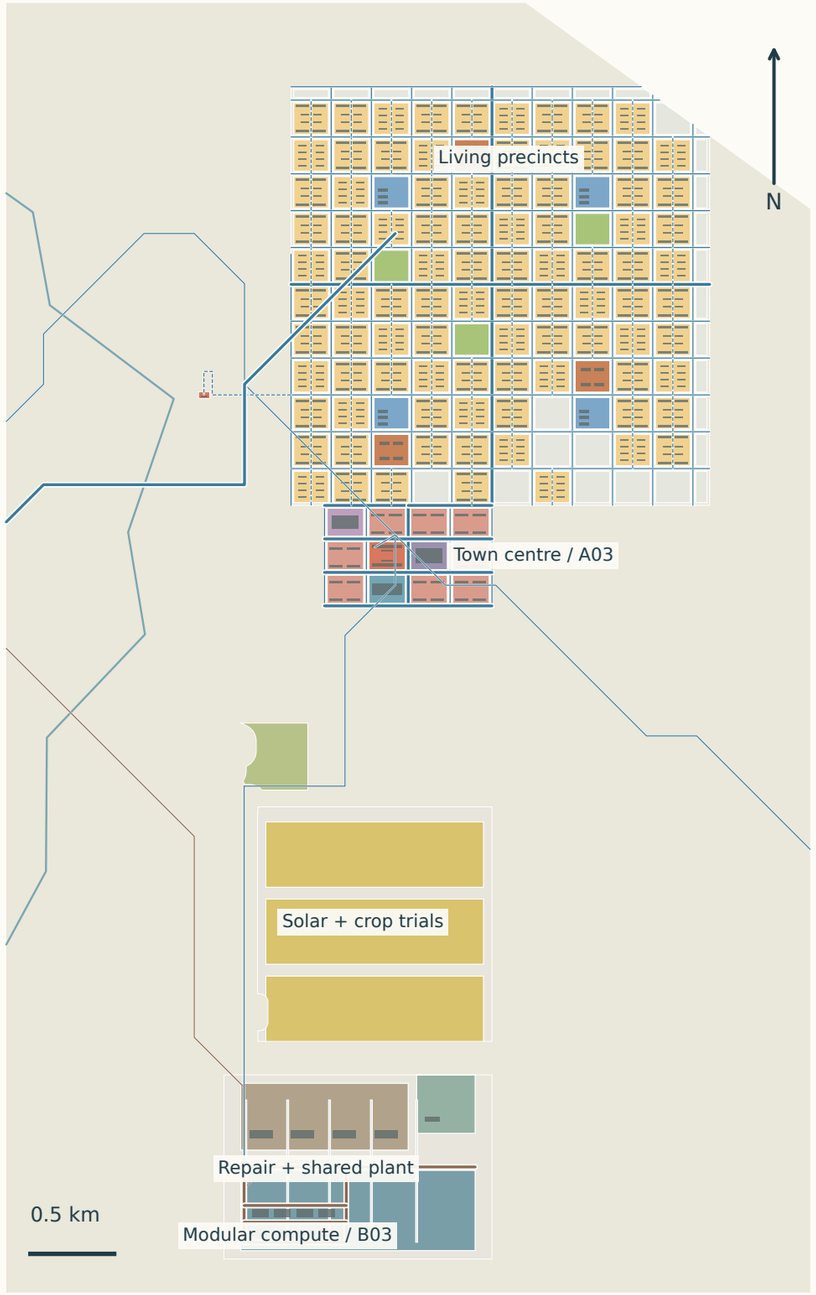

- Living precincts
- Public commons
- Education / daily services
- Solar + crop trial areas
- Compute halls
- Repair / productive uses
- Passenger / shared movement
- Machine servicing
- Source seasonal channels


The productive estate remains separate.
Shared plant serves compact modular halls.
The shuttle follows the solar edge.

This is a local enlargement;
the red footprint on the full-site plan
locates it within the entire territory.


One territory, six planning questions

Each overlay uses the same issued boundary and source channels. Detailed street and service design is enlarged separately.


Structure / connected centres

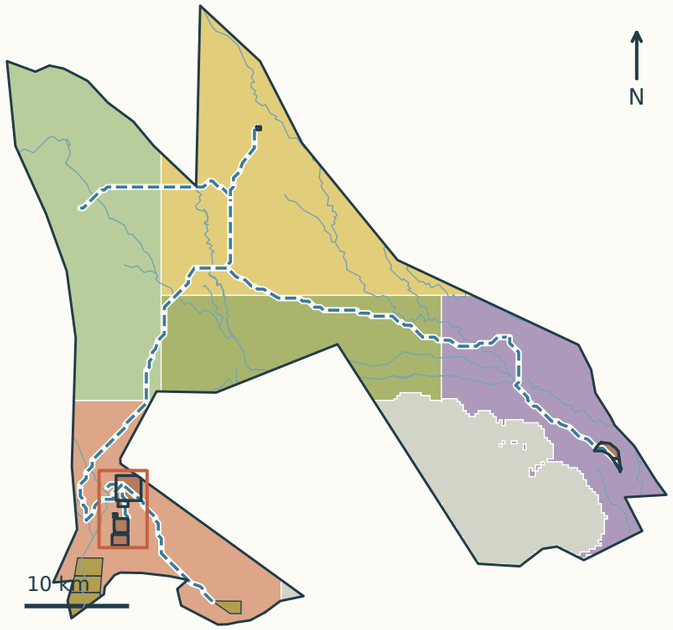


Functions / strategic districts

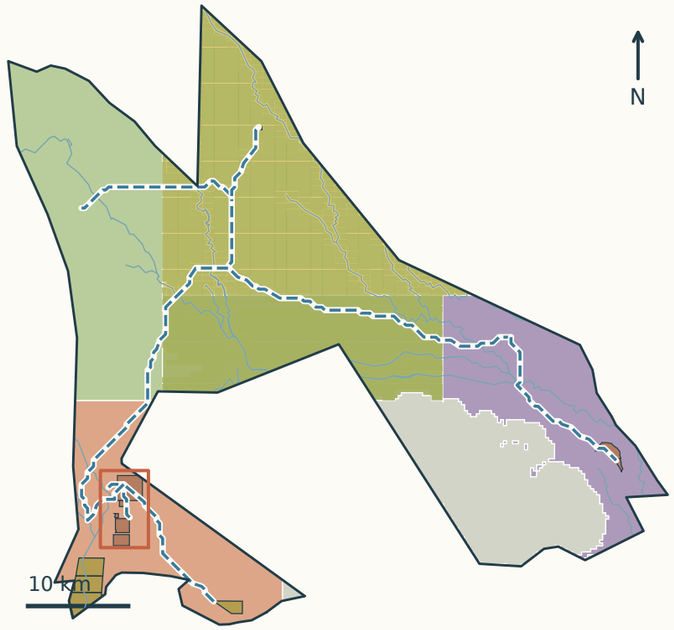


Mobility / corridor reservations

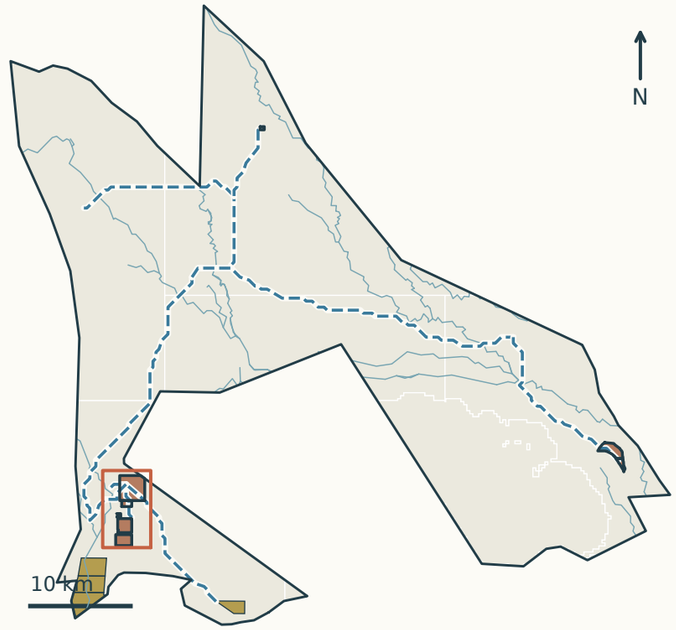


Ecology / drainage + retained terrain

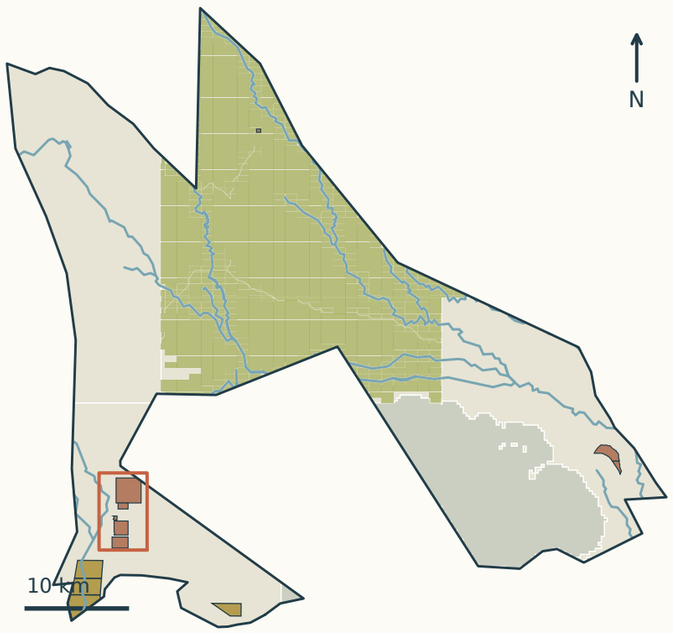

Land use / conditional field footprints

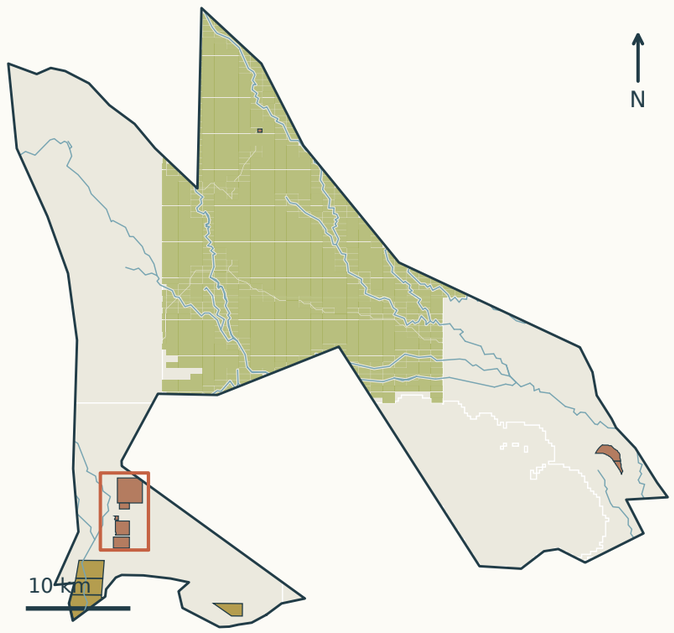

Services / settlement and work anchors

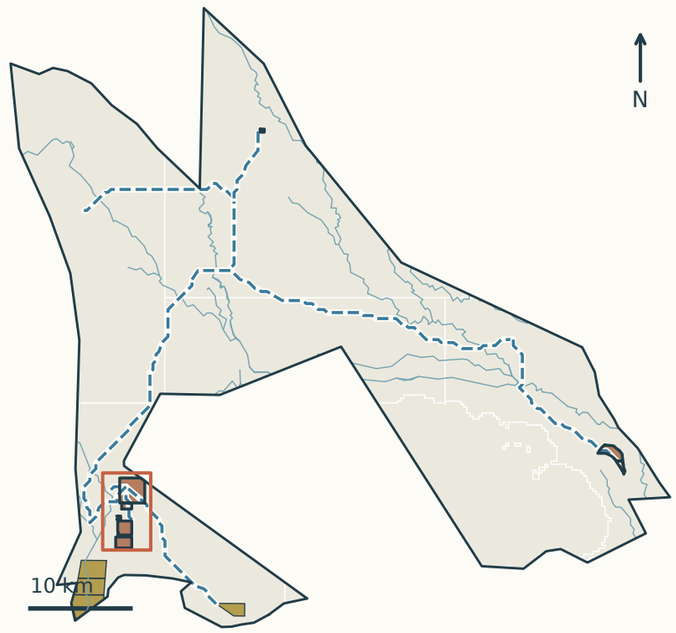

Blue dashed links are studies, not acquired roads. Green fields are conditional opportunities, not installed PV. Retained mountain ground is not vacant development land.

A03 / a public centre within the street network

AI-finished view from registered source control. Images illustrate design; they are not survey or engineering evidence.



The public-space view is local; the whole-site energy programme is shown on the territorial plans.

A03 / shade, market frontage and everyday public life


AI-finished view from registered source control. Images illustrate design; they are not survey or engineering evidence.




The public-space view is local; the whole-site energy programme is shown on the territorial plans.

AGUA FINITA / THE ENERGY LANDSCAPE AND THE CITY

V12 spatial control / full issued territory with a production enlargement / source terrain, no vertical exaggeration

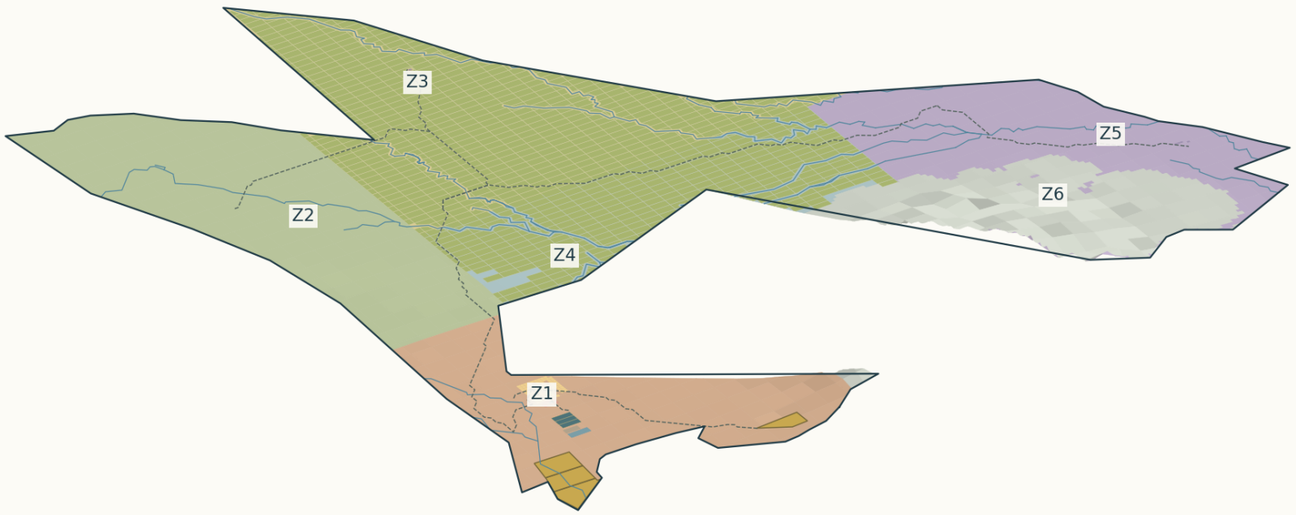

PRODUCTION INTERFACE / ENLARGED

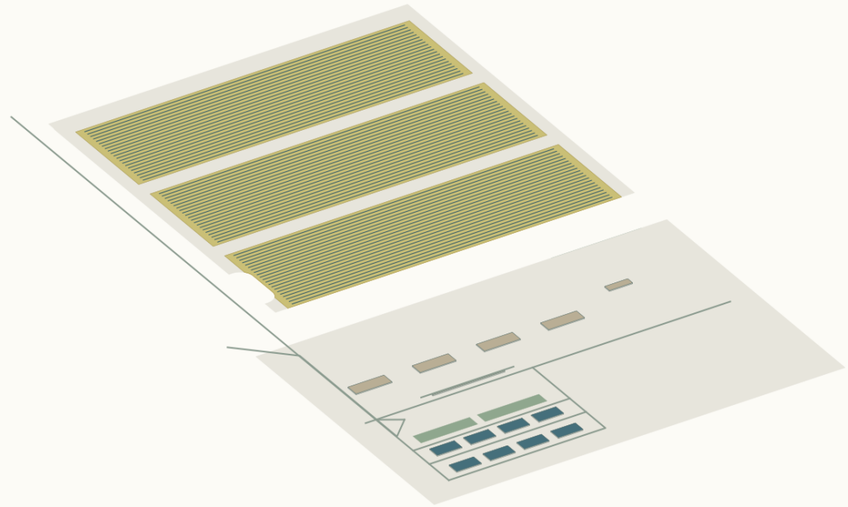


PV extensions + crop operations
Shared power / cooling plots + modular compute halls
Repair workshops + separate service access

Z1 Southwest city + production Z2 Agricultural research
Z3 Energy / solar-agricultural opportunity
Z4 Production + transfer Z5 Gateway Z6 Mountain stewardship

Olive fields are resource-gated long-term agrivoltaic proposals, not completed arrays. Gold outlines identify fixed pilots without replacing their internal layout. Individual buildings are small at territorial scale. The inset uses a flat working datum; terrain fit and equipment engineering remain open.

AGUA FINITA / FIELDS FOLLOW THE GROUND

V12 whole-territory design study / conditional agrivoltaic extension, source channels and issued site boundary

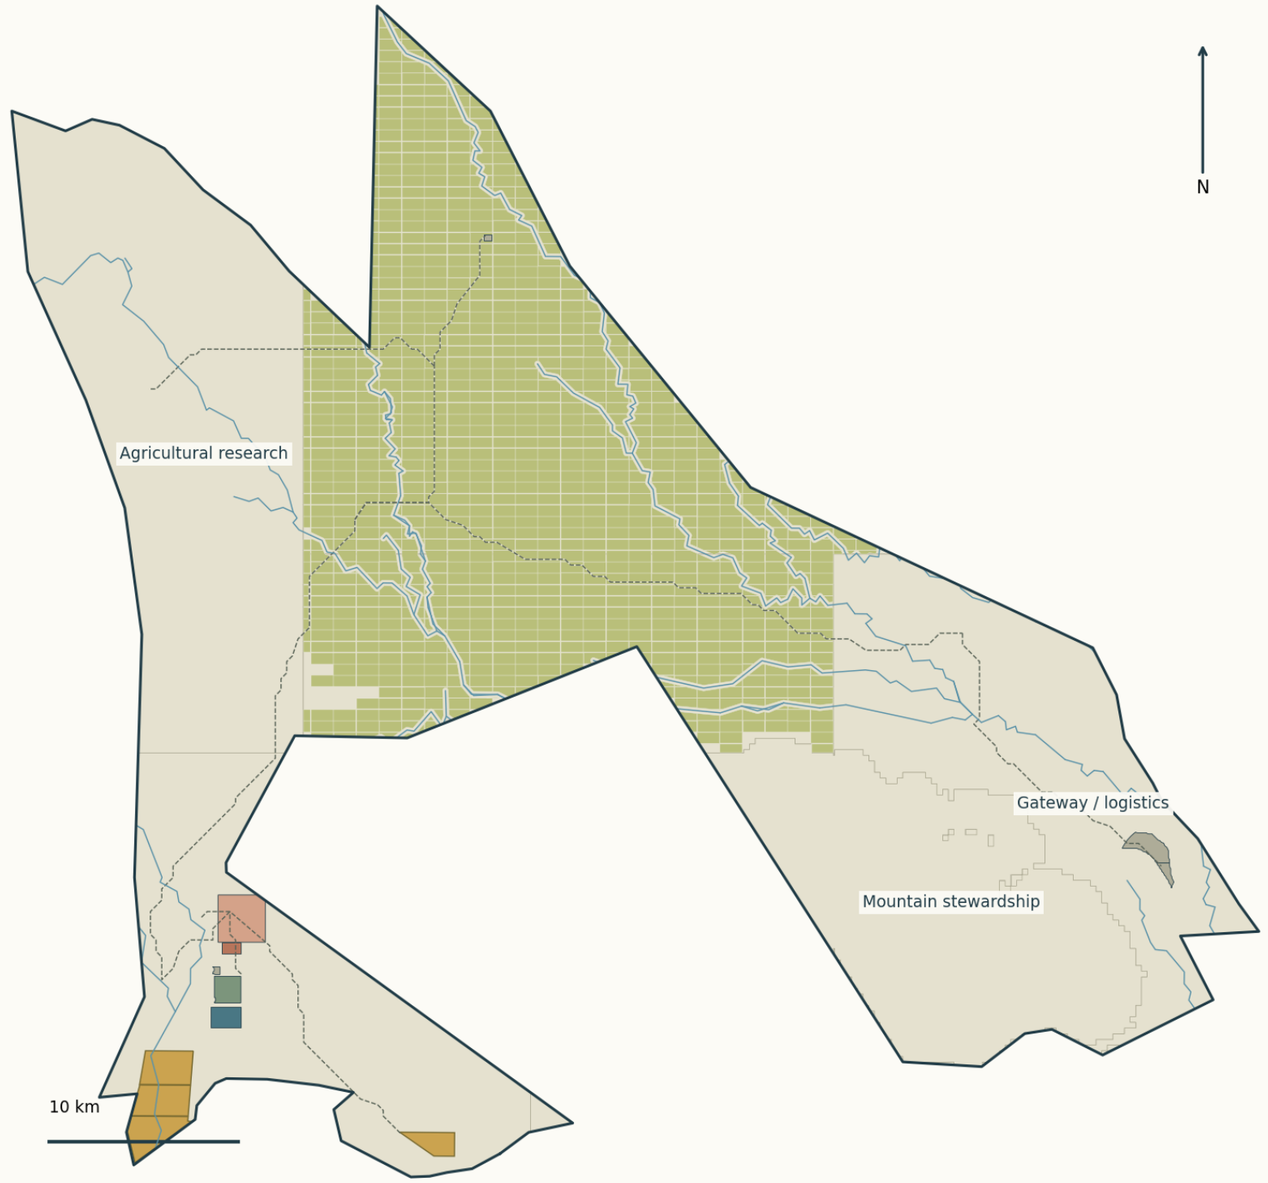

CONTINUITY WITH REASONS

Olive / future field footprints
Gold / protected fixed pilots
Blue / source seasonal channels
Dashed / proposed regional roads
Dark outline / issued site boundary

Channels break the field pattern.
Steeper ground stays outside
this production layout.
Service lanes separate work blocks.

Future fields are not installed PV.
Water, power and market gates
control actual construction.

Design assumptions: 1,200 x 600 m working blocks, 12 m edge strips, p95 slope <= 5%, 150 m channel screening corridor. These are not statutory standards.
Field footprints are clipped to the current issued boundary and avoid protected pilots. Existing pilot interiors are neither inferred nor replaced.

Compute halls: compact work, shared infrastructure

Eight existing hall footprints and the declared 2 / 4 / 8 MW IT scenario retained. No new installed capacity is claimed.



SPATIAL DECISIONS

Separate halls; shared services.

Short internal service loop.

Repair lies north on the freight spine. See overall plan.

Utility plots are protected from building encroachment.


No residential heat demand is invented to justify proximity.

Concept dimensions: 96 x 48 m halls; 36 m lateral gaps and 72 m between rows. These are design assumptions, not fire or vendor standards. Plant footprints reserve space, not equipment sizing. Verify cooling, electrical separation, lifting, turning and terrain before fixing the layout.

Construction phases: operate before expanding


One coordinated layout. Colour shows active halls; outlines show later works. Plant and access must be commissioned before IT starts.

PHASE 1 / 2 MW IT scenario

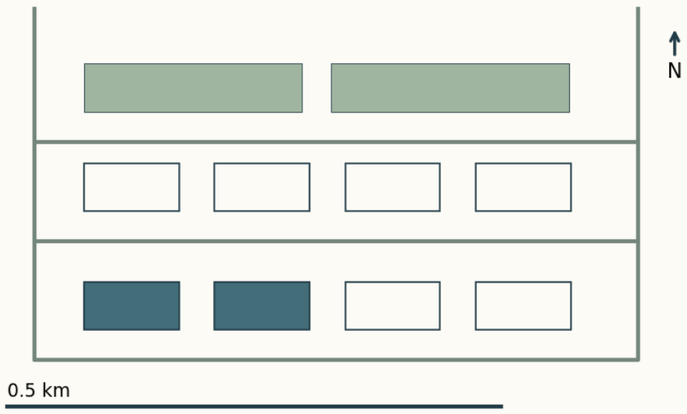


Commission access, power, cooling and two isolated halls.

PHASE 2 / 4 MW IT scenario

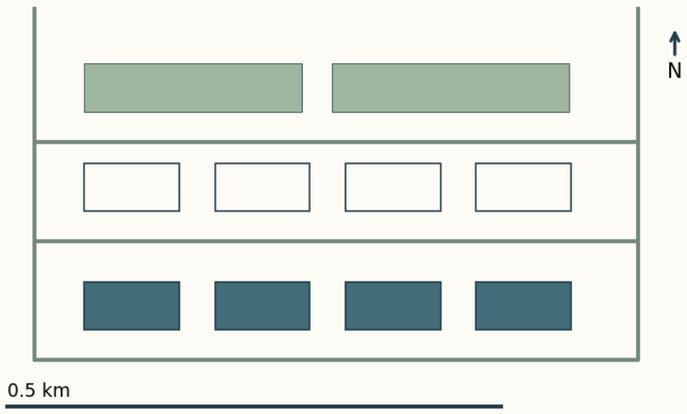

Add two halls after utility headroom, customer demand and resources.

PHASE 3 / 8 MW IT scenario

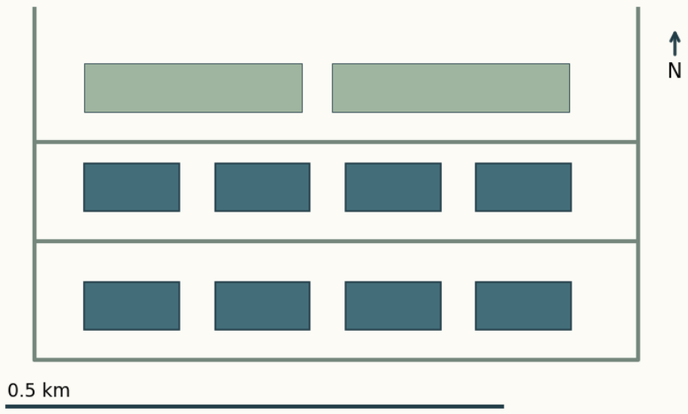


Add the second four-hall row; retain construction separation.

Retained IT values are declared design scenarios, not power-block ratings. Equipment configuration, peak site demand, interconnection and water rights remain unresolved.

Agrivoltaics: panels, crops and working space together

Proposed-extension prototype only. Existing pilot interiors remain unchanged. Dimensions below are declared design assumptions.

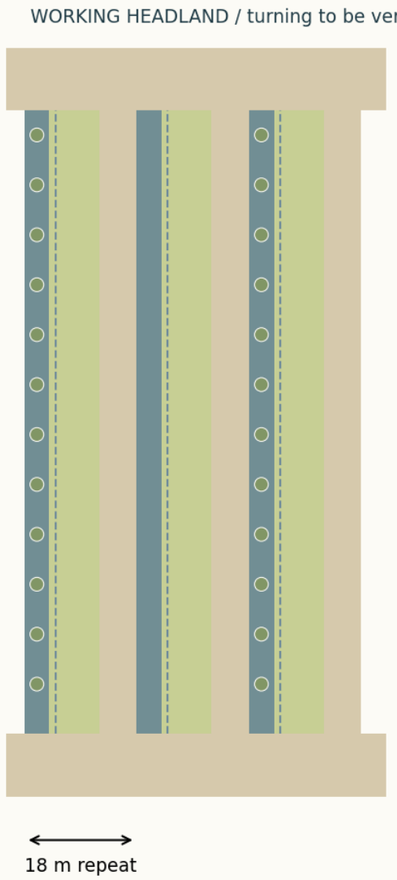

CULTIVATION + OPERATIONS


Blue bands: photovoltaic row envelopes.
Green ground: forage strips.
Circles: pruned jojoba scenario below alternate panel rows.
Sand: separate working lanes / headlands.
Dashed: zoned irrigation service.

Final crop mix, male/female layout, clearances and irrigation follow agronomy and equipment verification. Drought tolerance is not zero demand.

Assumed 4 m panel envelope + 8 m forage/worked ground + 6 m service lane. Under-panel forage and jojoba both remain production uses.
Planting circles illustrate mature/pruned working envelopes; they are not a verified yield, plant-density or pollination design.

Section: keep cultivation and maintenance possible

Extension study, not an approved mounting system. The fixed pilot is not redesigned by this section.

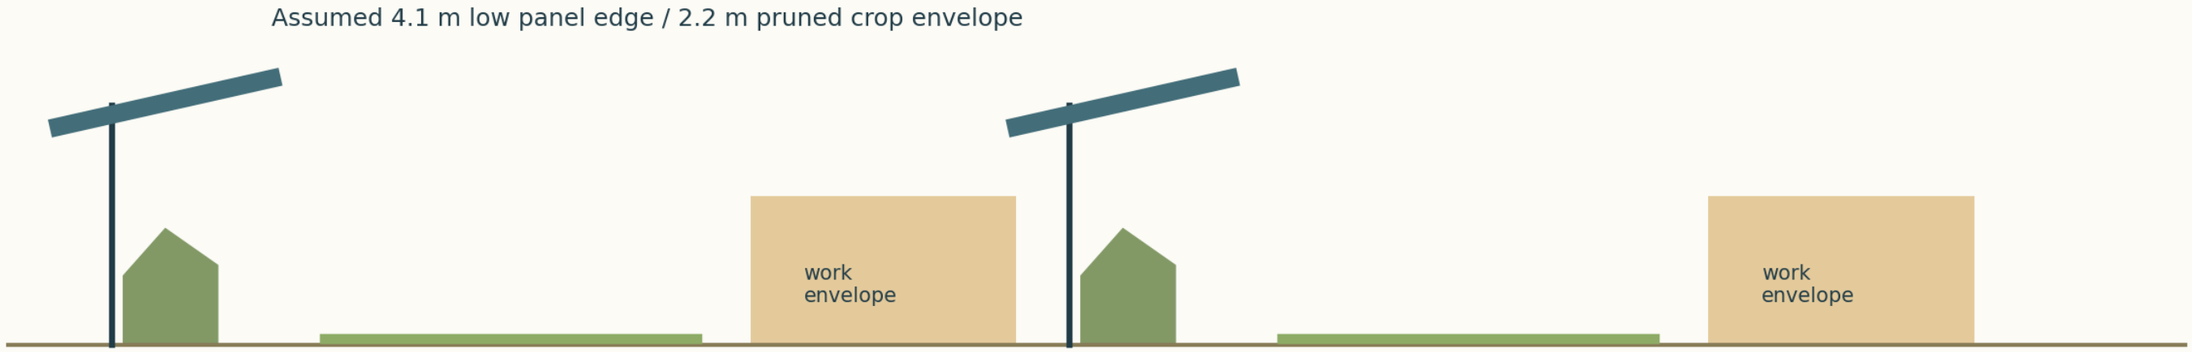


Test before fixing dimensions

Panel motion / structural depth; mature plant height and wind pollination; maintenance vehicles, safe working clearances, pruning and harvest; irrigation and drainage; electrical isolation. Do not infer an engineering clearance from the illustrated gap.

ARCHITECTURAL CONCEPT / C03

C03 / local seasonal-wash visitor edge

AI-finished view from registered source control. Images illustrate design; they are not survey or engineering evidence.

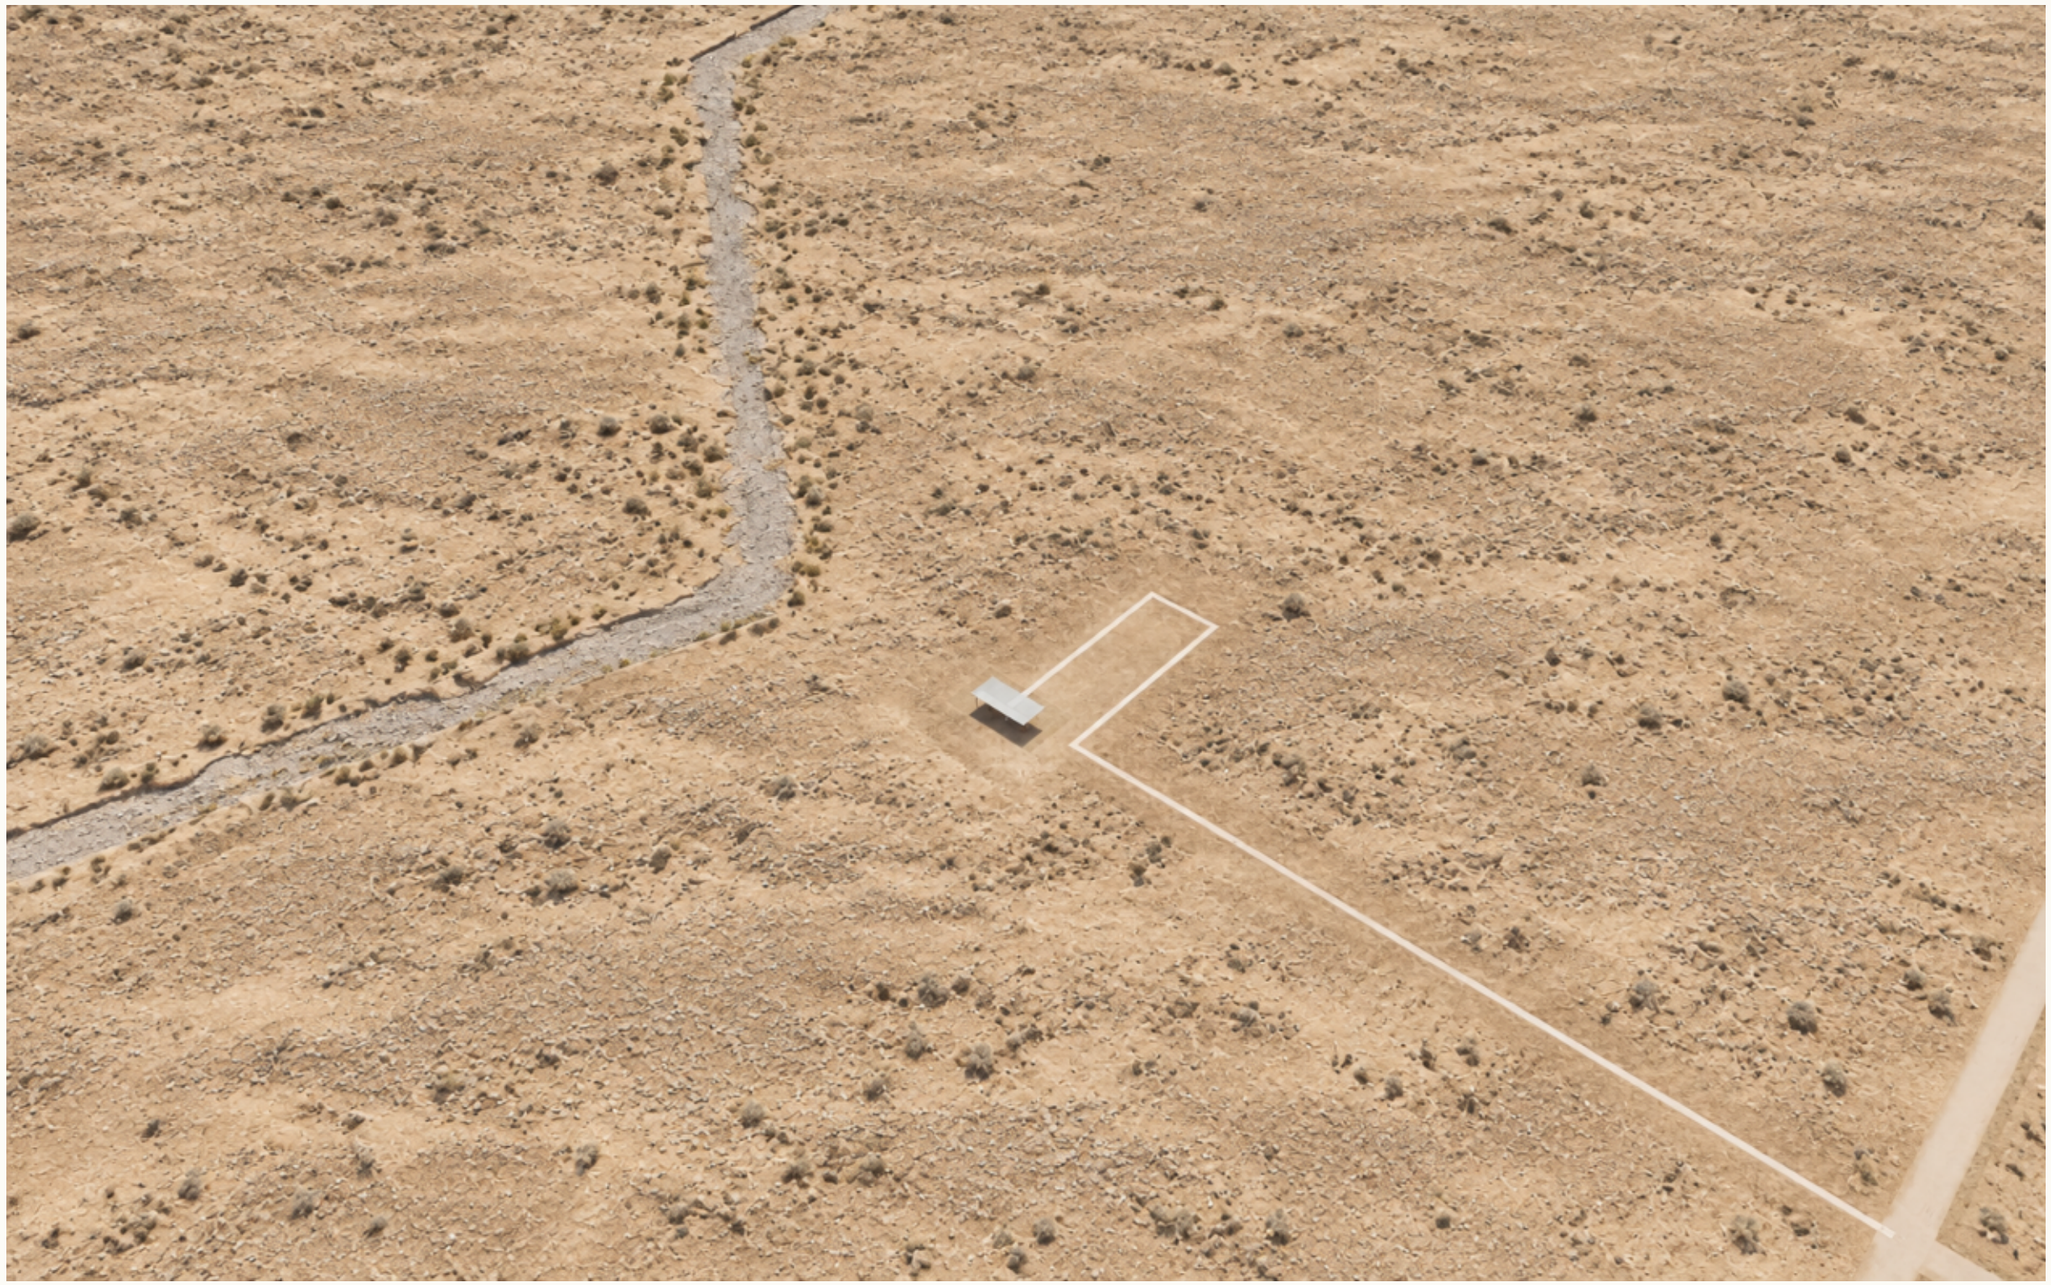

C03 remains a limited local study; these views do not establish the full seasonal river park, hydraulic safety or crossings.

ARCHITECTURAL CONCEPT / C03

C03 / a limited visitor-edge study

AI-finished view from registered source control. Images illustrate design; they are not survey or engineering evidence.



C03 remains a limited local study; these views do not establish the full seasonal river park, hydraulic safety or crossings.