AGUA FINITA / AN ENERGY LANDSCAPE THAT WORKS

V12 / Whole-site production, source channels, a compact compute campus and resource-gated construction

AGUA FINITA / FIELDS FOLLOW THE GROUND

V12 whole-territory design study / conditional agrivoltaic extension, source channels and issued site boundary



CONTINUITY WITH REASONS

Olive / future field footprints
Gold / protected fixed pilots
Blue / source seasonal channels
Dashed / proposed regional roads
Dark outline / issued site boundary

Channels break the field pattern.
Steeper ground stays outside
this production layout.
Service lanes separate work blocks.

Future fields are not installed PV.
Water, power and market gates
control actual construction.


Design assumptions: 1,200 x 600 m working blocks, 12 m edge strips, p95 slope <= 5%, 150 m channel screening corridor. These are not statutory standards.
Field footprints are clipped to the current issued boundary and avoid protected pilots. Existing pilot interiors are neither inferred nor replaced.

Fixed pilot forage and jojoba retained. New field areas are conditional planning opportunities, not installed PV or secured irrigation.


The booklet contains spatial construction phases and the panel / crop / service plan and section. Full accounts remain in technical records.

AGUA FINITA / THE ENERGY LANDSCAPE AND THE CITY

V12 spatial control / full issued territory with a production enlargement / source terrain, no vertical exaggeration

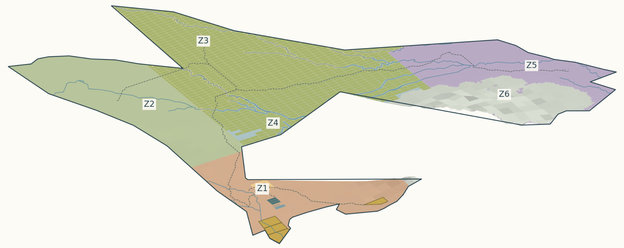

PRODUCTION INTERFACE / ENLARGED

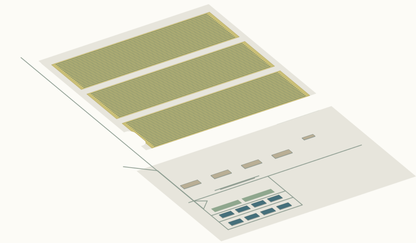

PV extensions + crop operations
Shared power / cooling plots + modular compute halls
Repair workshops + separate service access

Z1 Southwest city + production Z2 Agricultural research
Z3 Energy / solar-agricultural opportunity
Z4 Production + transfer Z5 Gateway Z6 Mountain stewardship

Olive fields are resource-gated long-term agrivoltaic proposals, not completed arrays. Gold outlines identify fixed pilots without replacing their internal layout.
Individual buildings are small at territorial scale. The inset uses a flat working datum; terrain fit and equipment engineering remain open.

AGUA FINITA / V12

Compute halls: compact work, shared infrastructure

Eight existing hall footprints and the declared 2 / 4 / 8 MW IT scenario retained. No new installed capacity is claimed.



SPATIAL DECISIONS

Separate halls; shared services.

Short internal service loop.

Repair lies north on the freight spine. See overall plan.

Utility plots are protected from
building encroachment.

No residential heat demand
is invented to justify proximity.

Concept dimensions: 96 x 48 m halls; 36 m lateral gaps and 72 m between rows. These are design assumptions, not fire or vendor standards.
Plant footprints reserve space, not equipment sizing. Verify cooling, electrical separation, lifting, turning and terrain before fixing the layout.