
One primary living district; production at regional scale

Whole-site structure / the existing fixed living quarter remains distinct / no new remote town population is assumed.

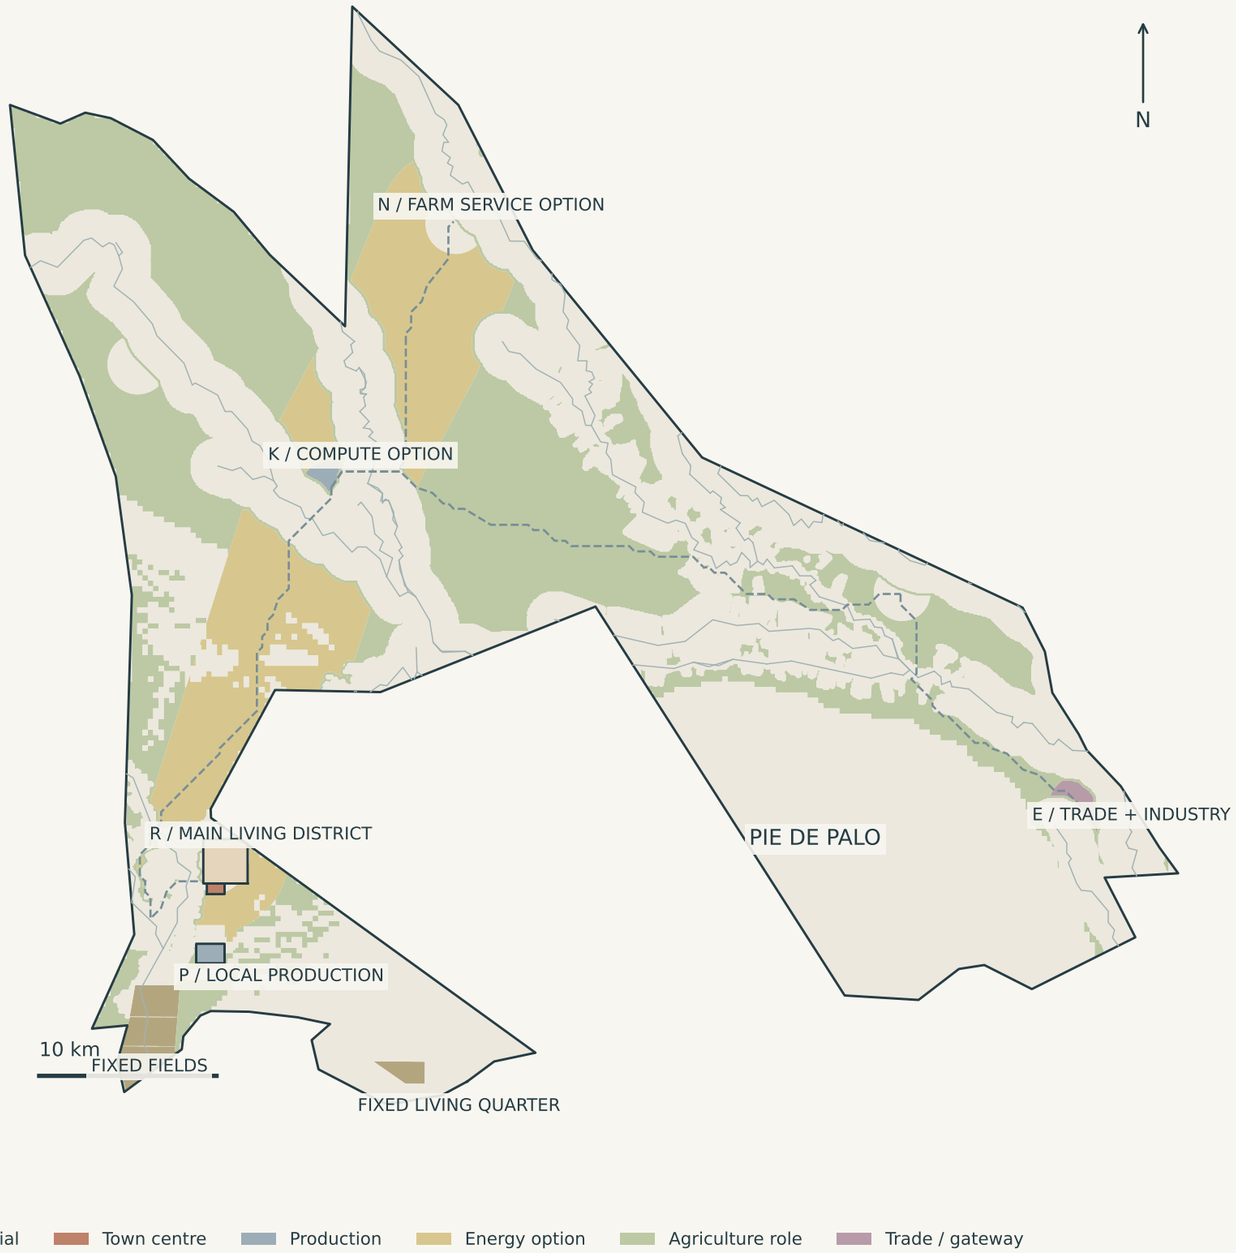

A continuous residential district

R is the primary new residential planning envelope. It grows in connected precincts, with everyday services inside. Existing pilot housing is a separate fixed project; its capacity and completion are unknown.

A hierarchy of production places

P handles initial compute, repair and maintenance outside residential land. K is a later central compute option. N is a conditional farm-service point, not an automatic new town. E holds gateway industry and trade.

Connections carry different flows


Passenger arrival goes to the town-centre edge. Regional freight bypasses residential land. Remote production relies on verified service and transport arrangements rather than a repeated miniature city.

Capacity is re-established

The V7 three-town population ledger is withdrawn. New capacities follow land, service, access and resource tests. All five systems retain a whole-site role; reserves are not installed capacity.

Separate districts and measured corridor studies

South-west site / real boundaries and terrain screening / gross planning envelopes are distinct from first releases.

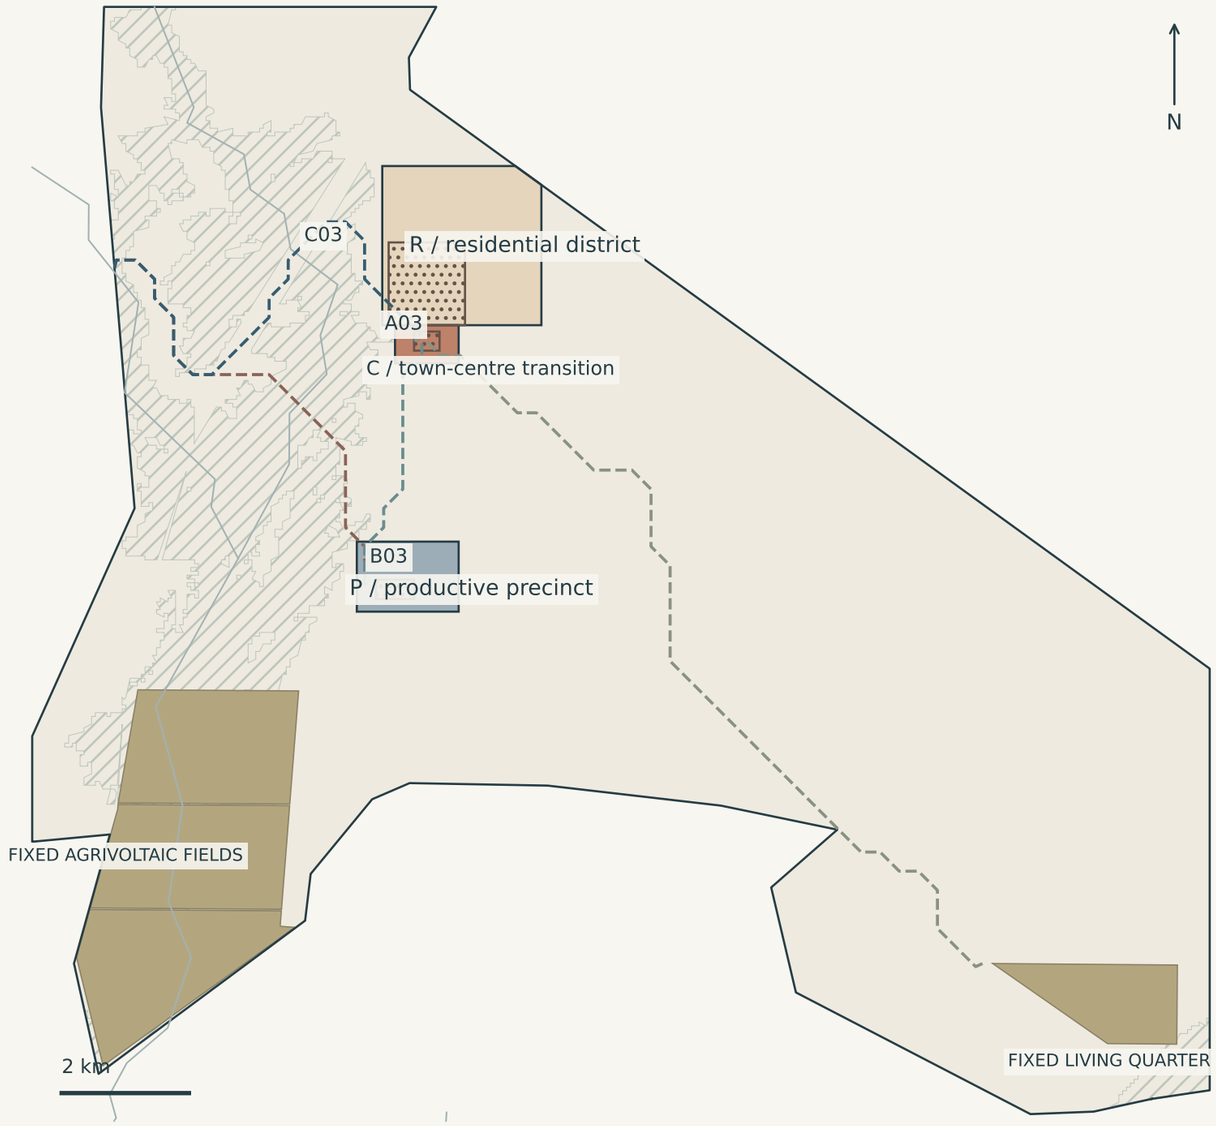

R and P are different districts

R planning envelope: 6.19 km2. P: 1.76 km2. Nearest R-to-P boundary gap: 3.40 km. This is a design separation, not a claimed legal or acoustic setback.

C / a compact mixed-use transition

The 0.60 km2 gross centre envelope meets R at its southern edge. Initial C0 is only 12 ha. Passenger arrival, public activity and later mixed-use blocks concentrate here; the entire envelope is not paved or built at once.

The fixed quarter is not next door


The candidate fixed-quarter connection is 14.8 km. It is a route study, not an acquired or operating road. The new district cannot claim to provide walkable services to that separate quarter.

Protection and uncertainty

Hatching is DEM flood sensitivity, not a lake. Channel crossings need engineering. Both fixed pilot parts remain unchanged; array crops remain forage grass and jojoba.

Residential continuity comes before the housing count

R contains homes, daily services, local streets and neighbourhood public space. Compute, yards and heavy freight remain outside R.

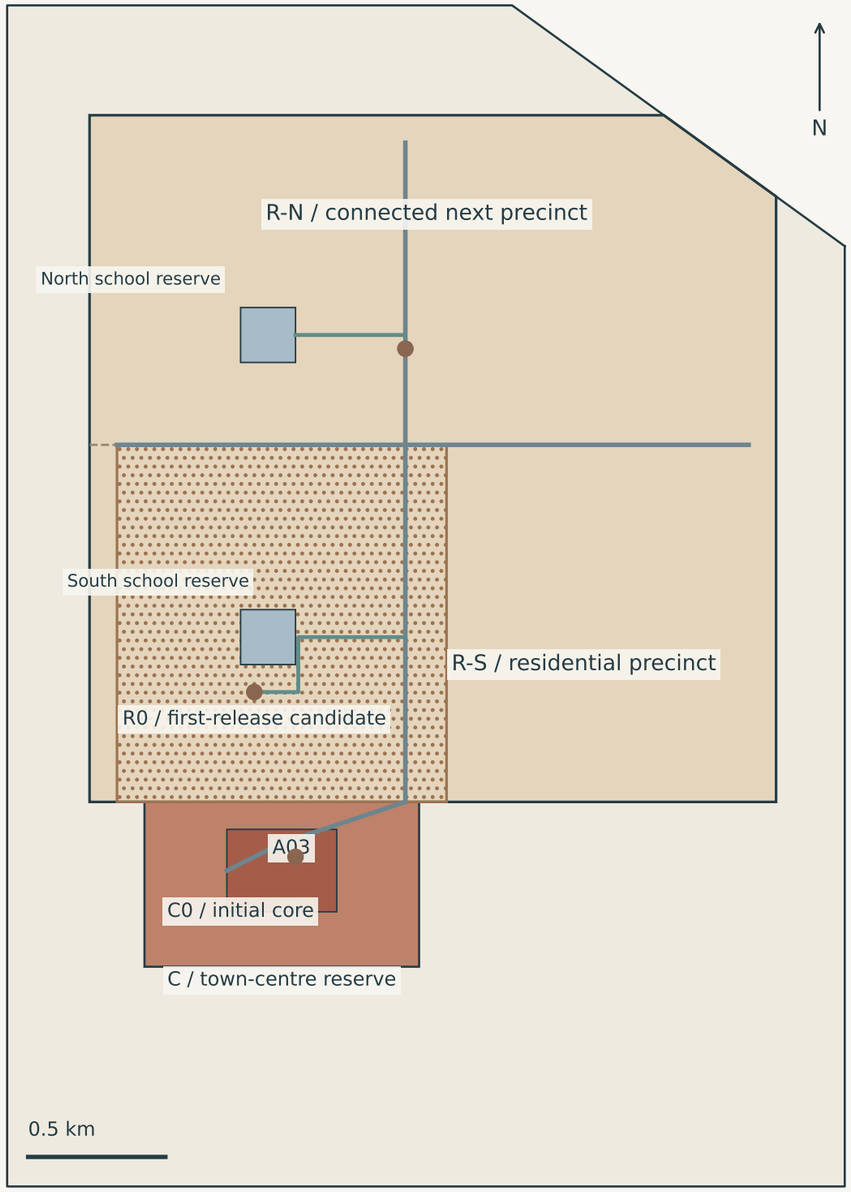

One fabric, developed in increments

R-S and R-N are connected precincts of one residential district. Their dividing collector is a local street, not an industrial or institutional strip. Complete blocks and housing types will be fitted to this structure next.

Daily service stays with residents

Schools and shared sport, daily shops, local care and neighbourhood public space belong inside R. The two school reservations correspond to different release stages; their places are not assumed from a rectangle on the map.

Town-centre and daily-service roles


C provides town-level public activity, arrival, mixed use and higher-order services. It does not replace the residential daily network. Large institutions are not added without a service catchment and delivery case.

Capacity follows the land and services

R0 is a 156 ha release-search area. Define net housing land, service capacity and a reliable water budget, then determine first occupancy. The first release need not fill the entire search area.

Keep heavy freight out of the living district

All route lengths are measured candidate alignments. The corridor search uses 300 m terrain cells and requires detailed survey and engineering.

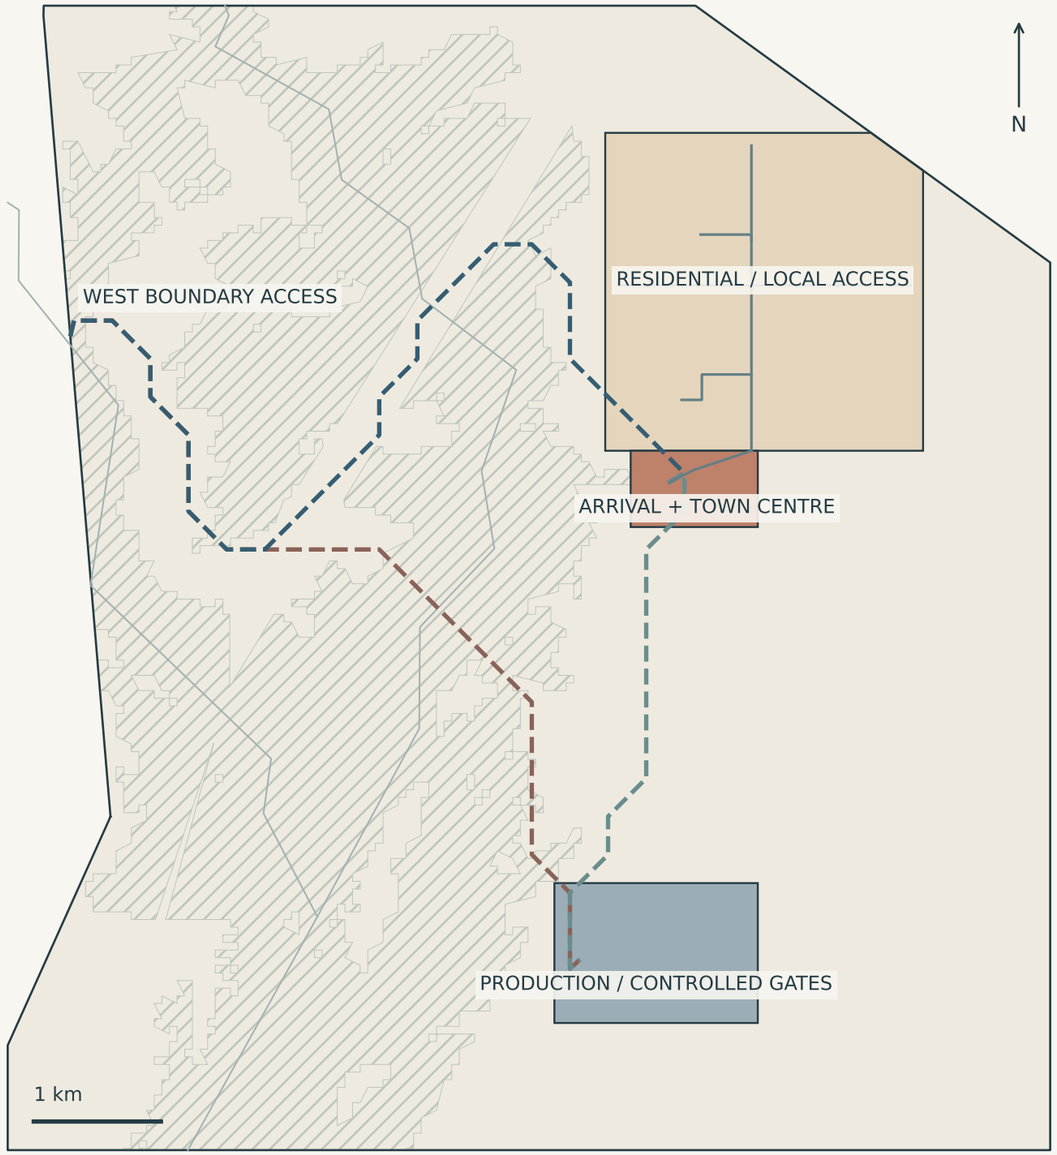

F / freight to production

7.83 km corridor candidate. Geometry intersects R for 0 m and C for 0 m. This tests district separation; it does not prove junction design, road capacity or noise performance.

A / people arrive at the centre

8.79 km candidate approach to the town-centre edge. Local streets and public transport continue into R. Long-distance goods do not use the residential collector as a shortcut.

S / workers connect between places

4.52 km shuttle alignment between C and P. Some approach segments may share road infrastructure under managed operations. A road connection does not make P a walkable neighbourhood facility.

Engineering and access work

Mapped channel and sensitivity crossings remain explicit engineering work. Regional RN40 access rights and its final junction are unselected. No road is described as existing merely because it is drawn.

Function and phase have different scales

A complete first phase is a connected operating system. Each residential neighbourhood is not required to reproduce every urban function.

Scale / role	Belongs here	Interface rule
R / residential	Homes; daily shops; schools; care; local public space	Local streets and walking; no compute campus
C / town centre	Arrival; public activity; mixed use; staged higher services	Connects to R; does not replace local provision
P / production	Compute; cooling; repair; service yards; plant	Own gates, freight access and operating controls
Regional systems	Power; agriculture; gateway; major resource corridors	Distributed; conditional; separate rights and accounts

PHASE 1 / establish the system

R0 + C0 + P0, with their enabling works. First housing opens only with local education/care, water, waste, power, access and operating funding. Verify fixed-quarter stock and demand before releasing competing housing.

PHASE 2 / complete connected districts

Extend the same residential fabric and its service capacity before another housing centre. Expand C and P independently as demand and resources permit. C03 visitor paths may open after hydraulic and access work; channel protection starts immediately.

PHASE 3 / test regional options

K and the eastern gateway require separate power, water, access and demand decisions. A remote service point does not become a town by default. No population is assigned to a coloured production reservation.

SOURCE-BASED CORRECTION

V7 east alternative: 95th-percentile source-cell slope 16.78%. Current P envelope: 4.86%.
The new selection still requires platform studies. A low slope at one centre cell was not sufficient evidence for the former site.

NEXT DESIGN TEST / terrain-fit blocks, net land and service capacity, occupancy tranches and a matching resource budget. No new final rendering or compliant A0 is claimed.