

THE EVERYDAY CITY

CONTINUOUS LIVING DISTRICTS / SHARED PUBLIC GROUND / INDEPENDENT PRODUCTIVE EDGES

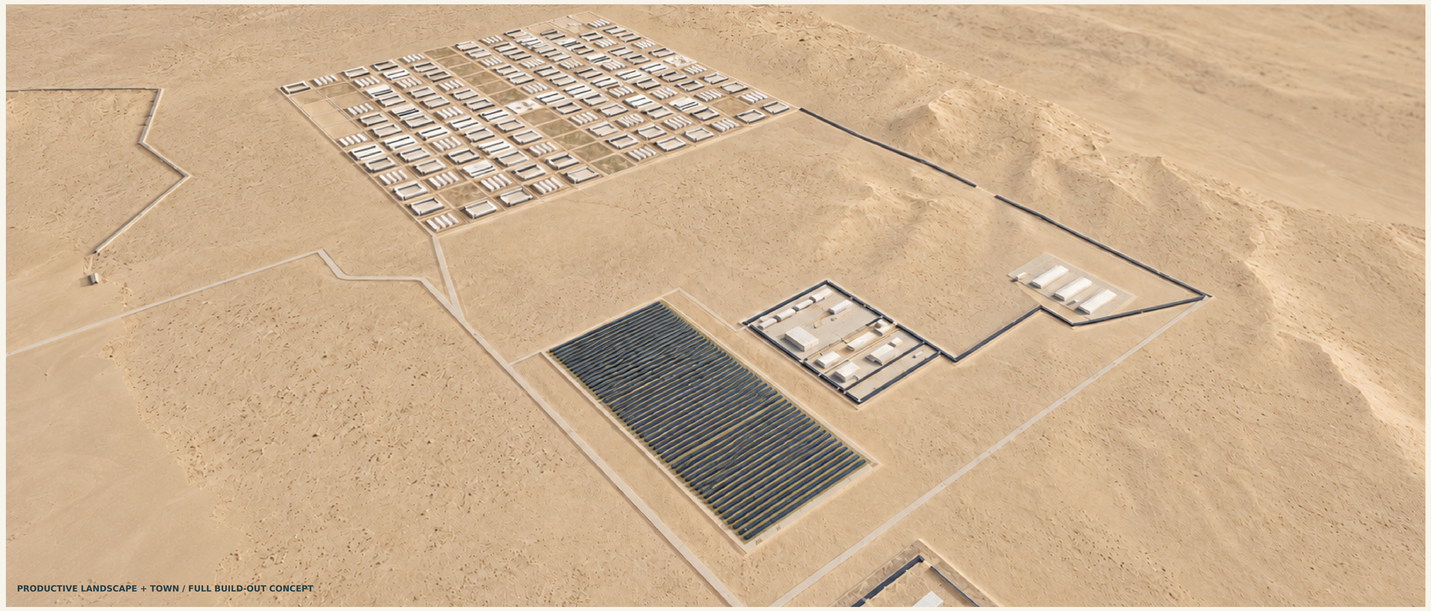


PRODUCTIVE LANDSCAPE + TOWN / FULL BUILD-OUT CONCEPT


WHOLE-SITE ZONING + ROAD FRAMEWORK

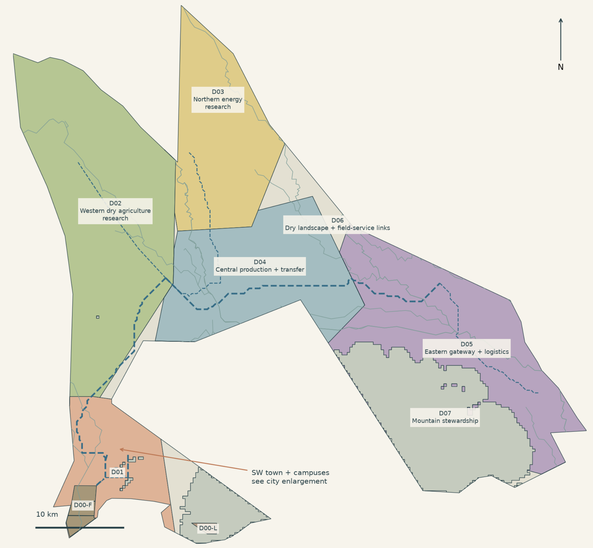


DISTRICTS + CIVIC BAND

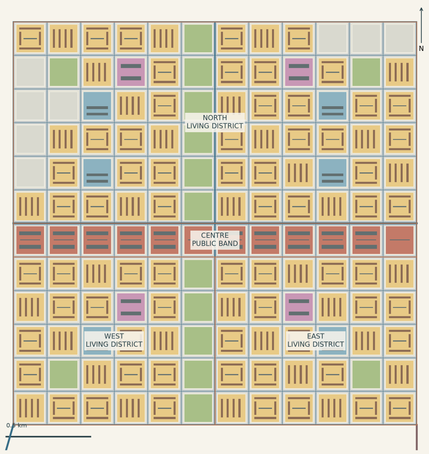


STREETS + PUBLIC MOVEMENT

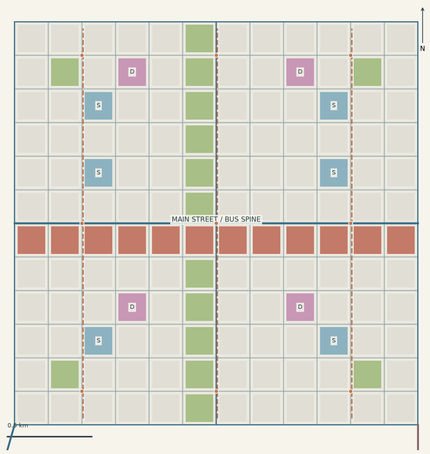

DRY COMMONS + SHADE LINKS

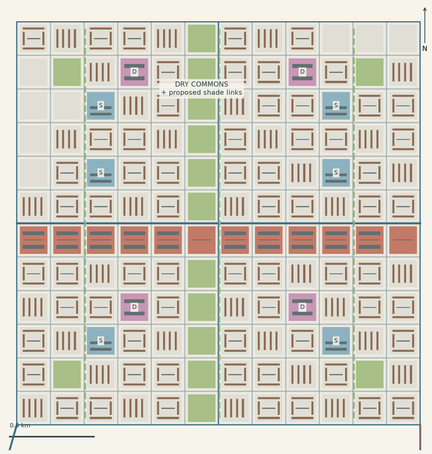

THREE CONDITIONAL STAGES

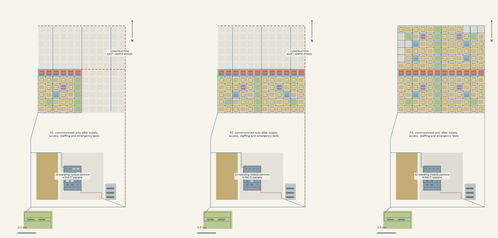

P1 / 4,440 residents / 1,776 homes

Years 0-5 scenario; access, resources, demand and funded services first.

P2 / 9,720 residents / 3,888 homes

Years 5-10 conditional; access, resources, demand and funded services first.

P3 / 19,680 residents / 7,872 homes

Years 10-20 conditional; access, resources, demand and funded services first.

THREE LOCATED PLACES / A01 WEST HOUSING / B03 SOUTHERN WORKS / C02 NEW FARM-LEARNING CAMPUS

A01 / Open-court homes




LOCAL AERIAL



EYE LEVEL

Three-storey housing, shared mineral court and an explicit shade band. Local aerial; full-build-out context.

B03 / An independent productive campus

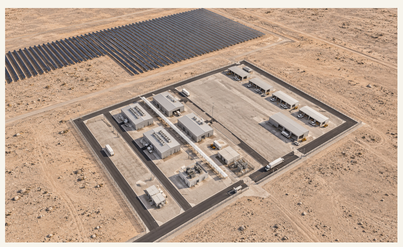

LOCAL AERIAL



EYE LEVEL

Four staged modular-service groups, repair sheds, utility servicing and a separate worker shade spine. Local aerial; all stages shown.

C02 / A working farm-learning edge



LOCAL AERIAL



EYE LEVEL

Two farm halls now meet a29m public forecourt and shaded promenade; rear loading remains separate. Close partial aerial; field ends cropped. Proposed forage/jojoba under8 rows; irrigation entitlement unconfirmed.

7,872 homes / 19,680 residents are full-build-out design capacities, not proven demand. Town-to-compute edge separation: 1.1 km; no residential heat pipe. Green diagram links are proposed dry-landscape/walking/shade opportunities, not mature trees. All images are illustrative finishes over registered geometry controls. Full source, phase and resource accounts are in the technical appendix; no spreadsheet tables appear on this board.

JINGYUAN HUANG / V3 / 27 OCT 2026